



ZUMTOBEL

**ZOOM! 10 Day
Quick Ship
Program**

Effective December 1, 2014
Supersedes all previous
guides

THIS PAGE INTENTIONALLY LEFT BLANK



ZOOM! 10 Day Terms & Conditions

- ZOOM! 10 Day products ship within (10) business days.
- Place your order through your Zumtobel client services representative.
- Freight allowance for ZOOM! 10 Day orders requires a minimum \$2,000 order.
- Standard Zumtobel Lighting Terms & Conditions (as they appear in our Price Guide) apply. Contact your Zumtobel client services representative for more information.

ZOOM! 10 Day Table of Contents

• SLOTLIGHTLEDII.....	Page5
• BASYSLEDII.....	Page14
• SPEC-5.....	Page32
• GLOBALTrack.....	Page36
• KAVEROS.....	Page38
• ML4.....	Page40
• ZX52.....	Page46
• SLOTLIGHT.....	Page48

THIS PAGE INTENTIONALLY LEFT BLANK



SLOTLIGHT LED II

- Ideal for applications in restricted space
- 2,5", 4" or 6" aperture
- Lengths are nominal
- Opal Flush Lens
- Emergency back-up options available

2 1/2" Recessed,
Individual

SLEDI	2					P	W	DU		
FIXTURE	WIDTH	MOUNTING	LIGHT LEVEL	LED	LENGTH	OPTIC	COLOR	DRIVER	OPTIONS	ORDERING PART NUMBER
SLEDI SLOTLIGHT LED II Individual Recessed	2 2 1/2"	EA Flangeless - After Sheetrock	04 450 lm/ft	835 80 CRI, 3500 K	04 4'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025387
									EL Standby Battery Pack, Left Side	11025388
					08 8'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025399
									EL Standby Battery Pack, Left Side	11025400
					12 12'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025411
									EL Standby Battery Pack, Left Side	11025412
			07 750 lm/ft	835 80 CRI, 3500 K	04 4'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025389
									EL Standby Battery Pack, Left Side	11025390
					08 8'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025401
									EL Standby Battery Pack, Left Side	11025402
					12 12'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025413
									EL Standby Battery Pack, Left Side	11025414



SLOTLIGHT LED II

- Ideal for applications in restricted space
- 2,5", 4" or 6" aperture
- Lengths are nominal
- Opal Flush Lens
- Emergency back-up options available

2 1/2" Recessed,
Individual

SLEDI	2					P	W	DU		
FIXTURE	WIDTH	MOUNTING	LIGHT LEVEL	LED	LENGTH	OPTIC	COLOR	DRIVER	OPTIONS	ORDERING PART NUMBER
SLEDI SLOTLIGHT LED II Individual Recessed	2 2 1/2"	SG Lay-in, 9/16" Slotgrid or Tegular *	04 450 lm/ft	835 80 CRI, 3500 K	04 4'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025391
									EL Standby Battery Pack, Left Side	11025392
					08 8'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025403
									EL Standby Battery Pack, Left Side	11025404
					12 12'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025415
									EL Standby Battery Pack, Left Side	11025416
			07 750 lm/ft	835 80 CRI, 3500 K	04 4'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025393
									EL Standby Battery Pack, Left Side	11025394
					08 8'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025405
									EL Standby Battery Pack, Left Side	11025406
					12 12'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025417
									EL Standby Battery Pack, Left Side	11025418

* Lay-In fixtures compatible with Armstrong TechZone and USG Logix Ceilings



SLOTLIGHT LED II

2 1/2" Recessed,
Individual

- Ideal for applications in restricted space
- 2,5", 4" or 6" aperture
- Lengths are nominal
- Opal Flush Lens
- Emergency back-up options available

SLEDI	2					P	W	DU		
FIXTURE	WIDTH	MOUNTING	LIGHT LEVEL	LED	LENGTH	OPTIC	COLOR	DRIVER	OPTIONS	ORDERING PART NUMBER
SLEDI SLOTLIGHT LED II Individual Recessed	2 2 1/2"	IW Lay-in, 15/16" Tee *	04 450 lm/ft	835 80 CRI, 3500 K	04 4'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025395
									EL Standby Battery Pack, Left Side	11025396
					08 8'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025407
									EL Standby Battery Pack, Left Side	11025408
					12 12'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025419
									EL Standby Battery Pack, Left Side	11025420
			07 750 lm/ft	835 80 CRI, 3500 K	04 4'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025397
									EL Standby Battery Pack, Left Side	11025398
					08 8'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025409
									EL Standby Battery Pack, Left Side	11025410
					12 12'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025421
									EL Standby Battery Pack, Left Side	11025422

* Lay-In fixtures compatible with Armstrong TechZone and USG Logix Ceilings



SLOTLIGHT LED II

4' Recessed,
Individual

- Ideal for applications in restricted space
- 2,5", 4" or 6" aperture
- Lengths are nominal
- Opal Flush Lens
- Emergency back-up options available

SLEDI	4					P	W	DU		
FIXTURE	WIDTH	MOUNTING	LIGHT LEVEL	LED	LENGTH	OPTIC	COLOR	DRIVER	OPTIONS	ORDERING PART NUMBER
SLEDI SLOTLIGHT LED II Individual Recessed	4 4'	EA Flangeless - After Sheetrock	04 450 lm/ft	835 80 CRI, 3500 K	04 4'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025423
									EL Standby Battery Pack, Left Side	11025424
					08 8'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025435
									EL Standby Battery Pack, Left Side	11025436
					12 12'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025447
									EL Standby Battery Pack, Left Side	11025448
			07 750 lm/ft	835 80 CRI, 3500 K	04 4'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025425
									EL Standby Battery Pack, Left Side	11025426
					08 8'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025437
									EL Standby Battery Pack, Left Side	11025438
					12 12'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025449
									EL Standby Battery Pack, Left Side	11025450



SLOTLIGHT LED II

- Ideal for applications in restricted space
- 2,5", 4" or 6" aperture
- Lengths are nominal
- Opal Flush Lens
- Emergency back-up options available

4' Recessed,
Individual

SLEDI	4					P	W	DU		
FIXTURE	WIDTH	MOUNTING	LIGHT LEVEL	LED	LENGTH	OPTIC	COLOR	DRIVER	OPTIONS	ORDERING PART NUMBER
SLEDI SLOTLIGHT LED II Individual Recessed	4 4'	SG Lay-in, 9/16" Slotgrid or Tegular *	04 450 lm/ft	835 80 CRI, 3500 K	04 4'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025427
									EL Standby Battery Pack, Left Side	11025428
					08 8'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025439
									EL Standby Battery Pack, Left Side	11025440
					12 12'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025451
									EL Standby Battery Pack, Left Side	11025452
			07 750 lm/ft	835 80 CRI, 3500 K	04 4'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025429
									EL Standby Battery Pack, Left Side	11025430
					08 8'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025441
									EL Standby Battery Pack, Left Side	11025442
					12 12'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025453
									EL Standby Battery Pack, Left Side	11025454

* Lay-In fixtures compatible with Armstrong TechZone and USG Logix Ceilings



SLOTLIGHT LED II

- Ideal for applications in restricted space
- 2,5", 4" or 6" aperture
- Lengths are nominal
- Opal Flush Lens
- Emergency back-up options available

4' Recessed,
Individual

SLEDI	4					P	W	DU		
FIXTURE	WIDTH	MOUNTING	LIGHT LEVEL	LED	LENGTH	OPTIC	COLOR	DRIVER	OPTIONS	ORDERING PART NUMBER
SLEDI SLOTLIGHT LED II Individual Recessed	4 4'	IW Lay-in, 15/16" Tee*	04 450 lm/ft	835 80 CRI, 3500 K	04 4'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025431
									EL Standby Battery Pack, Left Side	11025432
					08 8'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025443
									EL Standby Battery Pack, Left Side	11025444
					12 12'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025455
									EL Standby Battery Pack, Left Side	11025456
			07 750 lm/ft	835 80 CRI, 3500 K	04 4'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025433
									EL Standby Battery Pack, Left Side	11025434
					08 8'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025445
									EL Standby Battery Pack, Left Side	11025446
					12 12'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025457
									EL Standby Battery Pack, Left Side	11025980

* Lay-In fixtures compatible with Armstrong TechZone and USG Logix Ceilings



SLOTLIGHT LED II

6' Recessed,
Individual

- Ideal for applications in restricted space
- 2,5", 4" or 6" aperture
- Lengths are nominal
- Opal Flush Lens
- Emergency back-up options available

SLEDI	4					P	W	DU		
FIXTURE	WIDTH	MOUNTING	LIGHT LEVEL	LED	LENGTH	OPTIC	COLOR	DRIVER	OPTIONS	ORDERING PART NUMBER
SLEDI SLOTLIGHT LED II Individual Recessed	6 6'	EA Flange-less - After Sheetrock	04 450 lm/ft	835 80 CRI, 3500 K	04 4'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025464
									EL Standby Battery Pack, Left Side	11025466
					08 8'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025496
									EL Standby Battery Pack, Left Side	11025497
					12 12'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025484
									EL Standby Battery Pack, Left Side	11025485
			07 750 lm/ft	835 80 CRI, 3500 K	04 4'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025468
									EL Standby Battery Pack, Left Side	11025469
					08 8'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025498
									EL Standby Battery Pack, Left Side	11025499
					12 12'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025486
									EL Standby Battery Pack, Left Side	11025487



SLOTLIGHT LED II

6' Recessed,
Individual

- Ideal for applications in restricted space
- 2,5", 4" or 6" aperture
- Lengths are nominal
- Opal Flush Lens
- Emergency back-up options available

SLEDI	6					P	W	DU		
FIXTURE	WIDTH	MOUNTING	LIGHT LEVEL	LED	LENGTH	OPTIC	COLOR	DRIVER	OPTIONS	ORDERING PART NUMBER
SLEDI SLOTLIGHT LED II Individual Recessed	6'6"	SG Lay-in, 9/16" Slotgrid or Tegular*	04 450 lm/ft	835 80 CRI, 3500 K	04 4'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025470
									EL Standby Battery Pack, Left Side	11025472
					08 8'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025500
									EL Standby Battery Pack, Left Side	11025501
					12 12'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025488
									EL Standby Battery Pack, Left Side	11025489
			07 750 lm/ft	835 80 CRI, 3500 K	04 4'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025473
									EL Standby Battery Pack, Left Side	11025475
					08 8'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025502
									EL Standby Battery Pack, Left Side	11025503
					12 12'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025490
									EL Standby Battery Pack, Left Side	11025491

* Lay-In fixtures compatible with Armstrong TechZone and USG Logix Ceilings



SLOTLIGHT LED II

6' Recessed,
Individual

- Ideal for applications in restricted space
- 2,5", 4" or 6" aperture
- Lengths are nominal
- Opal Flush Lens
- Emergency back-up options available

SLEDI	6					P	W	DU		
FIXTURE	WIDTH	MOUNTING	LIGHT LEVEL	LED	LENGTH	OPTIC	COLOR	DRIVER	OPTIONS	ORDERING PART NUMBER
SLEDI SLOTLIGHT LED II Individual Recessed	6'6"	IW Lay-in, 15/16" Tee	04 450 lm/ft	835 80 CRI, 3500 K	04 4'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025477
									EL Standby Battery Pack, Left Side	11025479
					08 8'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025504
									EL Standby Battery Pack, Left Side	11025505
					12 12'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025492
									EL Standby Battery Pack, Left Side	11025493
			07 750 lm/ft	835 80 CRI, 3500 K	04 4'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025481
									EL Standby Battery Pack, Left Side	11025482
					08 8'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025506
									EL Standby Battery Pack, Left Side	11025507
					12 12'	P Flush Opal	W White	DU 0-10V Dimming Driver 120/277V	-	11025494
									EL Standby Battery Pack, Left Side	11025495

* Lay-In fixtures compatible with Armstrong TechZone and USG Logix Ceilings



BASYS LED II

- All options come with Dimming Driver, Clear Semi-Specular Reflector, and Natural or White Flange.
- Designed and built for maximum visual comfort, performance, and efficacy.
- Shallow 5" housing is perfect for applications with restricted plenum space.
- No visible LED "dots".
- Optimized thermal management, and built-in heat sink.
- CCT = 2700K, CRI = 85 typical.
- FIF 1120

**4" Round
14W
2700K Downlight**

BASYS LED II Housing

BR4DLED2N	14W	827	M5			
HOUSING	WATTAGE	LED MODULE	DISTRIBUTION	DRIVER	OPTIONS	ORDERING PART NUMBER
BR4DLED2N BASYS LED II Round 4" Recessed Downlight Standard Flange	14W 1000 lm	827 2700K 85 CRI typical	M5 Medium Distribution, 55° cutoff	D1 Standard 0-10V Dimming Driver, 10%, 120V	—	11025101
					EM1 Standby Battery Pack, 5W, 290 lm, 120V	11025103
				D2 Standard 0-10V Dimming Driver, 10%, 277V	—	11025102
					EM2 Standby Battery Pack, 5W, 290 lm, 277V	11025104


BASYS LED II Trim

BR4DLED2N	M5	CS		SL	
TRIM	CUTOFF	TRIM FINISH	FLANGE	LENS	ORDERING PART NUMBER
BR4DLED2N BASYS LED II Round 4" Recessed Downlight Standard Flange	M5 Medium Distribution, 55° cutoff	CS Clear Semi-Specular	N Natural	SL Solite	11025196
			W White	SL Solite	11025198


BASYS LED II Mounting

9930	9930
MOUNTING DESCRIPTION	ORDERING PART NUMBER
9930 Set of two 27" C-Channel mounting bars	9930

Photometry

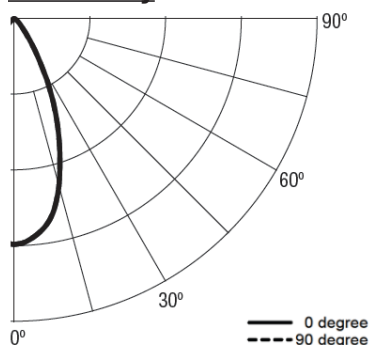

Fixture Dimensions

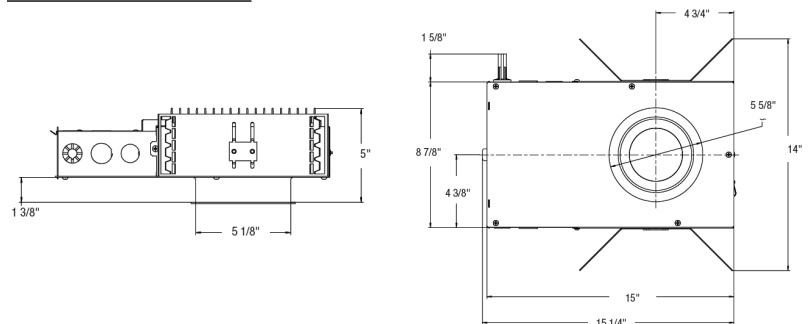



BASYS LED II

- All options come with Dimming Driver, Clear Semi-Specular Reflector, and Natural or White Flange.
- Designed and built for maximum visual comfort, performance, and efficacy.
- Shallow 5" housing is perfect for applications with restricted plenum space.
- No visible LED "dots".
- Optimized thermal management, and built-in heat sink.
- CCT = 2700K, CRI = 85 typical.
- FIF 1121

4" Round

14W

2700K Wallwasher

BASYS LED II Housing

BR4WLED2N	14W	827	-	-	-	
HOUSING	WATTAGE	LED MODULE	DISTRIBUTION	DRIVER	OPTIONS	ORDERING PART NUMBER
BR4WLED2N BASYS LED II Round 4" Recessed Wallwasher Standard Flange	14W 700 lm	827 2700K 85 CRI typical	-	D1 Standard 0-10V Dimming Driver, 10%, 120V	-	11025105
				D2 Standard 0-10V Dimming Driver, 10%, 277V	-	11025106


BASYS LED II Trim

BR4WLED2N	-	CS		
TRIM	CUTOFF	TRIM FINISH	FLANGE	ORDERING PART NUMBER
BR4WLED2N BASYS LED II Round 4" Recessed Wallwasher Standard Flange	-	CS Clear Semi-Specular	N Natural	11025200
			W White	11025201


BASYS LED II Mounting

9930	9930
MOUNTING DESCRIPTION	ORDERING PART NUMBER
9930 Set of two 27" C-Channel mounting bars	9930

Photometry

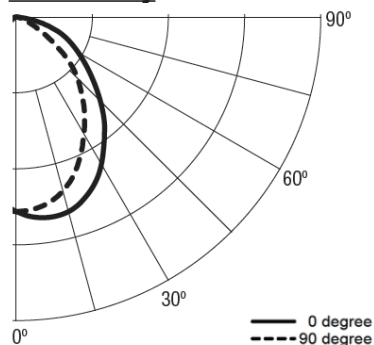

Fixture Dimensions

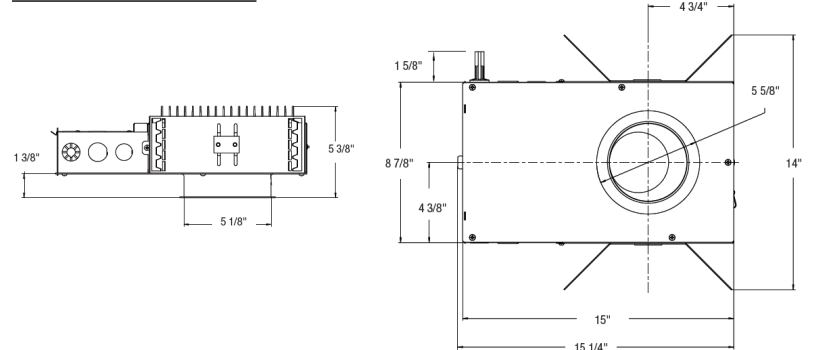



BASYS LED II

- All options come with Dimming Driver, Clear Semi-Specular Reflector, and Natural or White Flange.
- Designed and built for maximum visual comfort, performance, and efficacy.
- Shallow 5" housing is perfect for applications with restricted plenum space.
- No visible LED "dots".
- Optimized thermal management, and built-in heat sink.
- CCT = 3000K, CRI = 85 typical.
- FIF 1120

4" Round
14W and 22W
3000K Downlight

BASYS LED II Housing

BR4DLED2N		830	M5			
HOUSING	WATTAGE	LED MODULE	DISTRIBUTION	DRIVER	OPTIONS	ORDERING PART NUMBER
BR4DLED2N BASYS LED II Round 4" Recessed Downlight Standard Flange	14W 1000 lm	830 3000K 85 CRI typical	M5 Medium Distribution, 55° cutoff	D1 Standard 0-10V Dimming Driver, 10%, 120V	—	11025113
					EM1 Standby Battery Pack, 5W, 290 lm, 120V	11025115
				D2 Standard 0-10V Dimming Driver, 10%, 277V	—	11025114
					EM2 Standby Battery Pack, 5W, 290 lm, 277V	11025116
	22W 1400 lm	830 3000K 85 CRI typical	M5 Medium Distribution, 55° cutoff	D1 Standard 0-10V Dimming Driver, 10%, 120V	—	11025184
					EM1 Standby Battery Pack, 5W, 290 lm, 120V	11025186
				D2 Standard 0-10V Dimming Driver, 10%, 277V	—	11025185
					EM2 Standby Battery Pack, 5W, 290 lm, 277V	11025187


BASYS LED II Trim

BR4DLED2N	M5	CS		SL	
TRIM	CUTOFF	TRIM FINISH	FLANGE	LENS	ORDERING PART NUMBER
BR4DLED2N BASYS LED II Round 4" Recessed Downlight Standard Flange	M5 Medium Distribution, 55° cutoff	CS Clear Semi-Specular	N Natural	SL Solite	11025196
			W White	SL Solite	11025198


BASYS LED II Mounting

9930	9930
MOUNTING DESCRIPTION	ORDERING PART NUMBER
9930 Set of two 27" C-Channel mounting bars	9930

Photometry

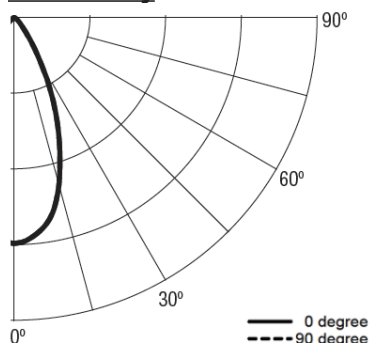

Fixture Dimensions

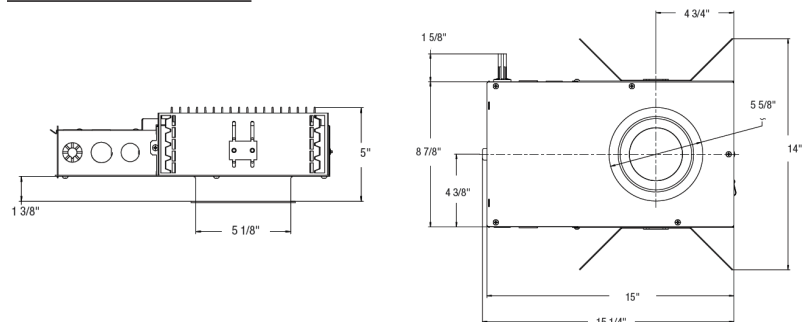



BASYS LED II

- All options come with Dimming Driver, Clear Semi-Specular Reflector, and Natural or White Flange.
- Designed and built for maximum visual comfort, performance, and efficacy.
- Shallow 5" housing is perfect for applications with restricted plenum space.
- No visible LED "dots".
- Optimized thermal management, and built-in heat sink.
- CCT = 3000K, CRI = 85 typical.
- FIF 1121

4" Round
14W and 22W
3000K Wallwasher

BASYS LED II Housing

BR4WLED2N		830	-		-	
HOUSING	WATTAGE	LED MODULE	DISTRIBUTION	DRIVER	OPTIONS	ORDERING PART NUMBER
BR4WLED2N BASYS LED II Round 4" Recessed Wallwasher Standard Flange	14W 700 lm	830 3000K 85 CRI typical	-	D1 Standard 0-10V Dimming Driver, 10%, 120V	-	11025179
				D2 Standard 0-10V Dimming Driver, 10%, 277V	-	11025180
	22W 980 lm	830 3000K 85 CRI typical	-	D1 Standard 0-10V Dimming Driver, 10%, 120V	-	11025188
				D2 Standard 0-10V Dimming Driver, 10%, 277V	-	11025190


BASYS LED II Trim

BR4WLED2N	-	CS		
TRIM	CUTOFF	TRIM FINISH	FLANGE	ORDERING PART NUMBER
BR4WLED2N BASYS LED II Round 4" Recessed Wallwasher Standard Flange	-	CS Clear Semi-Specular	N Natural	11025200
			W White	11025201

BASYS LED II Mounting


9930	9930
MOUNTING DESCRIPTION	ORDERING PART NUMBER
9930 Set of two 27" C-Channel mounting bars	9930

Photometry

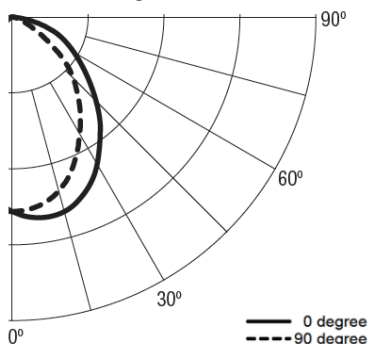

rev. 12/1/14

Fixture Dimensions

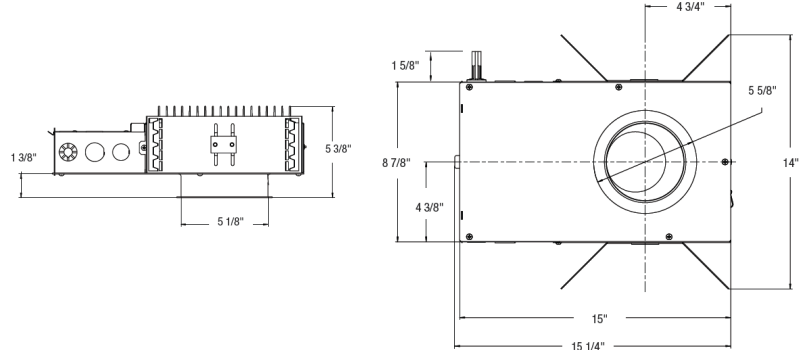

www.zumtobel.us



BASYS LED II

- All options come with Dimming Driver, Clear Semi-Specular Reflector, and Natural or White Flange.
- Designed and built for maximum visual comfort, performance, and efficacy.
- Shallow 5" housing is perfect for applications with restricted plenum space.
- No visible LED "dots".
- Optimized thermal management, and built-in heat sink.
- CCT = 3500K, CRI = 85 typical.
- FIF 1120

4" Round
14W and 22W
3500K Downlight

BASYS LED II Housing


BR4DLED2N		835	M5			
HOUSING	WATTAGE	LED MODULE	DISTRIBUTION	DRIVER	OPTIONS	ORDERING PART NUMBER
BR4DLED2N BASYS LED II Round 4" Recessed Downlight Standard Flange	14W 1000 lm	835 3500K 85 CRI typical	M5 Medium Distribution, 55° cutoff	D1 Standard 0-10V Dimming Driver, 10%, 120V	—	11023828
					EM1 Standby Battery Pack, 5W, 290 lm, 120V	11023812
				D2 Standard 0-10V Dimming Driver, 10%, 277V	—	11025181
					EM2 Standby Battery Pack, 5W, 290 lm, 277V	11025182
	22W 1400 lm	835 3500K 85 CRI typical	M5 Medium Distribution, 55° cutoff	D1 Standard 0-10V Dimming Driver, 10%, 120V	—	11023827
					EM1 Standby Battery Pack, 5W, 290 lm, 120V	11025192
				D2 Standard 0-10V Dimming Driver, 10%, 277V	—	11025191
					EM2 Standby Battery Pack, 5W, 290 lm, 277V	11025193

BASYS LED II Trim


BR4DLED2N	M5	CS		SL		9930	9930
TRIM	CUTOFF	TRIM FINISH	FLANGE	LENS	ORDERING PART NUMBER	MOUNTING DESCRIPTION	ORDERING PART NUMBER
BR4DLED2N BASYS LED II Round 4" Recessed Downlight Standard Flange	M5 Medium Distribution, 55° cutoff	CS Clear Semi- Specular	N Natural	SL Solite	11025196	9930 Set of two 27" C-Channel mounting bars	9930
			W White	SL Solite	11025198		

BASYS LED II Mounting

Photometry

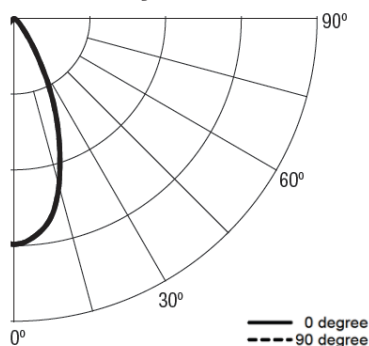

Fixture Dimensions

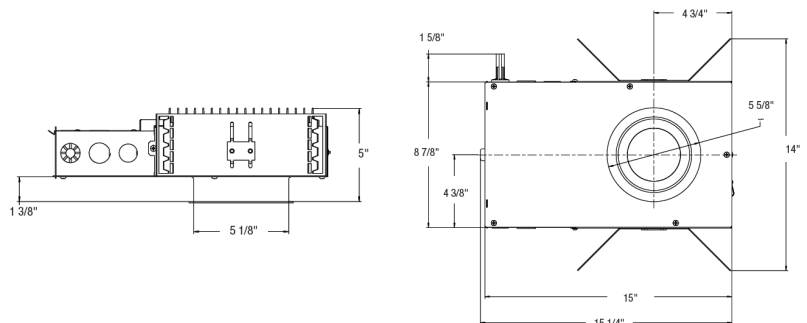



BASYS LED II

- All options come with Dimming Driver, Clear Semi-Specular Reflector, and Natural or White Flange.
- Designed and built for maximum visual comfort, performance, and efficacy.
- Shallow 5" housing is perfect for applications with restricted plenum space.
- No visible LED "dots".
- Optimized thermal management, and built-in heat sink.
- CCT = 3500K, CRI = 85 typical.
- FIF 1121

4" Round
14W and 22W
3500K Wallwasher

BASYS LED II Housing

BR4WLED2N		835	-		-	
HOUSING	WATTAGE	LED MODULE	DISTRIBUTION	DRIVER	OPTIONS	ORDERING PART NUMBER
BR4WLED2N BASYS LED II Round 4" Recessed Wallwasher Standard Flange	14W 700 lm	835 3500K 85 CRI typical	-	D1 Standard 0-10V Dimming Driver, 10%, 120V	-	11018291
				D2 Standard 0-10V Dimming Driver, 10%, 277V	-	11025183
	22W 980 lm	835 3500K 85 CRI typical	-	D1 Standard 0-10V Dimming Driver, 10%, 120V	-	11025194
				D2 Standard 0-10V Dimming Driver, 10%, 277V	-	11025195


BASYS LED II Trim

BR4WLED2N	-	CS		
TRIM	CUTOFF	TRIM FINISH	FLANGE	ORDERING PART NUMBER
BR4WLED2N BASYS LED II Round 4" Recessed Wallwasher Standard Flange	-	CS Clear Semi-Specular	N Natural	11025200
			W White	11025201

BASYS LED II Mounting


9930	9930
MOUNTING DESCRIPTION	ORDERING PART NUMBER
9930 Set of two 27" C-Channel mounting bars	9930

Photometry

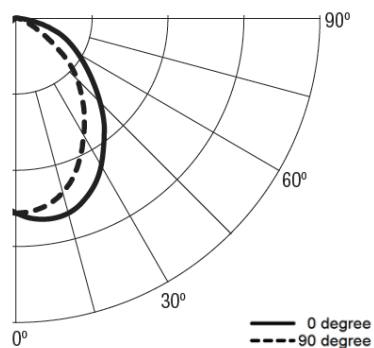

rev. 12/1/14

Fixture Dimensions

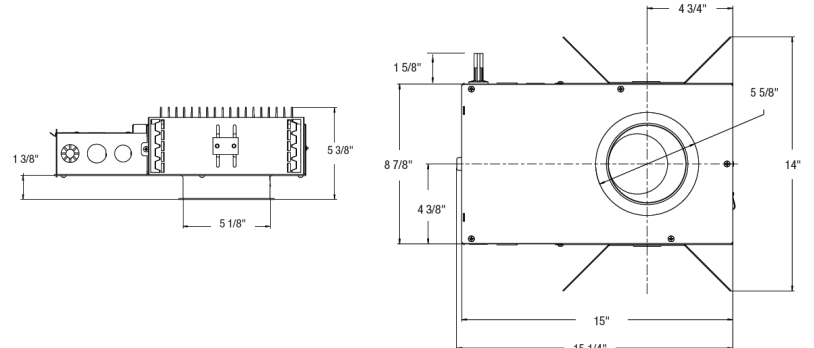



BASYS LED II

- All options come with Dimming Driver, Clear Semi-Specular Reflector, and Natural or White Flange.
- Designed and built for maximum visual comfort, performance, and efficacy.
- Shallow 5" housing is perfect for applications with restricted plenum space.
- No visible LED "dots".
- Optimized thermal management, and built-in heat sink.
- CCT = 2700K, CRI = 85 typical.
- FIF 1122

**4" Square
14W
2700K Downlight**

BASYS LED II Housing

BS4DLED2N	14W	827	M5			
HOUSING	WATTAGE	LED MODULE	DISTRIBUTION	DRIVER	OPTIONS	ORDERING PART NUMBER
BS4DLED2N BASYS LED II Square 4" Recessed Downlight Standard Flange	14W 1000 lm	827 2700K 85 CRI typical	M5 Medium Distribution, 55° cutoff	D1 Standard 0-10V Dimming Driver, 10%, 120V	—	11025107
				D2 Standard 0-10V Dimming Driver, 10%, 277V	EM1 Standby Battery Pack, 5W, 290 lm, 120V	11025109
						11025108
					EM2 Standby Battery Pack, 5W, 290 lm, 277V	11025110


BASYS LED II Trim

BS4DLED2N	M5	CS		SL	
TRIM	CUTOFF	TRIM FINISH	FLANGE	LENS	ORDERING PART NUMBER
BS4DLED2N BASYS LED II Square 4" Recessed Downlight Standard Flange	M5 Medium Distribution, 55° cutoff	CS Clear Semi-Specular	N Natural	SL Solite	11025223
			W White	SL Solite	11025225

BASYS LED II Mounting


9930	9930
MOUNTING DESCRIPTION	ORDERING PART NUMBER
9930 Set of two 27" C-Channel mounting bars	9930

Photometry

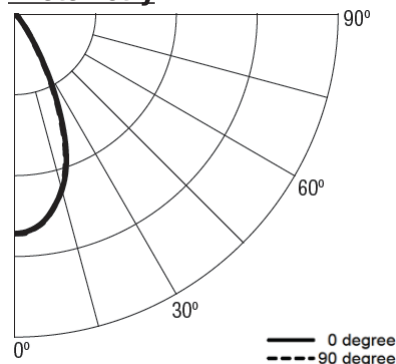

rev. 12/1/14

Fixture Dimensions

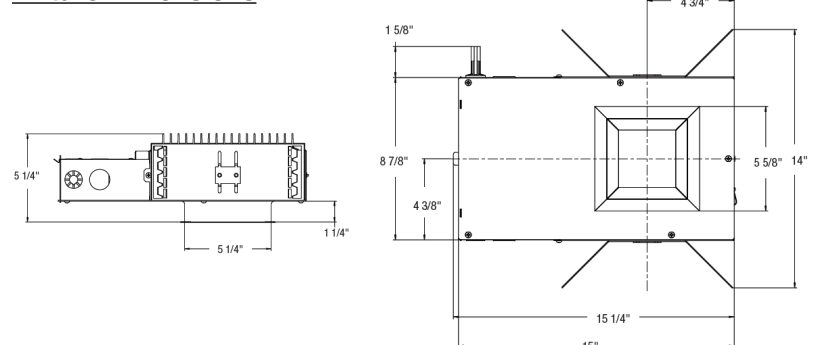



BASYS LED II

- All options come with Dimming Driver, Clear Semi-Specular Reflector, and Natural or White Flange.
- Designed and built for maximum visual comfort, performance, and efficacy.
- Shallow 5" housing is perfect for applications with restricted plenum space.
- No visible LED "dots".
- Optimized thermal management, and built-in heat sink.
- CCT = 2700K, CRI = 85 typical.
- FIF 1123

4" Square

14W

2700K Wallwasher

BASYS LED II Housing

BS4WLED2N	14W	827	-	-	-	
HOUSING	WATTAGE	LED MODULE	DISTRIBUTION	DRIVER	OPTIONS	ORDERING PART NUMBER
BS4WLED2N BASYS LED II Square 4" Recessed Wallwasher Standard Flange	14W 700 lm	827 2700K 85 CRI typical	-	D1 Standard 0-10V Dimming Driver, 10%, 120V	-	11025111
				D2 Standard 0-10V Dimming Driver, 10%, 277V	-	11025112


BASYS LED II Trim

BS4WLED2N	-	CS		
TRIM	CUTOFF	TRIM FINISH	FLANGE	ORDERING PART NUMBER
BS4WLED2N BASYS LED II Square 4" Recessed Wallwasher Standard Flange	-	CS Clear Semi-Specular	N Natural	11025227
			W White	11025228

BASYS LED II Mounting


9930	9930
MOUNTING DESCRIPTION	ORDERING PART NUMBER
9930 Set of two 27" C-Channel mounting bars	9930

Photometry

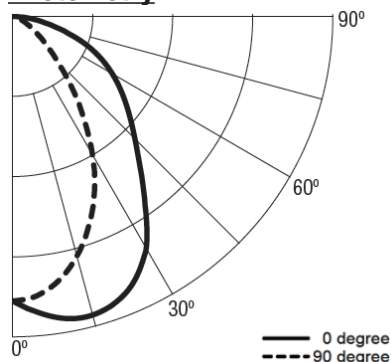

rev. 12/1/14

Fixture Dimensions

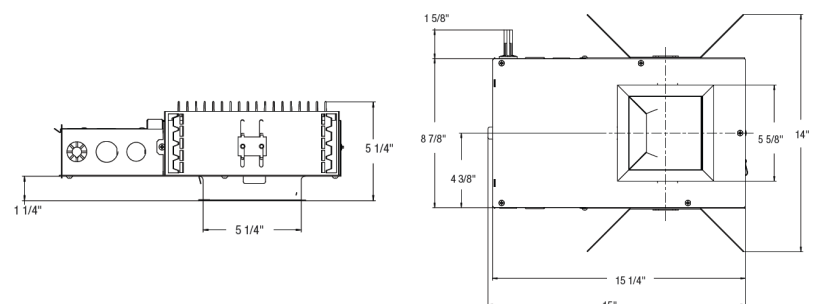



BASYS LED II

- All options come with Dimming Driver, Clear Semi-Specular Reflector, and Natural Flange.
- Designed and built for maximum visual comfort, performance, and efficacy.
- Shallow 5" housing is perfect for applications with restricted plenum space.
- No visible LED "dots".
- Optimized thermal management, and built-in heat sink.
- CCT = 3000K, CRI = 85 typical.
- FIF 1122

4" Square
14W and 22W
3000K Downlight

BASYS LED II Housing

BS4DLED2N		830	M5			
HOUSING	WATTAGE	LED MODULE	DISTRIBUTION	DRIVER	OPTIONS	ORDERING PART NUMBER
BS4DLED2N BASYS LED II Square 4" Recessed Downlight Standard Flange	14W 1000 lm	830 3000K 85 CRI typical	M5 Medium Distribution, 55° cutoff	D1 Standard 0-10V Dimming Driver, 10%, 120V	—	11025202
					EM1 Standby Battery Pack, 5W, 290 lm, 120V	11025204
				D2 Standard 0-10V Dimming Driver, 10%, 277V	—	11025203
					EM2 Standby Battery Pack, 5W, 290 lm, 277V	11025205
	22W 1400 lm	830 3000K 85 CRI typical	M5 Medium Distribution, 55° cutoff	D1 Standard 0-10V Dimming Driver, 10%, 120V	—	11025211
					EM1 Standby Battery Pack, 5W, 290 lm, 120V	11025213
				D2 Standard 0-10V Dimming Driver, 10%, 277V	—	11025212
					EM2 Standby Battery Pack, 5W, 290 lm, 277V	11025214


BASYS LED II Trim

BS4DLED2N	M5	CS		SL	
TRIM	CUTOFF	TRIM FINISH	FLANGE	LENS	ORDERING PART NUMBER
BS4DLED2N BASYS LED II Square 4" Recessed Downlight Standard Flange	M5 Medium Distribution, 55° cutoff	CS Clear Semi-Specular	N Natural	SL Solite	11025223
			W White	SL Solite	11025225

BASYS LED II Mounting


9930	9930
MOUNTING DESCRIPTION	ORDERING PART NUMBER
9930 Set of two 27" C-Channel mounting bars	9930

Photometry

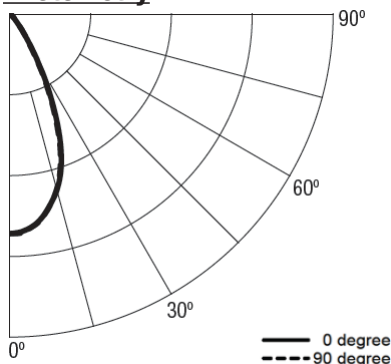

rev. 12/1/14

Fixture Dimensions

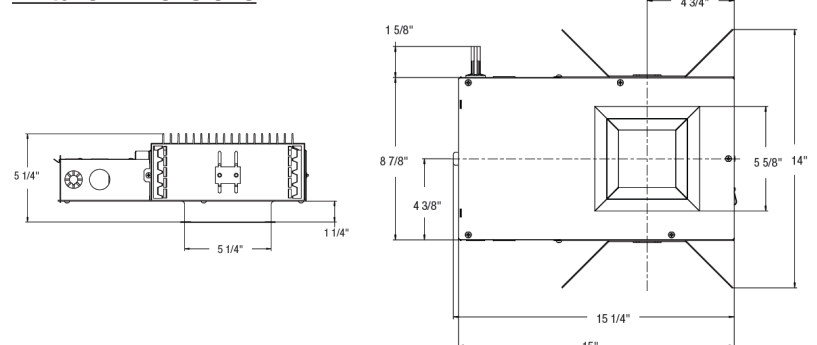



BASYS LED II

- All options come with Dimming Driver, Clear Semi-Specular Reflector, and Natural or White Flange.
- Designed and built for maximum visual comfort, performance, and efficacy.
- Shallow 5" housing is perfect for applications with restricted plenum space.
- No visible LED "dots".
- Optimized thermal management, and built-in heat sink.
- CCT = 3000K, CRI = 85 typical.
- FIF 1123

4" Square
14W and 22W
3000K Wallwasher

BASYS LED II Housing

BS4WLED2N		830	-		-	
HOUSING	WATTAGE	LED MODULE	DISTRIBUTION	DRIVER	OPTIONS	ORDERING PART NUMBER
BS4WLED2N BASYS LED II Square 4" Recessed Wallwasher Standard Flange	14W 700 lm	830 3000K 85 CRI typical	-	D1 Standard 0-10V Dimming Driver, 10%, 120V	-	11025206
				D2 Standard 0-10V Dimming Driver, 10%, 277V	-	11025207
	22W 980 lm	830 3000K 85 CRI typical	-	D1 Standard 0-10V Dimming Driver, 10%, 120V	-	11025215
				D2 Standard 0-10V Dimming Driver, 10%, 277V	-	11025216


BASYS LED II Trim

BS4WLED2N	-	CS		
TRIM	CUTOFF	TRIM FINISH	FLANGE	ORDERING PART NUMBER
BS4WLED2N BASYS LED II Square 4" Recessed Wallwasher Standard Flange	-	CS Clear Semi-Specular	N Natural	11025227
			W White	11025228

BASYS LED II Mounting


9930	9930
MOUNTING DESCRIPTION	ORDERING PART NUMBER
9930 Set of two 27" C-Channel mounting bars	9930

Photometry

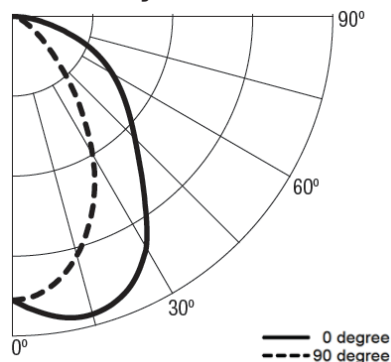

rev. 12/1/14

Fixture Dimensions

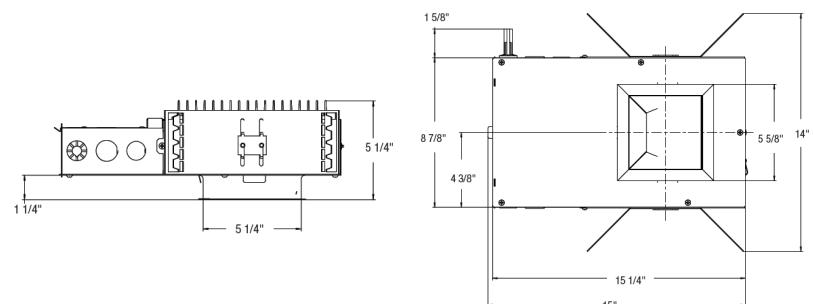



BASYS LED II

- All options come with Dimming Driver, Clear Semi-Specular Reflector, and Natural or White Flange.
- Designed and built for maximum visual comfort, performance, and efficacy.
- Shallow 5" housing is perfect for applications with restricted plenum space.
- No visible LED "dots".
- Optimized thermal management, and built-in heat sink.
- CCT = 3500K, CRI = 85 typical.
- FIF 1122

4" Square
14W and 22W
3500K Downlight

BASYS LED II Housing

BS4DLED2N		835	M5			
HOUSING	WATTAGE	LED MODULE	DISTRIBUTION	DRIVER	OPTIONS	ORDERING PART NUMBER
BS4DLED2N BASYS LED II Square 4" Recessed Downlight Standard Flange	14W 1000 lm	835 3500K 85 CRI typical	M5 Medium Distribution, 55° cutoff	D1 Standard 0-10V Dimming Driver, 10%, 120V	—	11018284
					EM1 Standby Battery Pack, 5W, 290 lm, 120V	11023969
				D2 Standard 0-10V Dimming Driver, 10%, 277V	—	11025208
					EM2 Standby Battery Pack, 5W, 290 lm, 277V	11025209
	22W 1400 lm	835 3500K 85 CRI typical	M5 Medium Distribution, 55° cutoff	D1 Standard 0-10V Dimming Driver, 10%, 120V	—	11025217
					EM1 Standby Battery Pack, 5W, 290 lm, 120V	11025219
				D2 Standard 0-10V Dimming Driver, 10%, 277V	—	11025218
					EM2 Standby Battery Pack, 5W, 290 lm, 277V	11025220


BASYS LED II Trim

BS4DLED2N	M5	CS		SL	
TRIM	CUTOFF	TRIM FINISH	FLANGE	LENS	ORDERING PART NUMBER
BS4DLED2N BASYS LED II Square 4" Recessed Downlight Standard Flange	M5 Medium Distribution, 55° cutoff	CS Clear Semi-Specular	N Natural	SL Solite	11025223
			W White	SL Solite	11025225

BASYS LED II Mounting


9930	9930
MOUNTING DESCRIPTION	ORDERING PART NUMBER
9930 Set of two 27" C-Channel mounting bars	9930

Photometry

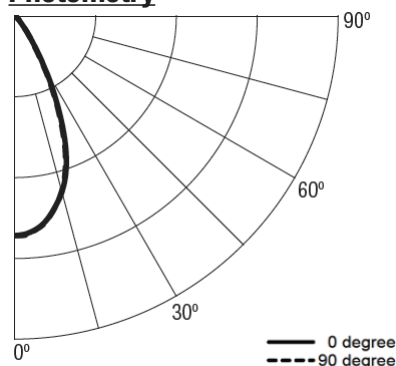

rev. 12/1/14

Fixture Dimensions

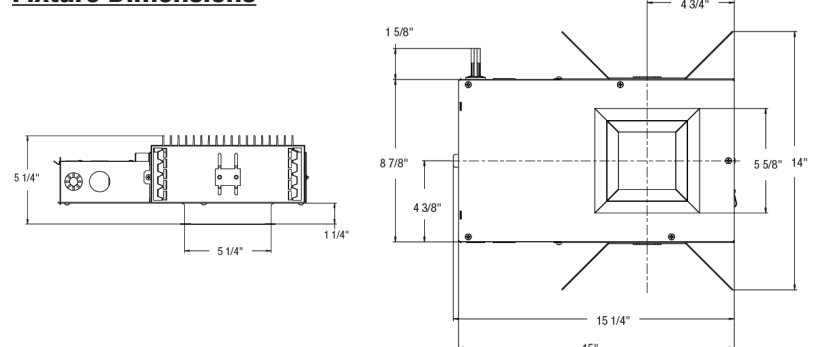



BASYS LED II

- All options come with Dimming Driver, Clear Semi-Specular Reflector, and Natural or White Flange.
- Designed and built for maximum visual comfort, performance, and efficacy.
- Shallow 5" housing is perfect for applications with restricted plenum space.
- No visible LED "dots".
- Optimized thermal management, and built-in heat sink.
- CCT = 3500K, CRI = 85 typical.
- FIF 1123

4" Square
14W and 22W
3500K Wallwasher

BASYS LED II Housing

BS4WLED2N		835	-		-	
HOUSING	WATTAGE	LED MODULE	DISTRIBUTION	DRIVER	OPTIONS	ORDERING PART NUMBER
BS4WLED2N BASYS LED II Square 4" Recessed Wallwasher Standard Flange	14W 700 lm	835 3500K 85 CRI typical	-	D1 Standard 0-10V Dimming Driver, 10%, 120V	-	11018288
				D2 Standard 0-10V Dimming Driver, 10%, 277V	-	11025210
	22W 980 lm	835 3500K 85 CRI typical	-	D1 Standard 0-10V Dimming Driver, 10%, 120V	-	11025221
				D2 Standard 0-10V Dimming Driver, 10%, 277V	-	11025222


BASYS LED II Trim

BS4WLED2N	-	CS		
TRIM	CUTOFF	TRIM FINISH	FLANGE	ORDERING PART NUMBER
BS4WLED2N BASYS LED II Square 4" Recessed Wallwasher Standard Flange	-	CS Clear Semi-Specular	N Natural	11025227
			W White	11025228

BASYS LED II Mounting


9930	9930
MOUNTING DESCRIPTION	ORDERING PART NUMBER
9930 Set of two 27" C-Channel mounting bars	9930

Photometry

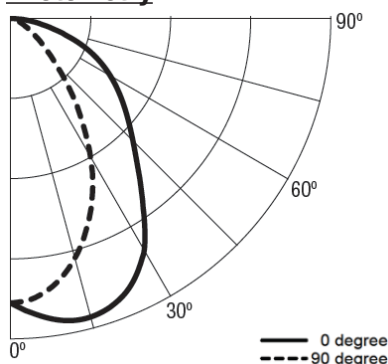

rev. 12/1/14

Fixture Dimensions

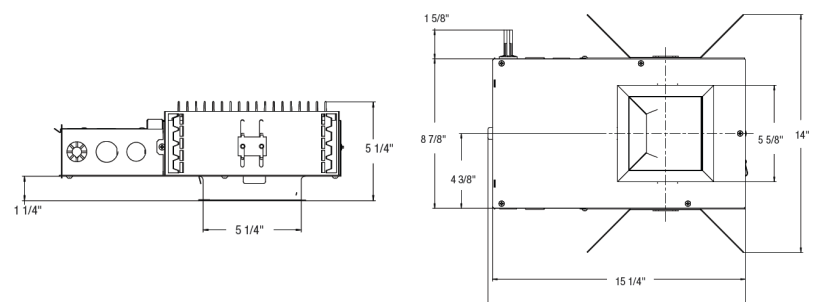



BASYS LED II

- All options come with Dimming Driver, Clear Semi-Specular Reflector, and Natural or White Flange.
- Designed and built for maximum visual comfort, performance, and efficacy.
- Shallow housing is perfect for applications with restricted plenum space.
- No visible LED "dots".
- Optimized thermal management, and built-in heat sink.
- CCT = 3500K, CRI = 85 typical.
- FIF 1124

6" Round
18W

3500K Downlight

BASYS LED II Housing

BR6DLED2N	18W	835				
HOUSING	WATTAGE	LED MODULE	DISTRIBUTION	DRIVER	OPTIONS	ORDERING PART NUMBER
BR6DLED2N BASYS LED II Round 6" Recessed Downlight Standard Flange	18W 1400 lm	835 3500K 85 CRI typical	M5 Medium Distribution, 55° cutoff	D1 Standard 0-10V Dimming Driver, 10%, 120V	—	11025229
					EM1 Standby Battery Pack, 5W, 290 lm, 120V	11025231
				D2 Standard 0-10V Dimming Driver, 10%, 277V	—	11025230
					EM2 Standby Battery Pack, 5W, 290 lm, 277V	11025232


BASYS LED II Trim

BR6DLED2N	M5	CS		SL	
TRIM	CUTOFF	TRIM FINISH	FLANGE	LENS	ORDERING PART NUMBER
BR6DLED2N BASYS LED II Round 6" Recessed Downlight Standard Flange	M5 Medium Distribution, 55° cutoff	CS Clear Semi-Specular	N Natural	SL Solite	11025235
			W White	SL Solite	11025508

BASYS LED II Mounting


9930	9930
MOUNTING DESCRIPTION	ORDERING PART NUMBER
9930 Set of two 27" C-Channel mounting bars	9930

Photometry

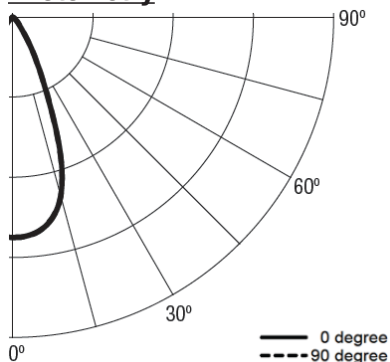

rev. 12/1/14

Fixture Dimensions

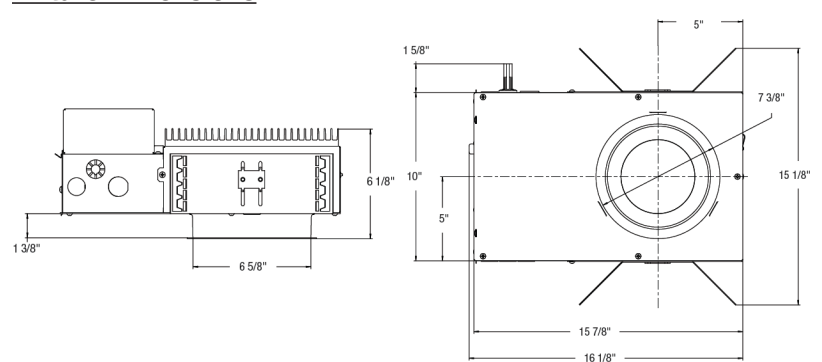



BASYS LED II

- All options come with Dimming Driver, Clear Semi-Specular Reflector, and Natural Flange.
- Designed and built for maximum visual comfort, performance, and efficacy.
- Shallow housing is perfect for applications with restricted plenum space.
- No visible LED "dots".
- Optimized thermal management, and built-in heat sink.
- CCT = 3500K, CRI = 85 typical.
- Wallwasher FIF 1125

6" Round
18W
3500K Wallwasher

BASYS LED II Housing

BR6WLED2N	18W	835	-	-	-	
HOUSING	WATTAGE	LED MODULE	DISTRIBUTION	DRIVER	OPTIONS	ORDERING PART NUMBER
BR6WLED2N BASYS LED II Round 6" Recessed Wallwasher Standard Flange	18W 980 lm	835 3500K 85 CRI typical	-	D1 Standard 0-10V Dimming Driver, 10%, 120V	-	11025233
			-	D2 Standard 0-10V Dimming Driver, 10%, 277V	-	11025234


BASYS LED II Trim

BR6WLED2N	-	CS		
TRIM	CUTOFF	TRIM FINISH	FLANGE	ORDERING PART NUMBER
BR6WLED2N BASYS LED II Round 6" Recessed Wallwasher Standard Flange	-	CS Clear Semi-Specular	N Natural	11025237
			W White	11025510

BASYS LED II Mounting


9930	9930
MOUNTING DESCRIPTION	ORDERING PART NUMBER
9930 Set of two 27" C-Channel mounting bars	9930

Photometry

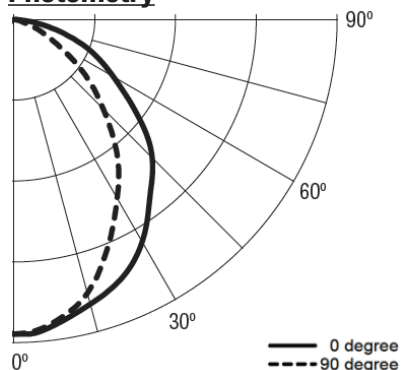

rev. 12/1/14

Fixture Dimensions

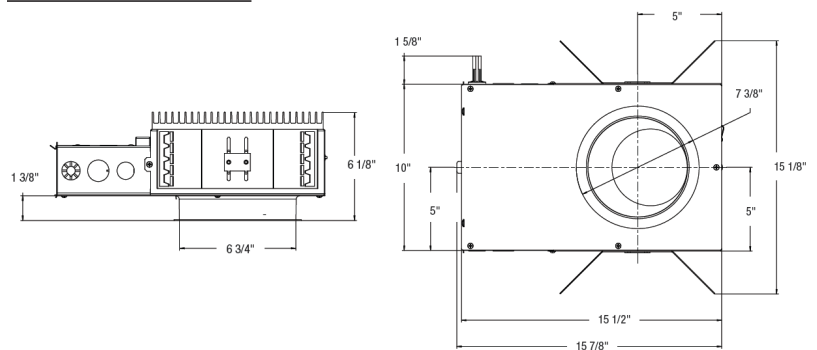



BASYS LED II

- All options come with Dimming Driver, Clear Semi-Specular Reflector and Natural or White Flange.
- Designed and built for maximum visual comfort, performance, and efficacy.
- Shallow housing is perfect for applications with restricted plenum space.
- No visible LED "dots".
- Optimized thermal management, and built-in heat sink.
- CCT = 3500K, CRI = 85 typical.
- FIF 1126

**6" Square
18W
3500K Downlight**

BASYS LED II Housing

BS6DLED2N	18W	835	M5			
HOUSING	WATTAGE	LED MODULE	DISTRIBUTION	DRIVER	OPTIONS	ORDERING PART NUMBER
BS6DLED2N BASYS LED II Square 6" Recessed Downlight Standard Flange	18W 1400 lm	835 3500K 85 CRI typical	M5 Medium Distribution, 55° cutoff	D1 Standard 0-10V Dimming Driver, 10%, 120V	—	11025238
					EM1 Standby Battery Pack, 5W, 290 lm, 120V	11025240
				D2 Standard 0-10V Dimming Driver, 10%, 277V	—	11025239
					EM2 Standby Battery Pack, 5W, 290 lm, 277V	11025813


BASYS LED II Trim

BS6DLED2N	M5	CS		SL	
TRIM	CUTOFF	TRIM FINISH	FLANGE	LENS	ORDERING PART NUMBER
BS6DLED2N BASYS LED II Square 6" Recessed Downlight Standard Flange	M5 Medium Distribution, 55° cutoff	CS Clear Semi-Specular	N Natural	SL Solite	11025248
			W White	SL Solite	11025511

BASYS LED II Mounting


9930	9930
MOUNTING DESCRIPTION	ORDERING PART NUMBER
9930 Set of two 27" C-Channel mounting bars	9930

Photometry

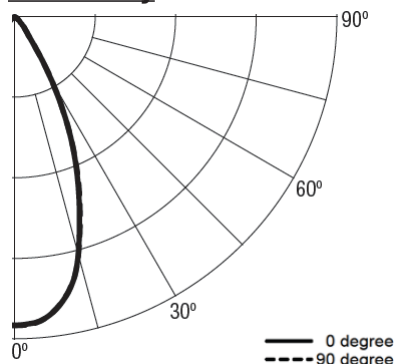

rev. 12/1/14

Fixture Dimensions

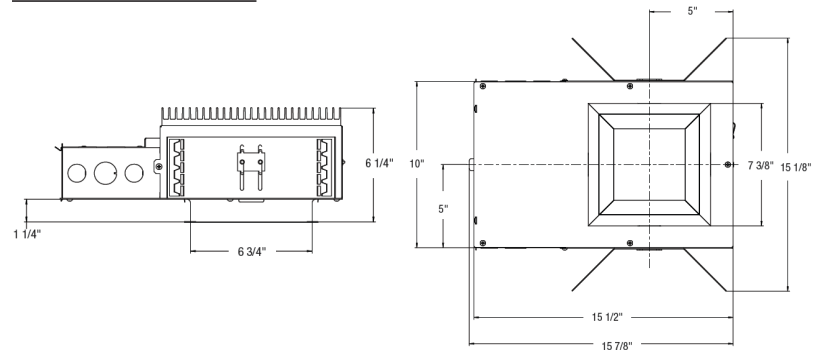



BASYS LED II

- All options come with Dimming Driver, Clear Semi-Specular Reflector and Natural or White Flange.
- Designed and built for maximum visual comfort, performance, and efficacy.
- Shallow housing is perfect for applications with restricted plenum space.
- No visible LED "dots".
- Optimized thermal management, and built-in heat sink.
- CCT = 3500K, CRI = 85 typical.
- FIF 1127

6" Square

18W

3500K Wallwasher

BASYS LED II Housing

BS6WLED2N	18W	835	-	-	-	
HOUSING	WATTAGE	LED MODULE	DISTRIBUTION	DRIVER	OPTIONS	ORDERING PART NUMBER
BS6WLED2N BASYS LED II Square 6" Recessed Wallwasher Standard Flange	18W 1000 lm	835 3500K 85 CRI typical	-	D1 Standard 0-10V Dimming Driver, 10%, 120V	-	11025242
			-	D2 Standard 0-10V Dimming Driver, 10%, 277V	-	11025243


BASYS LED II Trim

BS6WLED2N	-	CS		
TRIM	CUTOFF	TRIM FINISH	FLANGE	ORDERING PART NUMBER
BS6WLED2N BASYS LED II Square 6" Recessed Wallwasher Standard Flange	-	CS Clear Semi-Specular	N Natural	11025250
			W White	11025513

BASYS LED II Mounting


9930	9930
MOUNTING DESCRIPTION	ORDERING PART NUMBER
9930 Set of two 27" C-Channel mounting bars	9930

Photometry

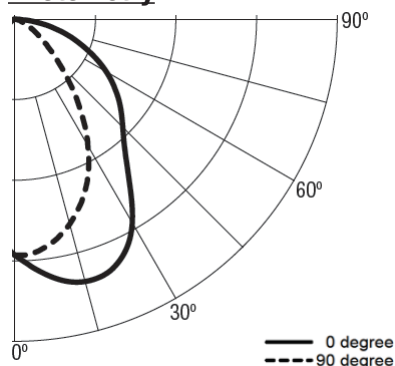

rev. 12/1/14

Fixture Dimensions

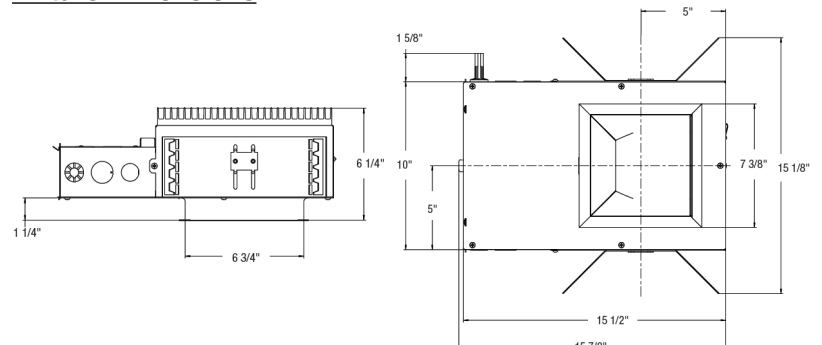



BASYS LED II

- All options come with Dimming Driver, Clear Semi-Specular Reflector, and Natural or White Flange.
- Designed and built for maximum visual comfort, performance, and efficacy.
- Shallow housing is perfect for applications with restricted plenum space.
- No visible LED "dots".
- Optimized thermal management, and built-in heat sink.
- CCT = 3500K, CRI = 85 typical.
- FIF 1124

6" Round

37W

3500K Downlight

BASYS LED II Housing

BR6DLED2N	37W	835	M5		-	
HOUSING	WATTAGE	LED MODULE	DISTRIBUTION	DRIVER	OPTIONS	ORDERING PART NUMBER
BR6DLED2N BASYS LED II Round 6" Recessed Downlight Standard Flange	37W 2800 lm	835 3500K 85 CRI typical	M5 Medium Distribution, 55° cutoff	D1 Standard 0-10V Dimming Driver, 10%, 120V	-	11025244
				D2 Standard 0-10V Dimming Driver, 10%, 277V	-	11025245


BASYS LED II Trim

BR6DLED2N	M5	CS		SL	
TRIM	CUTOFF	TRIM FINISH	FLANGE	LENS	ORDERING PART NUMBER
BR6DLED2N BASYS LED II Round 6" Recessed Downlight Standard Flange	M5 Medium Distribution, 55° cutoff	CS Clear Semi-Specular	N Natural	SL Solite	11025235
			W White	SL Solite	11025508


BASYS LED II Mounting

9930	9930
MOUNTING DESCRIPTION	ORDERING PART NUMBER
9930 Set of two 27" C-Channel mounting bars	9930

Photometry

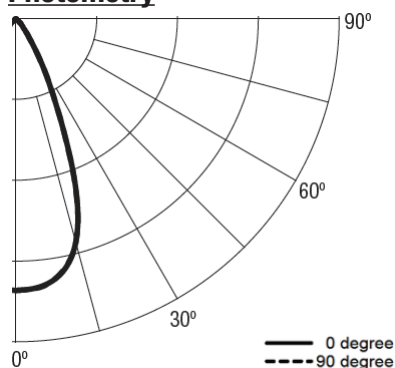

Fixture Dimensions

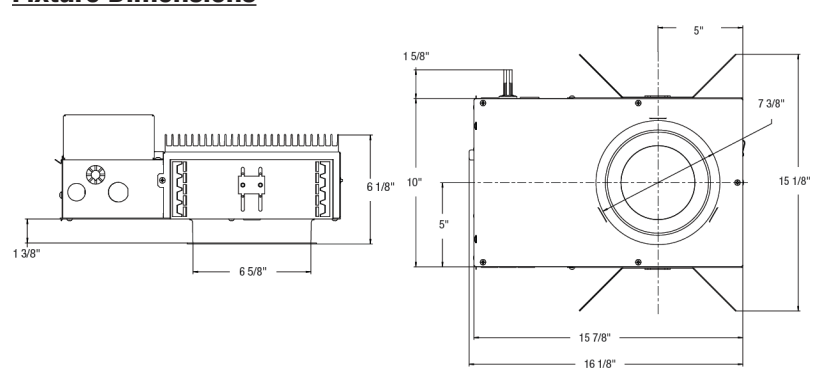



BASYS LED II

- All options come with Dimming Driver, Clear Semi-Specular Reflector, and Natural or White Flange.
- Designed and built for maximum visual comfort, performance, and efficacy.
- Shallow housing is perfect for applications with restricted plenum space.
- No visible LED "dots".
- Optimized thermal management, and built-in heat sink.
- CCT = 3500K, CRI = 85 typical.
- FIF 1126

6" Square
37W
3500K Downlight

BASYS LED II Housing

BS6DLED2N	37W	835	M5		-	
HOUSING	WATTAGE	LED MODULE	DISTRIBUTION	DRIVER	OPTIONS	ORDERING PART NUMBER
BS6DLED2N BASYS LED II Square 6" Recessed Downlight Standard Flange	37W 2800 lm	835 3500K 85 CRI typical	M5 Medium Distribution, 55° cutoff	D1 Standard 0-10V Dimming Driver, 10%, 120V	-	11025246
				D2 Standard 0-10V Dimming Driver, 10%, 277V	-	11025247


BASYS LED II Trim

BR6DLED2N	M5	CS		SL	
TRIM	CUTOFF	TRIM FINISH	FLANGE	LENS	ORDERING PART NUMBER
BS6DLED2N BASYS LED II Square 6" Recessed Downlight Standard Flange	M5 Medium Distribution, 55° cutoff	CS Clear Semi-Specular	N Natural	SL Solite	11025248
			W White	SL Solite	11025511

BASYS LED II Mounting


9930	9930
MOUNTING DESCRIPTION	ORDERING PART NUMBER
9930 Set of two 27" C-Channel mounting bars	9930

Photometry

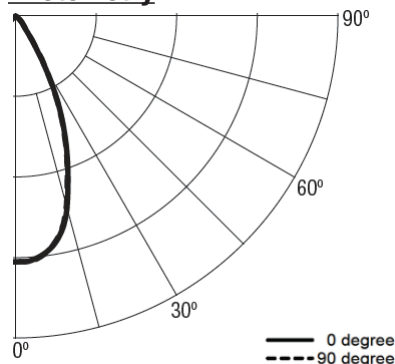

rev. 12/1/14

Fixture Dimensions

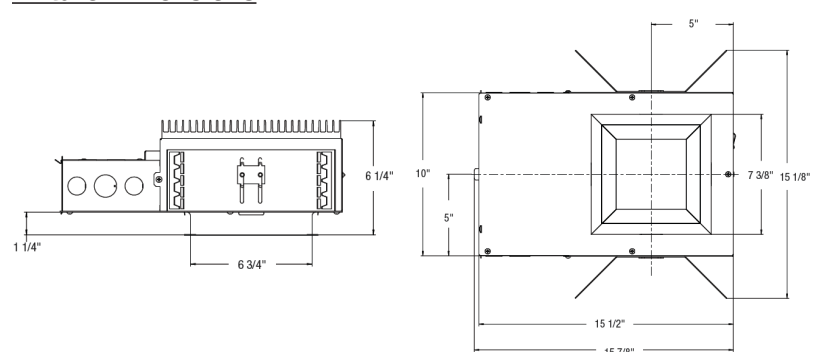



SPEC-5

- All options come with Matte Clear Trim and White Painted Flange.
- Offers excellent brightness control in a 6" aperture.
- Reflector is one piece spun aluminum with 1/2" flat flange with low iridescence.
- Provided with electronic ballast to power 26W, 32W, or 42W lamping.
- FIF 1045

6" Round CFL Downlight and Wallwasher UNV or 347V Ballast

SPEC-5 Housing

HOUSING	BALLAST/VOLTAGE	OPTIONS	ORDERING PART NUMBER
S5D6309 6" Vertical Compact Fluorescent Downlight - (1) 26W / 32W / 42W Triple Tube	UNV Universal 120/277V	-	05361622
		EM Standby Battery Pack	05361624
S5W6309 6" Vertical Compact Fluorescent Wallwasher - (1) 26W / 32W / 42W Triple Tube	UNV Universal 120/277V	-	05361622
S5D6309 6" Vertical Compact Fluorescent Downlight - (1) 26W / 32W / 42W Triple Tube	S3 347V	-	11001876
S5W6309 6" Vertical Compact Fluorescent Wallwasher - (1) 26W / 32W / 42W Triple Tube	S3 347V	-	11001876




SPEC-5 Trim

HOUSING	TRIM	MC TRIM FINISH	W FLANGE	OPTIONS	ORDERING PART NUMBER
S5D6309 6" Vertical Compact Fluorescent Downlight (1) 26W / 32W / 42W Triple Tube	6308R Downlight Reflector	MC Matte Clear	W White	-	6308RMCW
				EM Standby Battery Pack	6308RMCWE
S5W6309 6" Vertical Compact Fluorescent Wallwasher (1) 26W / 32W / 42W Triple Tube	6308W Wallwasher Reflector	MC Matte Clear	W White	-	6308WMCW

SPEC-5 Mounting

9930 MOUNTING DESCRIPTION	9930 ORDERING PART NUMBER
9930 Set of two 27" C-Channel mounting bars	9930

Fixture Dimensions

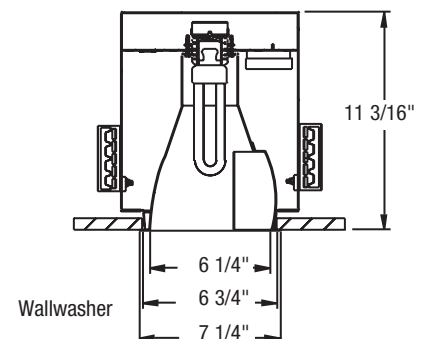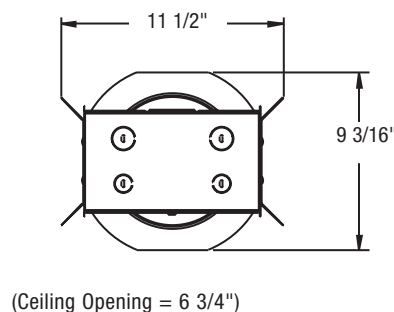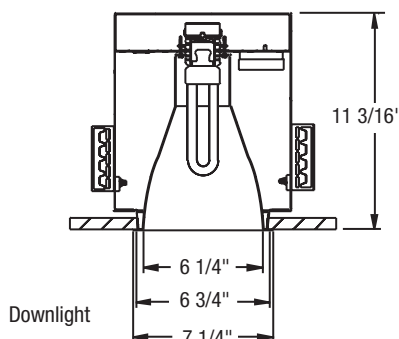



SPEC-5

- All options come with Matte Clear Trim and White Painted Flange.
- Offers excellent brightness control in a 6" aperture.
- Reflector is one piece spun aluminum with 1/2" flat flange with low iridescence.
- Provided with electronic 0-10V Dimming Ballast, Universal voltage.
- FIF 1045

6" Round CFL Downlight and Wallwasher 0-10V Dimming Ballast

SPEC-5 Housing

	DU	-	
HOUSING	BALLAST/VOLTAGE	OPTIONS	ORDERING PART NUMBER
S5D6309 6" Vertical Compact Fluorescent Downlight - (1) 26W / 32W / 42W Triple Tube	DU 0-10V Dimming, 120/277V	-	05434468
S5W6309 6" Vertical Compact Fluorescent Wallwasher - (1) 26W / 32W / 42W Triple Tube	DU 0-10V Dimming, 120/277V	-	05434468




SPEC-5 Trim

		MC	W	
HOUSING	TRIM	TRIM FINISH	FLANGE	ORDERING PART NUMBER
S5D6309 6" Vertical Compact Fluorescent Downlight (1) 26W / 32W / 42W Triple Tube	6308R Downlight Reflector	MC Matte Clear	W White	6308RCW
S5W6309 6" Vertical Compact Fluorescent Downlight (1) 26W / 32W / 42W Triple Tube	6308W Wallwasher Reflector	MC Matte Clear	W White	6308WMCW

SPEC-5 Mounting

9930	9930
MOUNTING DESCRIPTION	ORDERING PART NUMBER
9930 Set of two 27" C-Channel mounting bars	9930

Fixture Dimensions

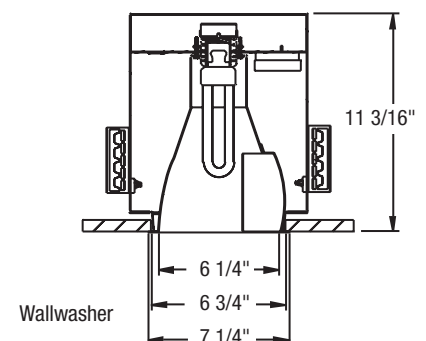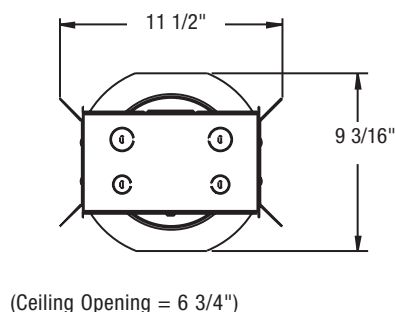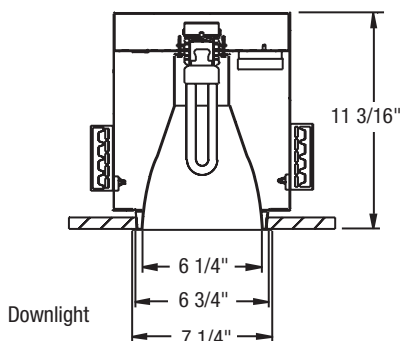



SPEC-5

- All options come with Matte Clear Trim and White Painted Flange.
- Offers excellent brightness control in a 6" aperture.
- Reflector is one piece spun aluminum with 1/2" flat flange with low iridescence.
- Provided with Advance Mark X Dimming Ballast.
- FIF 1045

6" Round CFL Downlight and Wallwasher ADVANCE MARK X Ballast

SPEC-5 Housing

HOUSING	BALLAST/VOLTAGE	OPTIONS	ORDERING PART NUMBER
S5D6309 6" Vertical Compact Fluorescent Downlight - (1) 26W / 32W / 42W Triple Tube	AX1 ADVANCE MARK X 120V	—	11004088
	AX2 ADVANCE MARK X 277V	—	11004089
S5W6309 6" Vertical Compact Fluorescent Wallwasher - (1) 26W / 32W / 42W Triple Tube	AX1 ADVANCE MARK X 120V	—	11004088
	AX1 ADVANCE MARK X 277V	—	11004089


SPEC-5 Trim

HOUSING	TRIM	MC TRIM FINISH	W FLANGE	ORDERING PART NUMBER
S5D6309 6" Vertical Compact Fluorescent Downlight (1) 26W / 32W / 42W Triple Tube	6308R Downlight Reflector	MC Matte Clear	W White	6308RMCW
S5W6309 6" Vertical Compact Fluorescent Downlight (1) 26W / 32W / 42W Triple Tube	6308W Wallwasher Reflector	MC Matte Clear	W White	6308WMCW


SPEC-5 Mounting

9930 MOUNTING DESCRIPTION	9930 ORDERING PART NUMBER
9930 Set of two 27" C-Channel mounting bars	9930


Fixture Dimensions

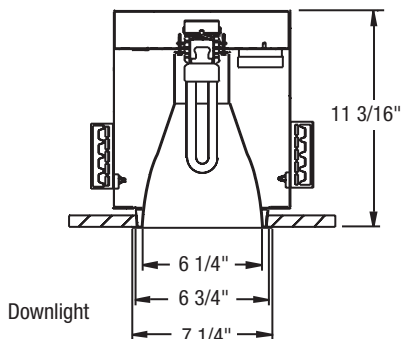


Downlight

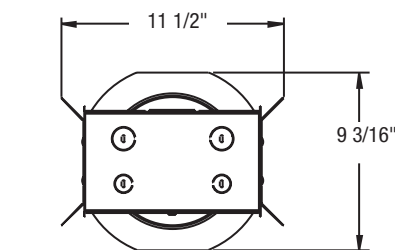

(Ceiling Opening = 6 3/4")

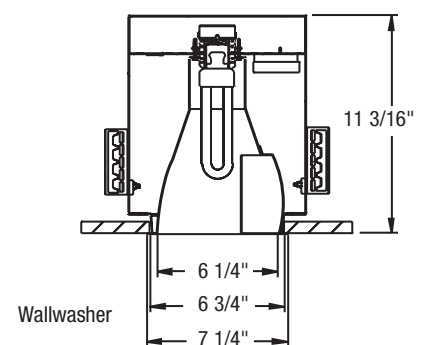


Wallwasher




GLOBAL Trac

- 1-circuit / 1-neutral, 120V track
- All track and components provided in White finish to match KAVEROS on ZOOM! 10 Days Program
- Components and mounting accessories available
- Track is field cuttable
- FIF 1059

LENGTH or MONOPOINT	ORDERING PART NUMBER
GES 204 - 3 4' Track Length, White	05014373
GES 208 - 3 8' Track Length, White	05014376
GES 70 - 3 120V Monopoint, White	05014398

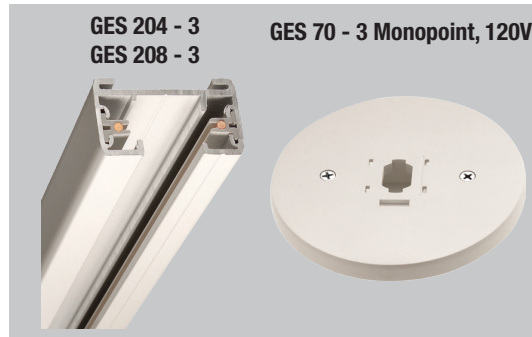

Track Dimensions



Nominal Length	Actual Length
4'	44"
8'	92"
12'	140"

ACCESSORIES	ORDERING PART NUMBER
GES 11 + 41 - 3 120V Live End Feed, White	05014390
GES 21 - 3 120V Linear Coupler, White	05014394
GES 13 + 1x41 - 3 120V Conduit End Feed - Left, White	05014410
GES 34 + 2x41 - 3 120V L-Feed, White	05014402
GES 41 - 3 Dead End / Blank Cover, White	05014392
GES 15 - 3 Outlet Box Cover, White	05014310



SUSPENSION PARTS	ORDERING PART NUMBER
GEA 6 - 1 Threaded Rod Mounting Clip	05014442
GEA 10 - 3 Universal Stem Suspension Point, White	05014444
GEA 37/24 - 3 Stem and Canopy Kit, 3/8", 24", White	05014452
GEA 37/48 - 3 Stem and Canopy Kit, 3/8", 48", White	05014454





KAVEROS


- All options come with Universal Driver and 1-circuit adapter.
- Small (2" aperture), Medium (3" aperture), or Large (4" aperture), painted White.
- Patented TIR LED module, produces Clean Beam - symmetrical, smooth, and free of striations.
- Optics are field inter-changeable. White light LED module.
- 360° horizontal rotation, with tilt angle 0° to +/- 90° (180° total). Tilt is lockable.
- CRI = 85 typical.
- Small FIF 1046; Medium FIF 657; Large FIF 1065

LED Track Head



FIXTURE	WATTAGE	CCT	BEAM SPREAD	85 CRI	WH FINISH	GES ADAPTER	UNV DRIVER	ORDERING PART NUMBER
KAVS KAVEROS Track Fixture, Small	12W 12 Watts	K27 2700K	SP Spot - 15° 759 lumens, 6998 CBCP	85 85 CRI typical	WH White	GES Global 1-circuit track, 120V	UNV 120/277V	11004717
			NF Narrow Flood - 20° 754 lumens, 4194 CBCP	85 85 CRI typical	WH White	GES Global 1-circuit track, 120V	UNV 120/277V	11004718
			FL Flood - 45° 683 lumens, 938 CBCP	85 85 CRI typical	WH White	GES Global 1-circuit track, 120V	UNV 120/277V	11004719
		K30 3000K	SP Spot - 15° 759 lumens, 6998 CBCP	85 85 CRI typical	WH White	GES Global 1-circuit track, 120V	UNV 120/277V	11001514
			NF Narrow Flood - 20° 754 lumens, 4194 CBCP	85 85 CRI typical	WH White	GES Global 1-circuit track, 120V	UNV 120/277V	11003386
			FL Flood - 45° 683 lumens, 938 CBCP	85 85 CRI typical	WH White	GES Global 1-circuit track, 120V	UNV 120/277V	11003388
KAVM KAVEROS Track Fixture, Medium	18W 18 Watts	K30 3000K	SP Spot - 15° 1064 lumens, 9509 CBCP	85 85 CRI typical	WH White	GES Global 1-circuit track, 120V	UNV 120/277V	11004720
			NF Narrow Flood - 25° 1057 lumens, 3595 CBCP	85 85 CRI typical	WH White	GES Global 1-circuit track, 120V	UNV 120/277V	11004636
			FL Flood - 45° 997 lumens, 1352 CBCP	85 85 CRI typical	WH White	GES Global 1-circuit track, 120V	UNV 120/277V	11004721
KAVL KAVEROS Track Fixture, Large	18W 18 Watts	K30 3000K	SP Spot - 8° 1098 lumens, 20745 CBCP	85 85 CRI typical	WH White	GES Global 1-circuit track, 120V	UNV 120/277V	11011104
			NF Narrow Flood - 25° 1138 lumens, 4598 CBCP	85 85 CRI typical	WH White	GES Global 1-circuit track, 120V	UNV 120/277V	11014522
			FL Flood - 45° 939 lumens, 1405 CBCP	85 85 CRI typical	WH White	GES Global 1-circuit track, 120V	UNV 120/277V	11014523


Photometry (Spot)




rev. 12/1/14

Fixture Dimensions


KAVEROS Small




KAVEROS Medium



KAVEROS Large



www.zumtobel.us



ML4 Opal



2' x 2'

Fluorescent Recessed





- All options come with: Opal Lens and "U" Mounting.
- Ideal for offices, retail, healthcare, and educational facilities.
- Option of Lutron EcoSystem™ H-Series Ballast (HSU).
- FIF 312

ML4U	22	2145	OL			
FIXTURE / CEILING TYPE	LENGTH	LAMPING	OPTIC	BALLAST / VOLTAGE	OPTIONS	ORDERING PART NUMBER
ML4U ML4 Recessed 15/16" Lay-In, Flush 9/16" Slot-Grid, Flush 9/16" Lay-In, Tegalur	22 2' X 2'	2145 (2) 14W T5	OL Opal Acrylic Lens	U Universal 120/277V	-	05486983
					WF Whip Flex 3/8" x 6' 14 AWG	11010910
					EM11 Standby Battery Pack, 1 lamp, 120V	11000630
					EM12 Standby Battery Pack, 1 lamp, 277V	11010699
					WFEM11 Whip Flex 3/8" x 6' 14 AWG and Standby Battery Pack, 1 lamp, 120V	11021229
					WFEM12 Whip Flex 3/8" x 6' 14 AWG and Standby Battery Pack, 1 lamp, 277V	11021230
				HSU Dimming, Lutron EcoSystem™, H-Series, Universal 120/277V	-	11005859
					WF Whip Flex 3/8" x 6' 14 AWG	11010914

ML4U	22	2245	OL			
FIXTURE / CEILING TYPE	LENGTH	LAMPING	OPTIC	BALLAST / VOLTAGE	OPTIONS	ORDERING PART NUMBER
ML4U ML4 Recessed 15/16" Lay-In, Flush 9/16" Slot-Grid, Flush 9/16" Lay-In, Tegalur	22 2' X 2'	2245 (2) 24W T5 HO	OL Opal Acrylic Lens	U Universal 120/277V	-	05495560
					WF Whip Flex 3/8" x 6' 14 AWG	11010915
					EM11 Standby Battery Pack, 1 lamp, 120V	05483854
					EM12 Standby Battery Pack, 1 lamp, 277V	11001205
					WFEM11 Whip Flex 3/8" x 6' 14 AWG and Standby Battery Pack, 1 lamp, 120V	11021233
					WFEM12 Whip Flex 3/8" x 6' 14 AWG and Standby Battery Pack, 1 lamp, 277V	11021234
				HSU Dimming, Lutron EcoSystem™, H-Series, Universal 120/277V	-	11005887
					WF Whip Flex 3/8" x 6' 14 AWG	11010917

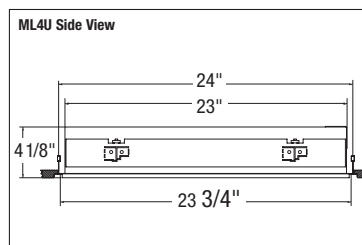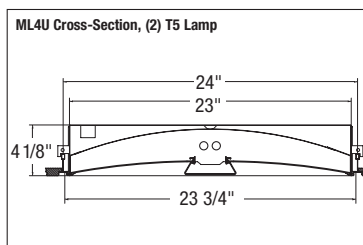

Photometric Data

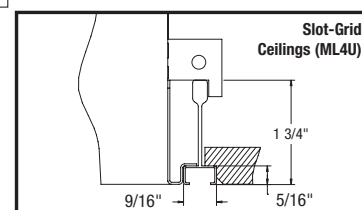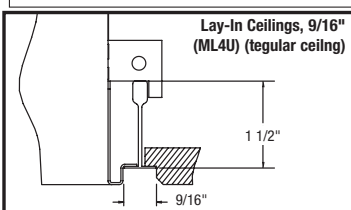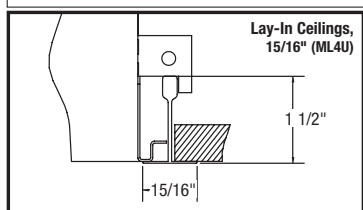



ML4 Opal

Fluorescent Recessed

- All options come with: Opal Lens and "U" Mounting.
- Ideal for offices, retail, healthcare, and educational facilities.
- Option of Lutron EcoSystem™ H-Series Ballast (HSU).
- T5/T5 HO FIF 314; T8 FIF 611

2' x 4'

ML4U	24		OL			
FIXTURE / CEILING TYPE	LENGTH	LAMPING	OPTIC	BALLAST / VOLTAGE	OPTIONS	ORDERING PART NUMBER
ML4U ML Recessed 15/16" Lay-In, Flush 9/16" Slot-Grid, Flush 9/16" Lay-In, Tegalur	24 2' X 4'	2285 (2) 28W T5	OL Opal Acrylic Lens	U Universal 120/277V	-	05517061
					WF Whip Flex 3/8" x 6' 14 AWG	05501695
					EM11 Standby Battery Pack, 1 lamp, 120V	05483884
					EM12 Standby Battery Pack, 1 lamp, 277V	05517064
					WFEM11 Whip Flex 3/8" x 6' 14 AWG and Standby Battery Pack, 1 lamp, 120V	11021236
					WFEM12 Whip Flex 3/8" x 6' 14 AWG and Standby Battery Pack, 1 lamp, 277V	11021237
				HSU Dimming, Lutron EcoSystem™, H-Series, Universal 120/277V	-	11005892
					WF Whip Flex 3/8" x 6' 14 AWG	11010919
		2545 (2) 54W T5 HO	OL Opal Acrylic Lens	U Universal 120/277V	-	11006075
					WF Whip Flex 3/8" x 6' 14 AWG	11010920
					EM11 Standby Battery Pack, 1 lamp, 120V	05467732
					EM12 Standby Battery Pack, 1 lamp, 277V	05484298
					WFEM11 Whip Flex 3/8" x 6' 14 AWG and Standby Battery Pack, 1 lamp, 120V	11021239
					WFEM12 Whip Flex 3/8" x 6' 14 AWG and Standby Battery Pack, 1 lamp, 277V	11021240
				HSU Dimming, Lutron EcoSystem™, H-Series, Universal 120/277V	-	11006076
					WF Whip Flex 3/8" x 6' 14 AWG	11010922
		2328 (2) 32W T8	OL Opal Acrylic Lens	U Universal 120/277V	-	11006078
					WF Whip Flex 3/8" x 6' 14 AWG	05490634
					EM11 Standby Battery Pack, 1 lamp, 120V	05483896
					EM12 Standby Battery Pack, 1 lamp, 277V	05484304
					WFEM1 Whip Flex 3/8" x 6' 14 AWG and Standby Battery Pack, 1 lamp, 120V	05490637
					WFEM12 Whip Flex 3/8" x 6' 14 AWG and Standby Battery Pack, 1 lamp, 277V	11021242
				HSU Dimming, Lutron EcoSystem™, H-Series, Universal 120/277V	-	11006079
					WF Whip Flex 3/8" x 6' 14 AWG	11010924




ML4 Opal

Fluorescent Recessed





- All options come with: Opal Lens and "U" Mounting.
- Ideal for offices, retail, healthcare, and educational facilities.
- Option of Lutron EcoSystem™ H-Series Ballast (HSU).
- FIFs 314 and 611

2' x 4'

ML4U Cross-Section

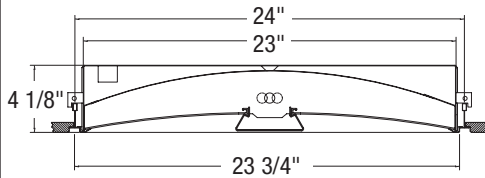


ML4U Side View

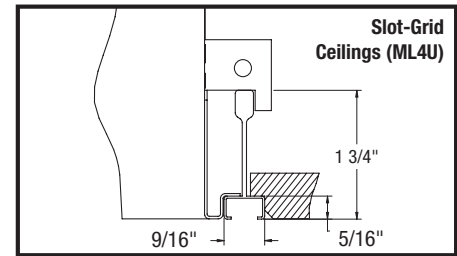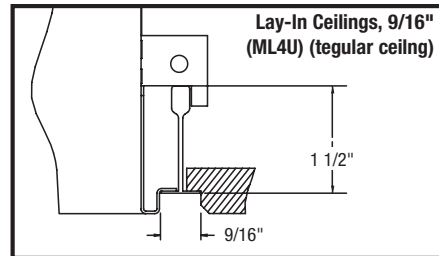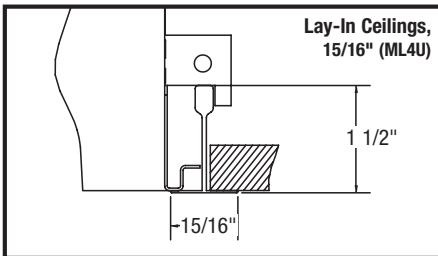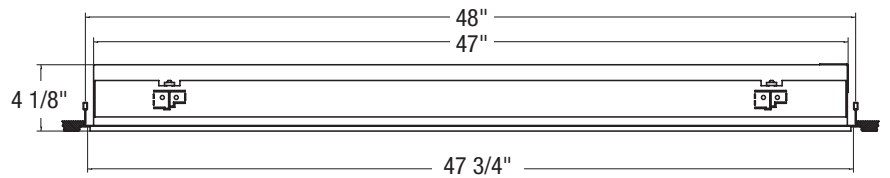


Ceiling (Grid or Block) cannot exceed heights shown in the above drawings.

Photometric Data



T5 / T5 HO
Efficiency = 85%



T8
Efficiency = 73%



ML4 Opal

Fluorescent Recessed

- All options come with Opal Lens and "U" Mounting.
- Ideal for offices, retail, healthcare, and educational facilities.
- Option of Lutron EcoSystem™ H-Series Ballast (HSU).
- T5/T5 HO FIF 313; T8 FIF 610

1' x 4'

ML4U	14		OL			
FIXTURE / CEILING TYPE	LENGTH	LAMPING	OPTIC	BALLAST / VOLTAGE	OPTIONS	ORDERING PART NUMBER
ML4U ML Recessed 15/16" Lay-In, Flush 9/16" Slot-Grid, Flush 9/16" Lay-In, Tegular	14 1' X 4'	1285 (1) 28W T5	OL Opal Acrylic Lens	U Universal 120/277V	-	05476114
					WF Whip Flex 3/8" x 6' 14 AWG	11010933
					EM11 Standby Battery Pack, 1 lamp, 120V	05476111
					EM12 Standby Battery Pack, 1 lamp, 277V	11004097
					WFEM11 Whip Flex 3/8" x 6' 14 AWG and Standby Battery Pack,1 lamp, 120V	11021334
					WFEM12 Whip Flex 3/8" x 6' 14 AWG and Standby Battery Pack, 1 lamp, 277V	11021335
				HSU Dimming, Lutron EcoSystem™, H-Series, Universal 120/277V	-	11006081
				WF Whip Flex 3/8" x 6' 14 AWG	11010934	
		1545 (1) 54W T5 HO	OL Opal Acrylic Lens	U Universal 120/277V	-	11006083
					WF Whip Flex 3/8" x 6' 14 AWG	11005697
					EM11 Standby Battery Pack, 1 lamp, 120V	05483869
					EM12 Standby Battery Pack, 1 lamp, 277V	05484277
					WFEM11 Whip Flex 3/8" x 6' 14 AWG and Standby Battery Pack, 1 lamp, 120V	11021245
					WFEM12 Whip Flex 3/8" x 6' 114 AWG and Standby Battery Pack, 1 lamp, 277V	11021246
				HSU Dimming, Lutron EcoSystem™, H-Series, Universal 120/277V	-	11006084
				WF Whip Flex 3/8" x 6' 14 AWG	11010929	








ML4 Opal

Fluorescent Recessed




1' x 4'

- All options come with Opal Lens and "U" Mounting.
- Ideal for offices, retail, healthcare, and educational facilities.
- Option of Lutron EcoSystem™ H-Series Ballast (HSU).
- T5/T5 HO FIF 313; T8 FIF 610

ML4U	14		OL			
FIXTURE / CEILING TYPE	LENGTH	LAMPING	OPTIC	BALLAST / VOLTAGE	OPTIONS	ORDERING PART NUMBER
ML4U ML Recessed 15/16" Lay-In, Flush 9/16" Slot-Grid, Flush 9/16" Lay-In, Tegular	14 1' X 4'	2285 (2) 28W T5	OL Opal Acrylic Lens	U Universal 120/277V	-	05495542
					WF Whip Flex 3/8" x 6' 14 AWG	11010930
					EM11 Standby Battery Pack, 1 lamp, 120V	11008153
					EM12 Standby Battery Pack, 1 lamp, 277V	05484274
					WFEM11 Whip Flex 3/8" x 6' 14 AWG and Standby Battery Pack, 1 lamp, 120V	11010932
					WFEM12 Whip Flex 3/8" x 6' 14 AWG and Standby Battery Pack, 1 lamp, 277V	11021251
		2328 (2) 32W T8	OL Opal Acrylic Lens	HSU Dimming, Lutron EcoSystem™, H-Series, Universal 120/277V	-	11006086
					WF Whip Flex 3/8" x 6' 14 AWG	11010957
				U Universal 120/277V	-	11006088
					WF Whip Flex 3/8" x 6' 14 AWG	11010954
					EM11 Standby Battery Pack, 1 lamp, 120V	05483878
					EM12 Standby Battery Pack, 1 lamp, 277V	05484286
					WFEM11 Whip Flex 3/8" x 6' 14 AWG and Standby Battery Pack, 1 lamp, 120V	11021254
					WFEM12 Whip Flex 3/8" x 6' 14 AWG and Standby Battery Pack, 1 lamp, 277V	11021255
				HSU Dimming, Lutron EcoSystem™, H-Series, Universal 120/277V	-	11006089
					WF Whip Flex 3/8" x 6' 14 AWG	11010956

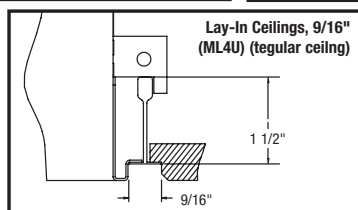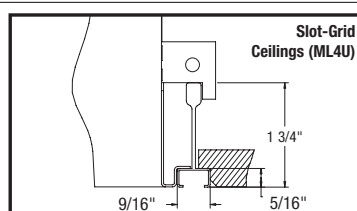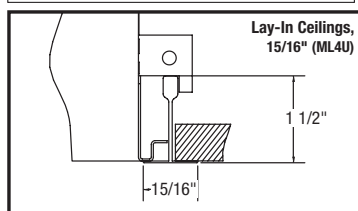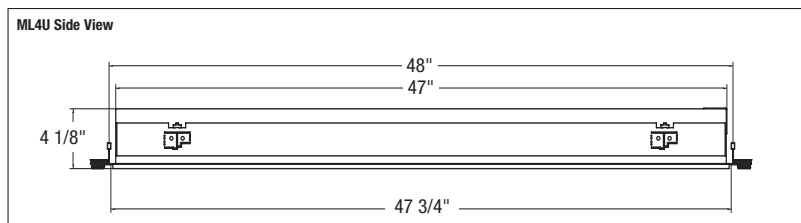

Photometric Data



Ceiling (Grid or Block) cannot exceed heights shown in the above drawings.



ZX52

- All options come with Aisle Optic with White Cross-Blades, White Housing, and Universal 120/277V Ballast
- Starters and Individual fixtures come with 70" feed cord
- Order Individual fixtures, or order Starters, Mids, Ends, and Suspensions for Continuous Runs
- FIF 1016

			LA	W	U		
FIXTURE	LAMPING	LENGTH	OPTIC	HOUSING COLOR	VOLTAGE/BALLAST	FEED	ORDERING PART NUMBER
ZX52I ZX52 Individual	1545 (1) 54W T5HO	4 4 ft.	LA Aisle Optic, Specular Internal Reflector with White Cross Blades	W White	U Universal 120/277V	CF1 70" feed cord for pendant mount attached to Individuals and Starters	11003229
ZX52S ZX52 Starter	1545 (1) 54W T5HO	4 4 ft.	LA Aisle Optic, Specular Internal Reflector with White Cross Blades	W White	U Universal 120/277V	CF1 70" feed cord for pendant mount attached to Individuals and Starters	11002893
ZX52M ZX52 Mid	1545 (1) 54W T5HO	4 4 ft.	LA Aisle Optic, Specular Internal Reflector with White Cross Blades	W White	U Universal 120/277V	-	11002894
ZX52E ZX52 End	1545 (1) 54W T5HO	4 4 ft.	LA Aisle Optic, Specular Internal Reflector with White Cross Blades	W White	U Universal 120/277V	-	11002895
ZX52I ZX52 Individual	2545 (2) 54W T5HO	8 8 ft.	LA Aisle Optic, Specular Internal Reflector with White Cross Blades	W White	U Universal 120/277V	CF1 70" feed cord for pendant mount attached to Individuals and Starters	11003230
ZX52S ZX52 Starter	2545 (2) 54W T5HO	8 8 ft.	LA Aisle Optic, Specular Internal Reflector with White Cross Blades	W White	U Universal 120/277V	CF1 70" feed cord for pendant mount attached to Individuals and Starters	11002896
ZX52M ZX52 Mid	2545 (2) 54W T5HO	8 8 ft.	LA Aisle Optic, Specular Internal Reflector with White Cross Blades	W White	U Universal 120/277V	-	11002899
ZX52E ZX52 End	2545 (2) 54W T5HO	8 8 ft.	LA Aisle Optic, Specular Internal Reflector with White Cross Blades	W White	U Universal 120/277V	-	11002902
ZX52I ZX52 Individual	3545 (3) 54W T5HO	12 12 ft.	LA Aisle Optic, Specular Internal Reflector with White Cross Blades	W White	U Universal 120/277V	CF1 70" feed cord for pendant mount attached to Individuals and Starters	11003234
ZX52S ZX52 Starter	3545 (3) 54W T5HO	12 12 ft.	LA Aisle Optic, Specular Internal Reflector with White Cross Bladess	W White	U Universal 120/277V	CF1 70" feed cord for pendant mount attached to Individuals and Starters	11003231
ZX52M ZX52 Mid	3545 (3) 54W T5HO	12 12 ft.	LA Aisle Optic, Specular Internal Reflector with White Cross Blades	W White	U Universal 120/277V	-	11003232
ZX52E ZX52 End	3545 (3) 54W T5HO	12 12 ft.	LA Aisle Optic, Specular Internal Reflector with White Cross Blades	W White	U Universal 120/277V	-	11003233

Power Feeds

ZX52	CBL070		
FIXTURE	MOUNTING	CANOPY	ORDERING PART NUMBER
ZX52 ZX52	CBL070 70" Cable	J5FW J-box mounting, 5" round, flat canopy, White	11002904
ZX52 ZX52	CBL070 70" Cable	T5FW T-bar mounting, 5" round, flat canopy, White	11002905




Non-Power Feeds

ZX52	CBL070		
FIXTURE	MOUNTING	CANOPY	ORDERING PART NUMBER
ZX52 ZX52	CBL070 70" Cable	J5W J-box mounting, 5" round, flat canopy, White	11002907
ZX52 ZX52	CBL070 70" Cable	S5W 1/4-20, 5" flat canopy, White	11002908




ZX52


- All options come with Aisle Optic with White Cross-Blades, White Housing, and Universal 120/277V Ballast
- Starters and Individual fixtures come with 70" feed cord
- Order Individual fixtures, or order Starters, Mids, Ends, and Suspensions for Continuous Runs
- FIF 1016

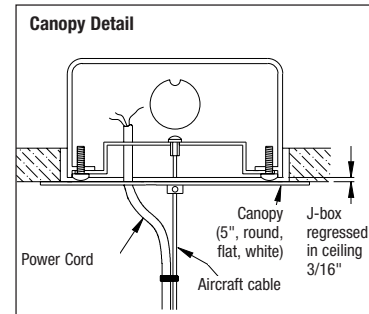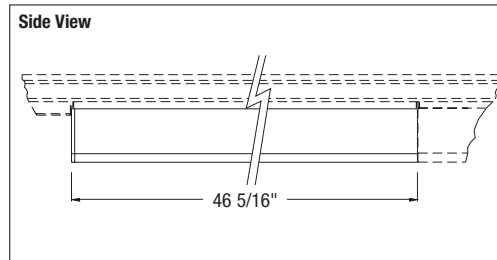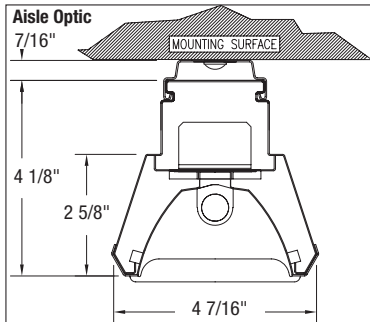


T5 T-bar Mounted with Power Feed

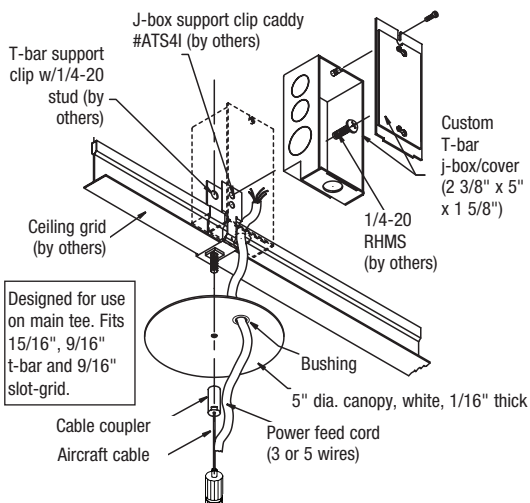


J5 J-box Mounted with Power Feed

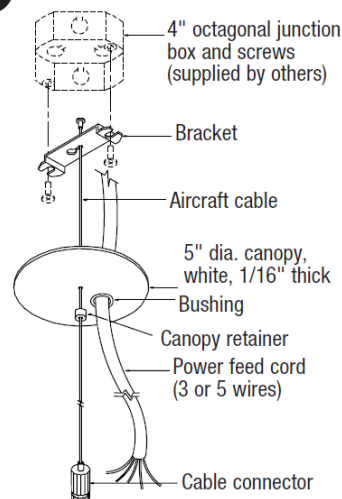


J5 J-box Mounted Non-Power Feed

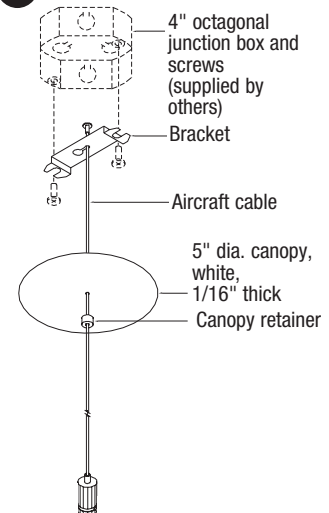

S5 1/4-20 Fastener

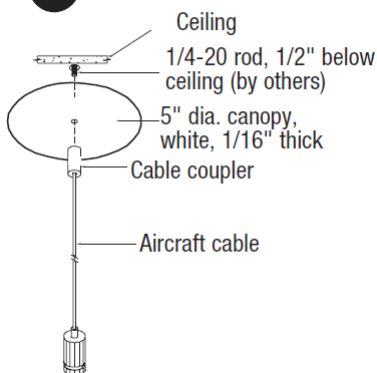



SLOTLIGHT

- Ideal for applications in restricted space
- Staggered lamping
- Length options (nominal) for sheetrock ceiling are 4', 8', and longer runs using 4' and 8' Starter, Mid, and End Units
- Length options for grid ceiling are 4', 8', 12', 16', 20', and 24'
- FIF 1034


SCON4	EA			P	W		
APERTURE	CEILING TYPE / MOUNTING	LAMPING	LENGTH	OPTIC	HOUSING COLOR	VOLTAGE / BALLAST	OPTIONS
SCON4 SLOTLIGHT Continuous 4" Recessed	EA After Sheetrock Ceiling, Flangeless	1T5 (1) T5 1H5 (1) T5 HO 1T8 (1) T8	4 ft. Nominal Individual 0046.54 (1) 28W T5 0046.54 (1) 54W T5 HO 0048.19 (1) 32W T8 8 ft. Nominal Individual 0088.58 (2) 28W T5 0088.58 (2) 54W T5 HO 0090.98 (2) 32W T8	P Opal Lens, Flush	W White	UNV Universal 120V/277V DAU 0-10V, 120/277V - <u>T5, T8</u> DA1 0-10V, 120V - <u>T5 HO</u> DA2 0-10V, 277V - <u>T5 HO</u> HDU Lutron HiLume 3D, 120/277V	E1 Standby Battery Pack, (1) lamp, 120V E2 Standby Battery Pack, (1) lamp, 277V

Emergency Battery Pack Location


CEILING TYPE	LENGTH	EM LOCATION
After Sheetrock	8 ft	First lamp

Fixture Dimensions - T5

4' T5 Individual - After Sheetrock Flangeless

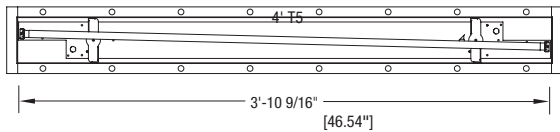


8' T5 Individual - After Sheetrock Flangeless

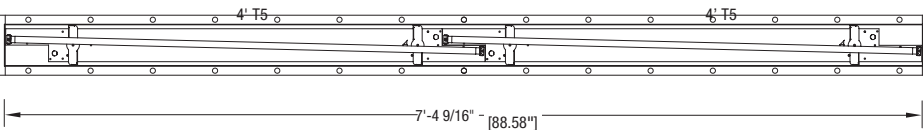


Fixture Dimensions - T8


4' T8 Individual - After Sheetrock Flangeless

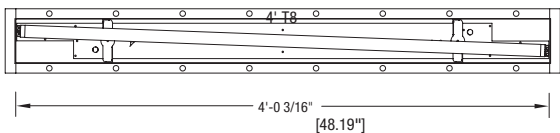



8' T8 Individual - After Sheetrock Flangeless

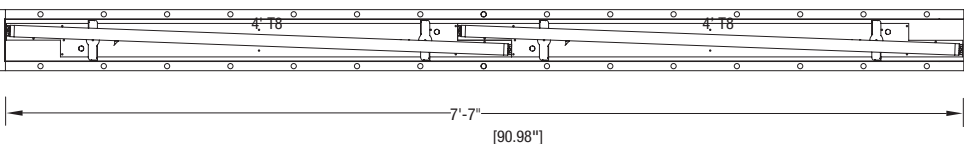


4' After Sheetrock Flangeless Cross-Section

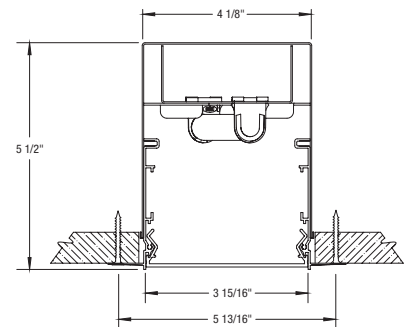

Photometry






SLOTLIGHT

- Ideal for applications in restricted space
- Staggered lamping
- Length options (nominal) for sheetrock ceiling are 4', 8', and longer runs using 4' and 8' Starter, Mid, and End Units
- Length options for grid ceiling are 4', 8', 12', 16', 20', and 24'
- FIF 1034


SCON4	EA			P	W		
APERTURE	CEILING TYPE / MOUNTING	LAMPING	LENGTH	OPTIC	HOUSING COLOR	VOLTAGE / BALLAST	OPTIONS
SCON4 SLOTLIGHT Continuous 4" Recessed	EA After Sheetrock Ceiling, Flangeless	1T5 (1) T5 1H5 (1) T5 HO 1T8 (1) T8	XXXX.XX Length = (1) Starter + (multiple) Mids + (1) End Add lengths below for Continuous Run Length 4 ft. Nominal Starter / End 0044.29 (1) 28W T5 0044.29 (1) 54W T5 HO 0045.45 (1) 32W T8 4 ft. Nominal Mid 0042.13 (1) 28W T5 0042.13 (1) 54W T5 HO 0042.80 (1) 32W T8 8 ft. Nominal Mid 0084.25 (2) 28W T5 0084.25 (2) 54W T5 HO 0085.59 (2) 32W T8	P Opal Lens, Flush	W White	UNV Universal 120V/277V DAU 0-10V, 120/277V - T5, T8 DA1 0-10V, 120V - T5 HO DA2 0-10V, 277V - T5 HO HDU Lutron HiLume 3D, 120/277V	E1 Standby Battery Pack, (1) lamp, 120V E2 Standby Battery Pack, (1) lamp, 277V

Fixture Dimensions - T5


4' T5 Starter - After Sheetrock Flangeless

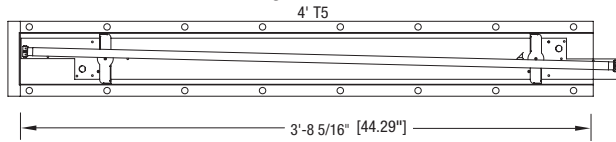


4' T5 Mid - After Sheetrock Flangeless

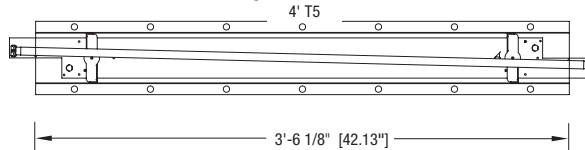

8' T5 Mid - After Sheetrock Flangeless

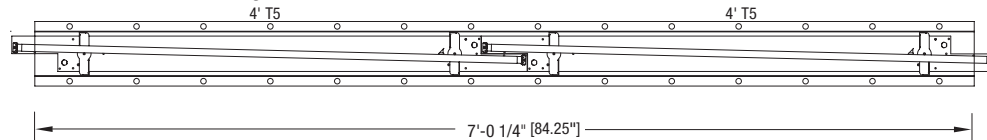

4' T5 End - After Sheetrock Flangeless

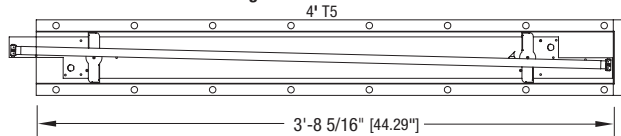


Emergency Battery Pack Location


CEILING TYPE	LENGTH	EM LOCATION
After Sheetrock	8 ft	First lamp

Fixture Dimensions - T8


4' T8 Starter - After Sheetrock Flangeless

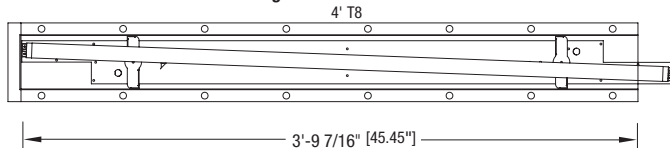


4' T8 Mid - After Sheetrock Flangeless

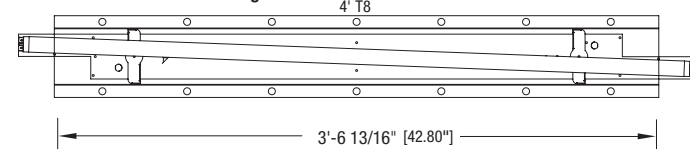


4' T8 End - After Sheetrock Flangeless

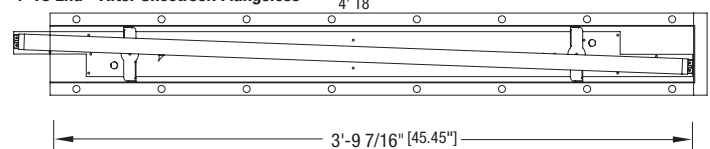

8' T8 Mid - After Sheetrock Flangeless

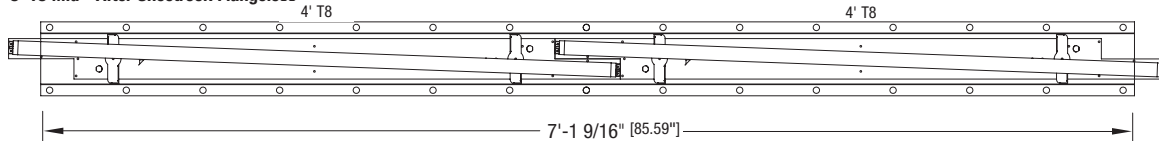




SLOTLIGHT

- Ideal for applications in restricted space
- Staggered lamping
- Length options (nominal) for sheetrock ceiling are 4', 8', and longer runs using 4' and 8' Starter, Mid, and End Units
- Length options for grid ceiling are 4', 8', 12', 16', 20', and 24'
- FIF 1034

SCON4				P	W		
APERTURE	CEILING TYPE / MOUNTING	LAMPING	LENGTH	OPTIC	HOUSING COLOR	VOLTAGE / BALLAST	OPTIONS
SCON4 SLOTLIGHT Continuous 4" Recessed	IN 9/16" Lay-in, Flush SG 9/16" Slot Grid 9/16" Grid, Tegular	1T5 (1) T5 1H5 (1) T5 HO 1T8 (1) T8	4 ft. 0047.40 (1) 28W T5 0047.40 (1) 54W T5 HO 0047.40 (1) 32W T8	P Opal Lens, Flush	W White	UNV Universal 120V/277V DAU 0-10V, 120/277V - <u>T5, T8</u> DA1 0-10V, 120V - <u>T5 HO</u> DA2 0-10V, 277V - <u>T5 HO</u> HDU Lutron HiLume 3D, 120/277V	E1 Standby Battery Pack, (1) lamp, 120V E2 Standby Battery Pack, (1) lamp, 277V
			8 ft. 0095.40 (3) 21W T5 0095.40 (3) 39W T5 HO 0095.40 (3) 25W T8			UNV Universal 120V/277V DAU 0-10V, 120/277V - <u>T5, T8</u> HDU Lutron HiLume 3D, 120/277V	E1 Standby Battery Pack, (1) lamp, 120V E2 Standby Battery Pack, (1) lamp, 277V
			12 ft. 0143.40 (2) 28W T5, (2) 21W T5 0143.40 (2) 54W T5 HO, (2) 39W T5 HO 0143.40 (2) 25W T8, (2) 32W T8				
			16 ft. 0191.40 (2) 21W T5, (3) 28W T5 0191.40 (2) 39W T5 HO, (3) 54W T5 HO 0191.40 (2) 25W T8, (3) 32W T8				
			20 ft. 0239.40 (5) 28W T5, (1) 21W T5 0239.40 (5) 54W T5 HO, (1) 39W T5 HO 0239.40 (2) 32W T8, (5) 25W T8				
			24 ft. 0287.40 (1) 21W T5, (6) 28W T5 0287.40 (1) 39W T5 HO, (6) 54W T5 HO 0287.40 (1) 25W T8, (6) 32W T8				

Emergency Battery Pack Location

CEILING TYPE	LENGTH	EM LOCATION
Grid	8 ft	Mid lamp
Grid	12 ft	Indicate lamp on drawing
Grid	16 ft	Indicate lamp on drawing
Grid	20 ft	Indicate lamp on drawing
Grid	24 ft	Indicate lamp on drawing




SLOTLIGHT


- Ideal for applications in restricted space
- Staggered lamping
- Length options (nominal) for sheetrock ceiling are 4', 8', and longer runs using 4' and 8' Starter, Mid, and End Units
- Length options for grid ceiling are 4', 8' 12', 16', 20', and 24'

Fixture Dimensions - T5


4' T5 Individual - Lay-in, Flush/Slot Grid

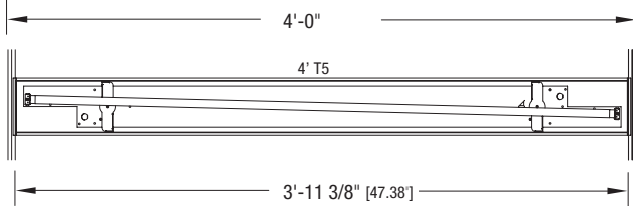


8' T5 Individual - Lay-In, Flush/Slot Grid

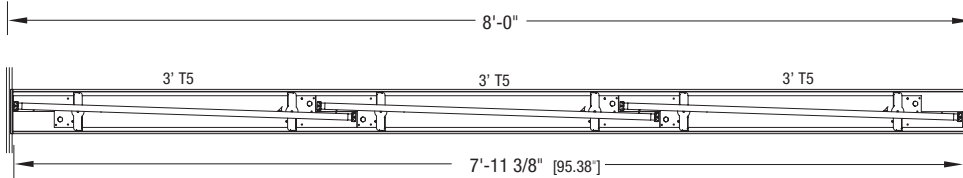


12' T5 Individual - Lay-In, Flush/Slot Grid

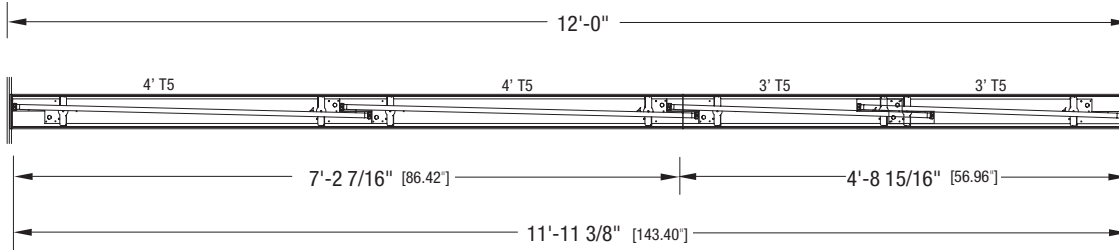


16' T5 Individual - Lay-In, Flush/Slot Grid

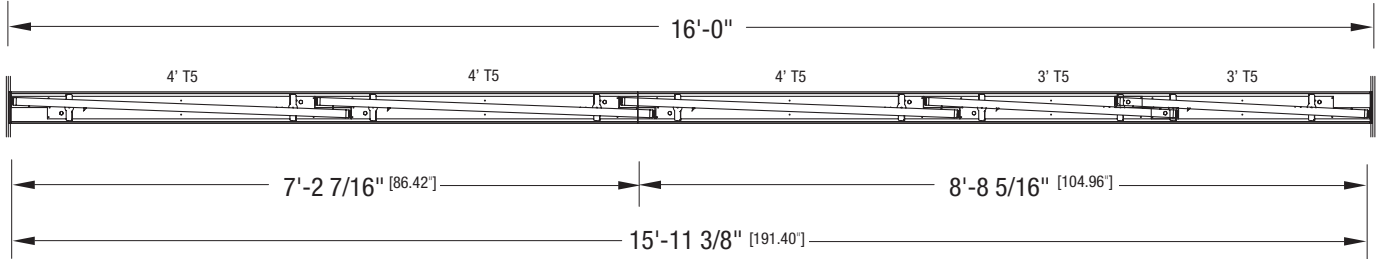


20' T5 - Lay-In, Flush/Slot Grid

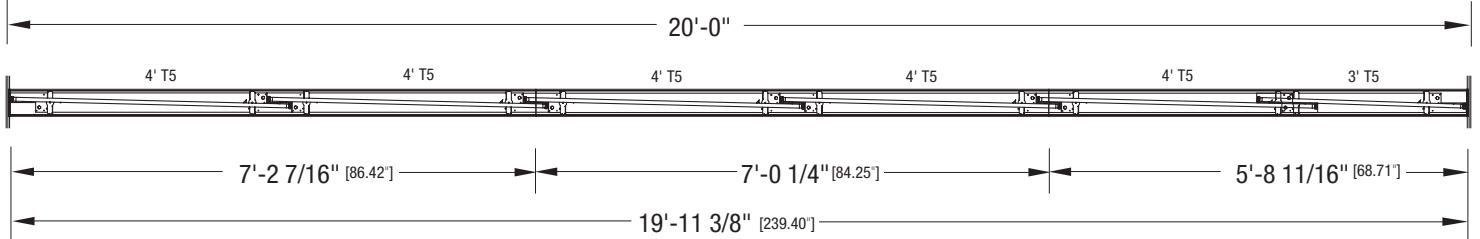


24' T5 - Lay-In, Flush/Slot Grid

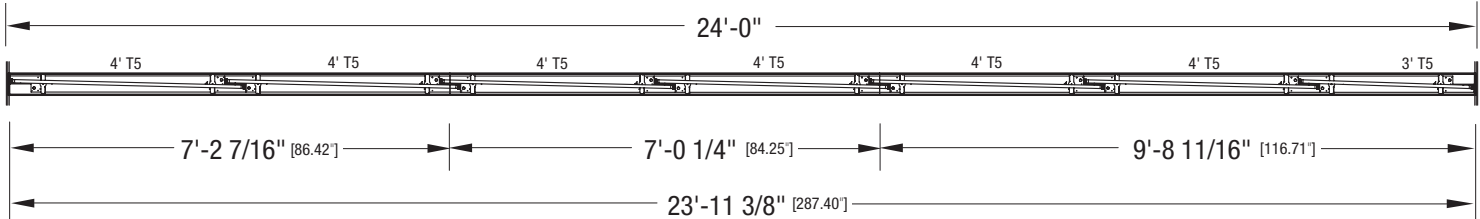

4' Lay-In, Flush Cross-Section

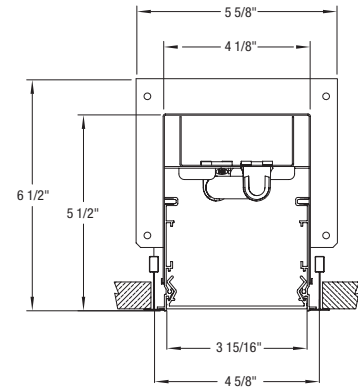




SLOTLIGHT


- Ideal for applications in restricted space
- Staggered lamping
- Length options (nominal) for sheetrock ceiling are 4', 8', and longer runs using 4' and 8' Starter, Mid, and End Units
- Length options for grid ceiling are 4', 8', 12', 16', 20', and 24'

Fixture Dimensions - T8


4' T8 Individual - Lay-in, Flush/Slot Grid

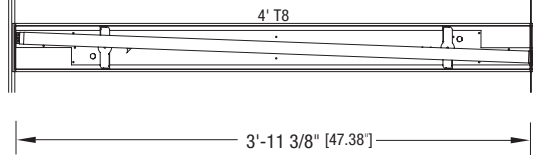


8' T8 Individual - Lay-in, Flush/Slot Grid

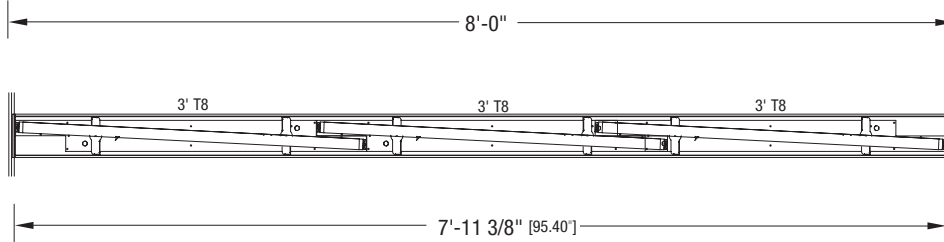


12' T8 Individual - Lay-in, Flush/Slot Grid

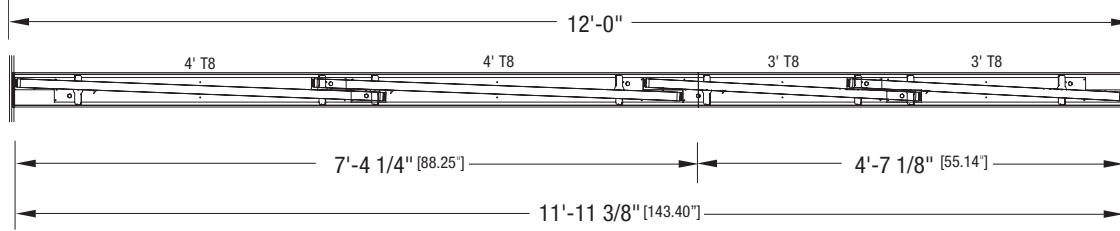


16' T8 Individual - Lay-in, Flush/Slot Grid

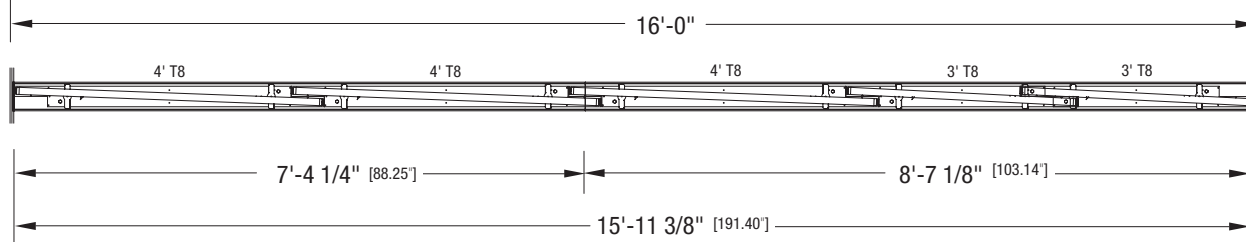


20' T8 - Lay-in, Flush/Slot Grid

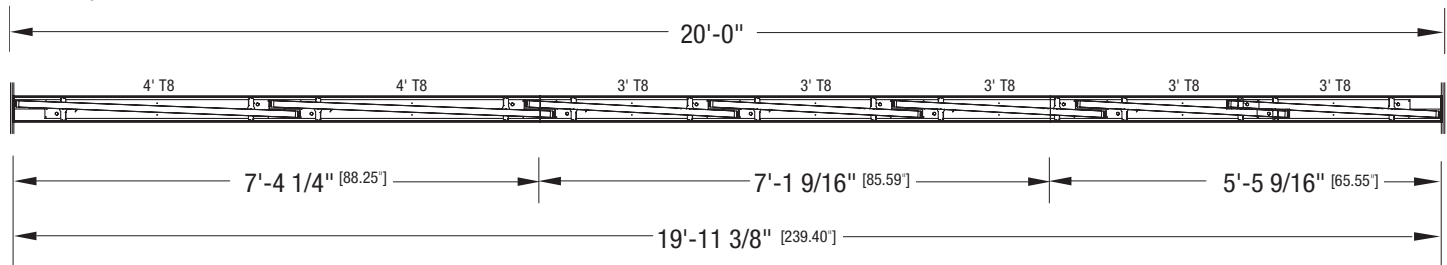

24' T8 - Lay-in, Flush/Slot Grid

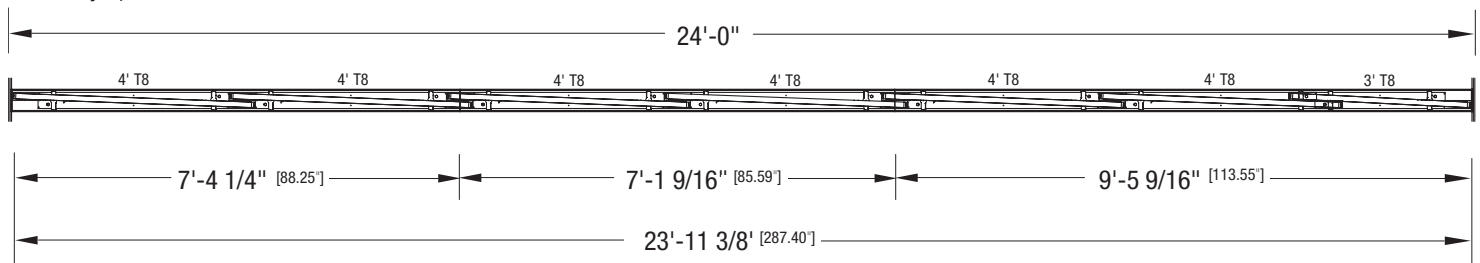

4' Slot Grid Cross-Section

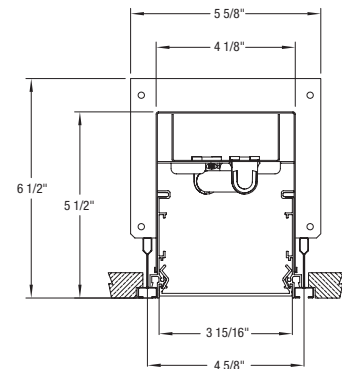

THIS PAGE INTENTIONALLY LEFT BLANK

THIS PAGE INTENTIONALLY LEFT BLANK

THIS PAGE INTENTIONALLY LEFT BLANK

THIS PAGE INTENTIONALLY LEFT BLANK



ZOOM! 10 Day Quick Ship Program

Effective December 1, 2014
Supersedes all previous
guides

Zumtobel Lighting, Inc.

3300 Route 9W
Highland, NY 12528

Main: 845-691-6262
Toll Free: 800-448-4131
Email: zli.us@zumtobelgroup.com

10/14 © Zumtobel Lighting, Inc.
In a continuing effort to offer the best product
possible we reserve the right to change, without
notice, specifications or materials that in our
opinion will not alter the function of the product.
Technical data was correct at time of going to press.

www.zumtobel.us