



ZUMTOBEL

SLOTLIGHT II


**Recessed, surface-mounted
and pendant luminaire**

The straight-ahead luminaire:
from indoors to outdoors,
even round the corner.
Pure. Uniform. Efficient.

[linked](#)

All order numbers in the PDF are linked
to the Zumtobel online catalogue.




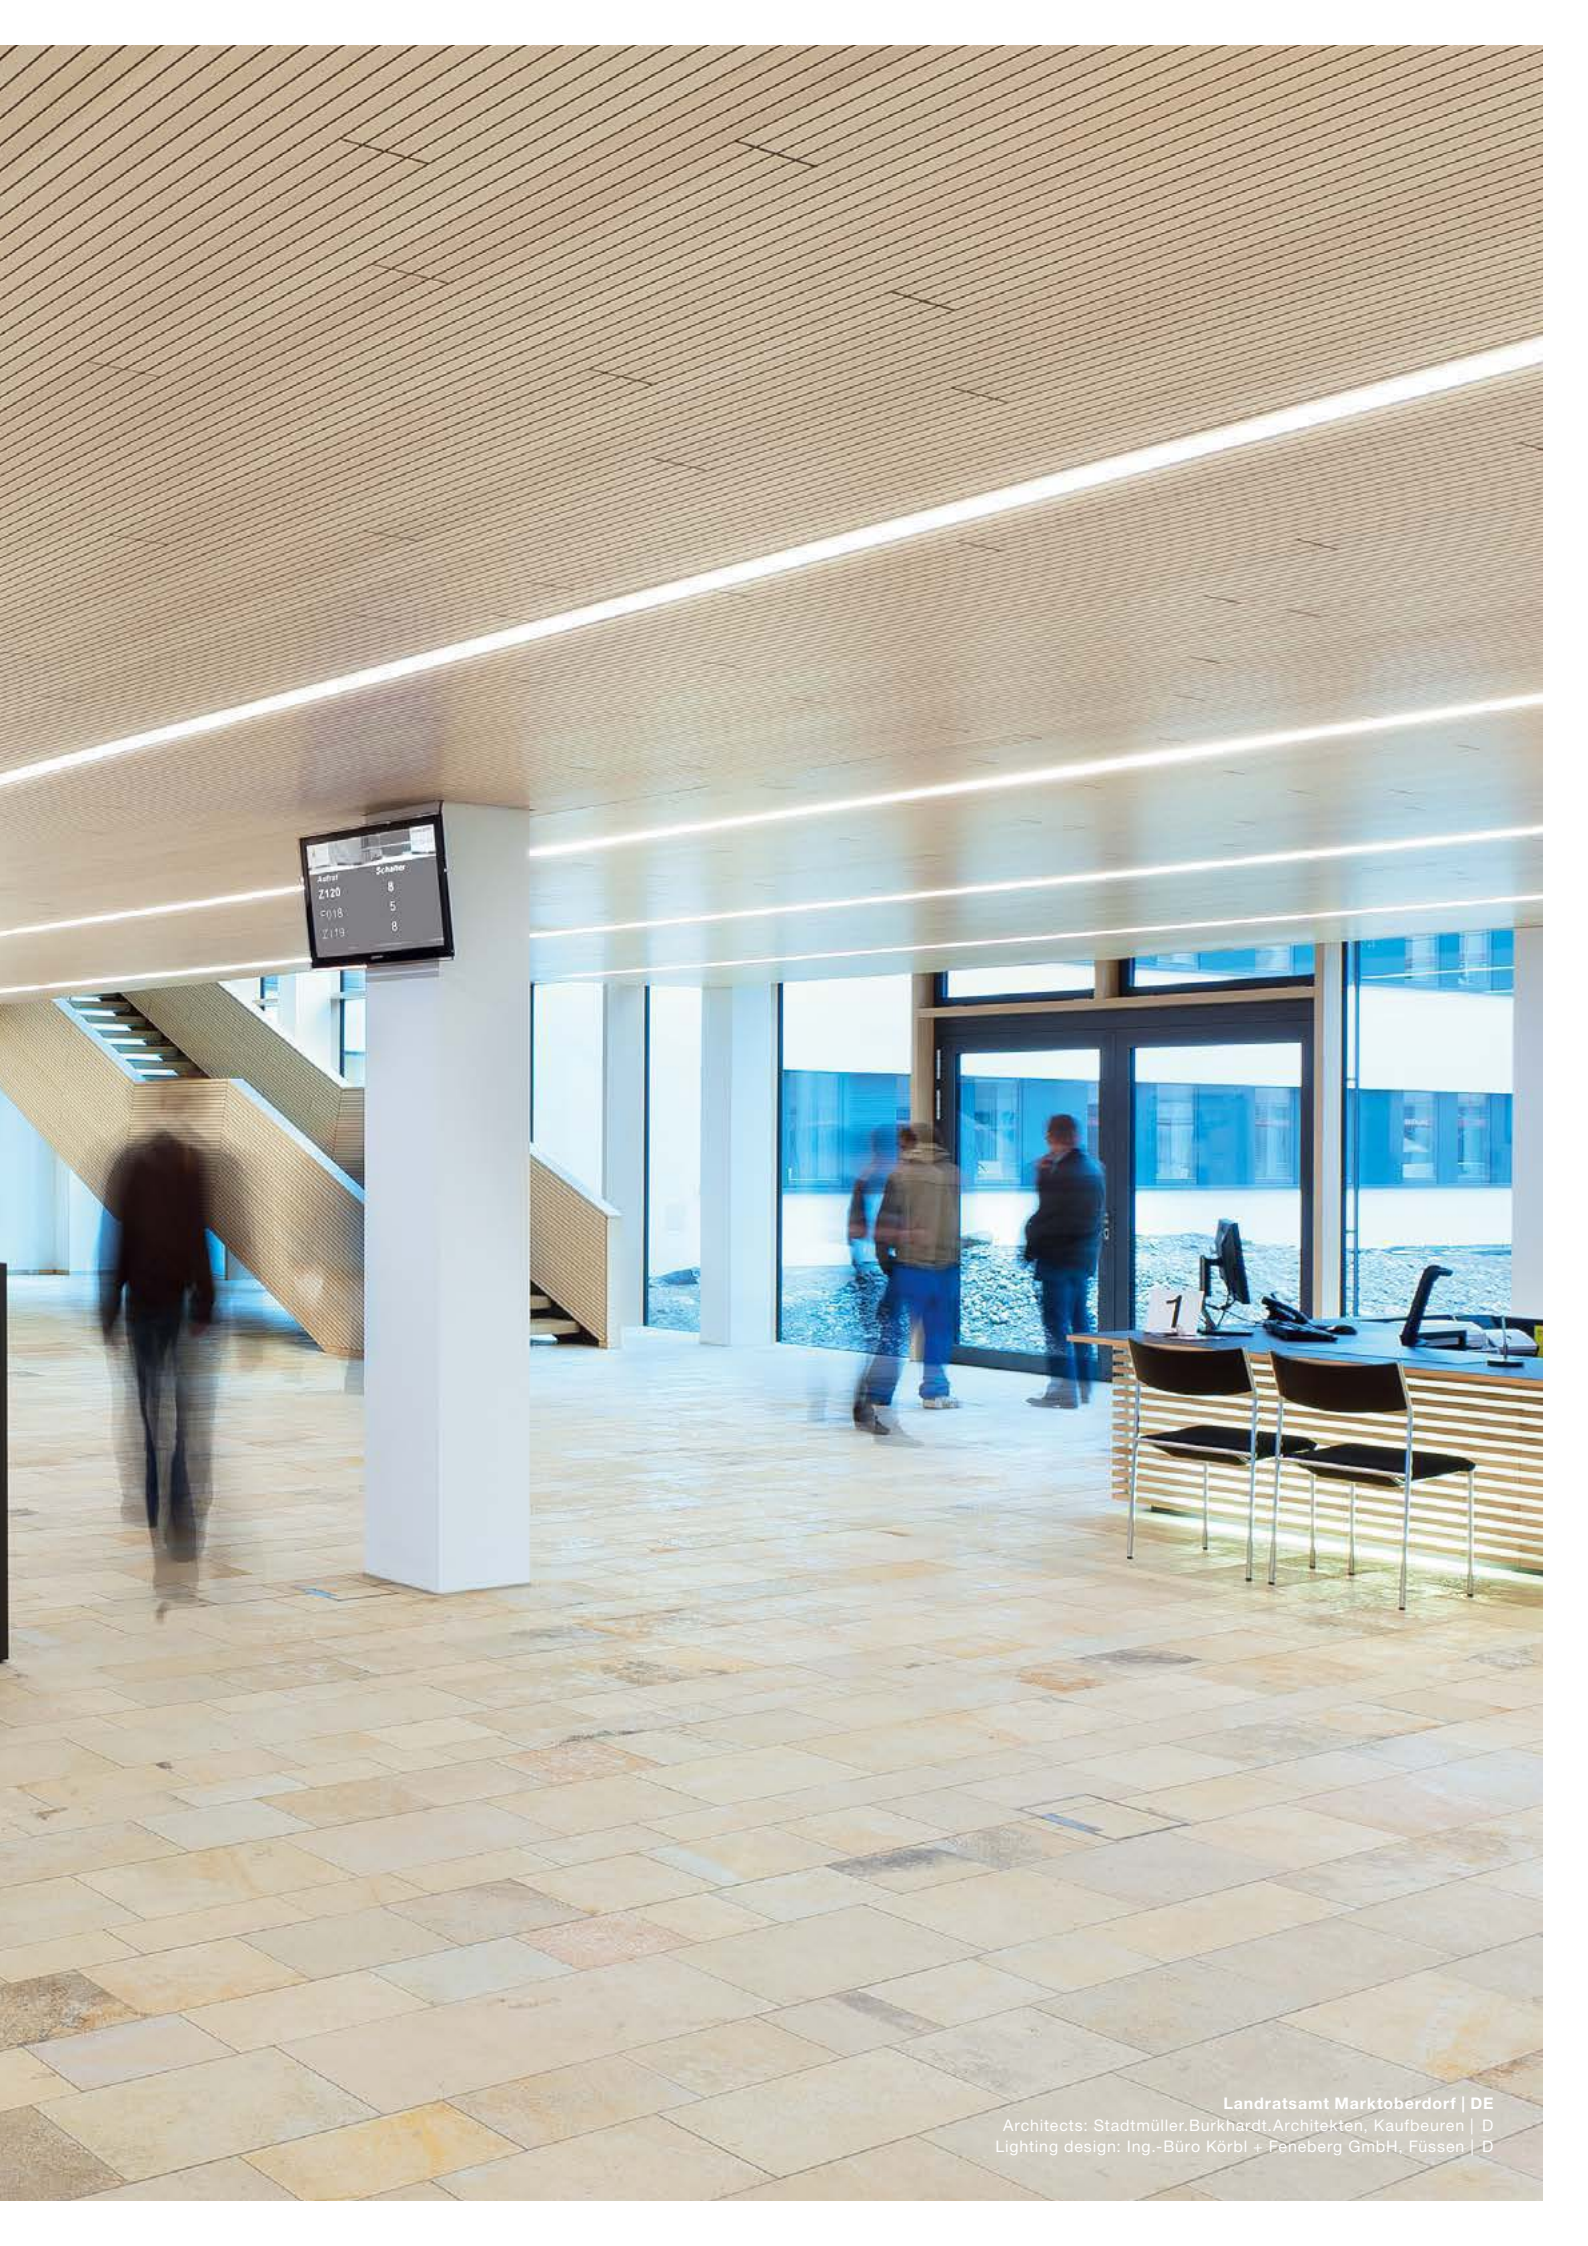


Anzahl	Schalter
Z120	8
F018	5
Z119	8



PURE LIGHT

SLOTLIGHT II recessed into the ceiling

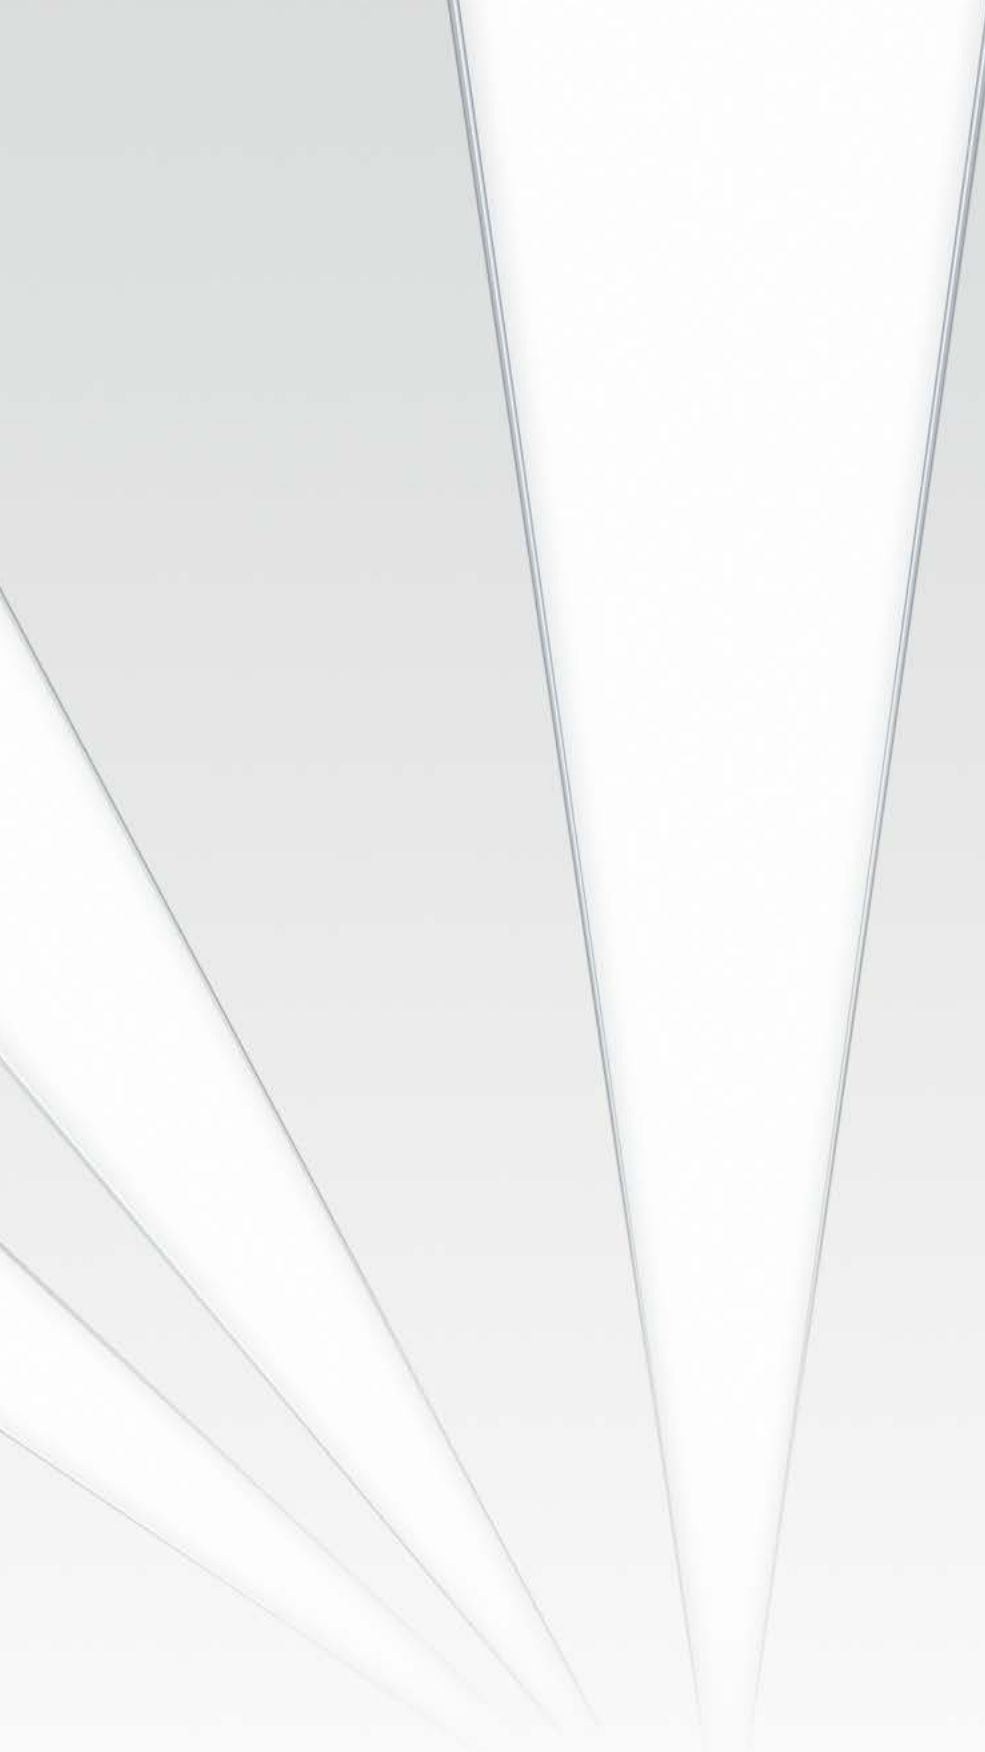

SLOTLIGHT II

Recessed



Recessed inc. frame



BOUNDLESS LIGHT

SLOTLIGHT II Surface-mounted and pendant luminaire


SLOTLIGHT II Surface-mounted Pendant

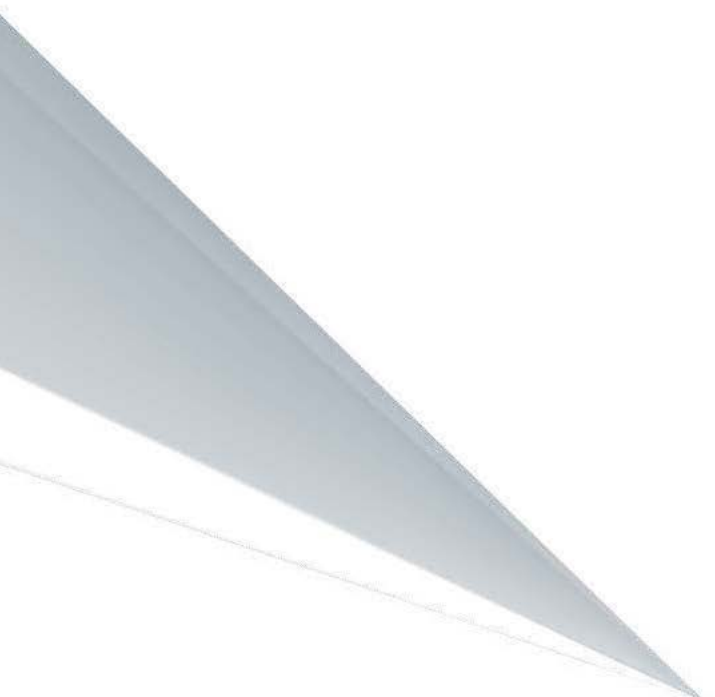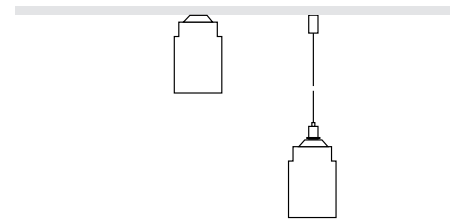

SLOTLIGHT II

The straight-ahead luminaire

No more fuss SLOTLIGHT II knows how to take light round the corner, its illuminated L-connectors providing scope for new dimensions of creative design. Room geometries can be made clear more effectively, room zones can be redefined and corner areas can be brought into sharper focus by using light. The 90° angle modules are not merely connecting elements; they blend in as an integral part of the luminaire, their consistent, virtually end-to-end illumination being just as perfect as the dead straight light lines.

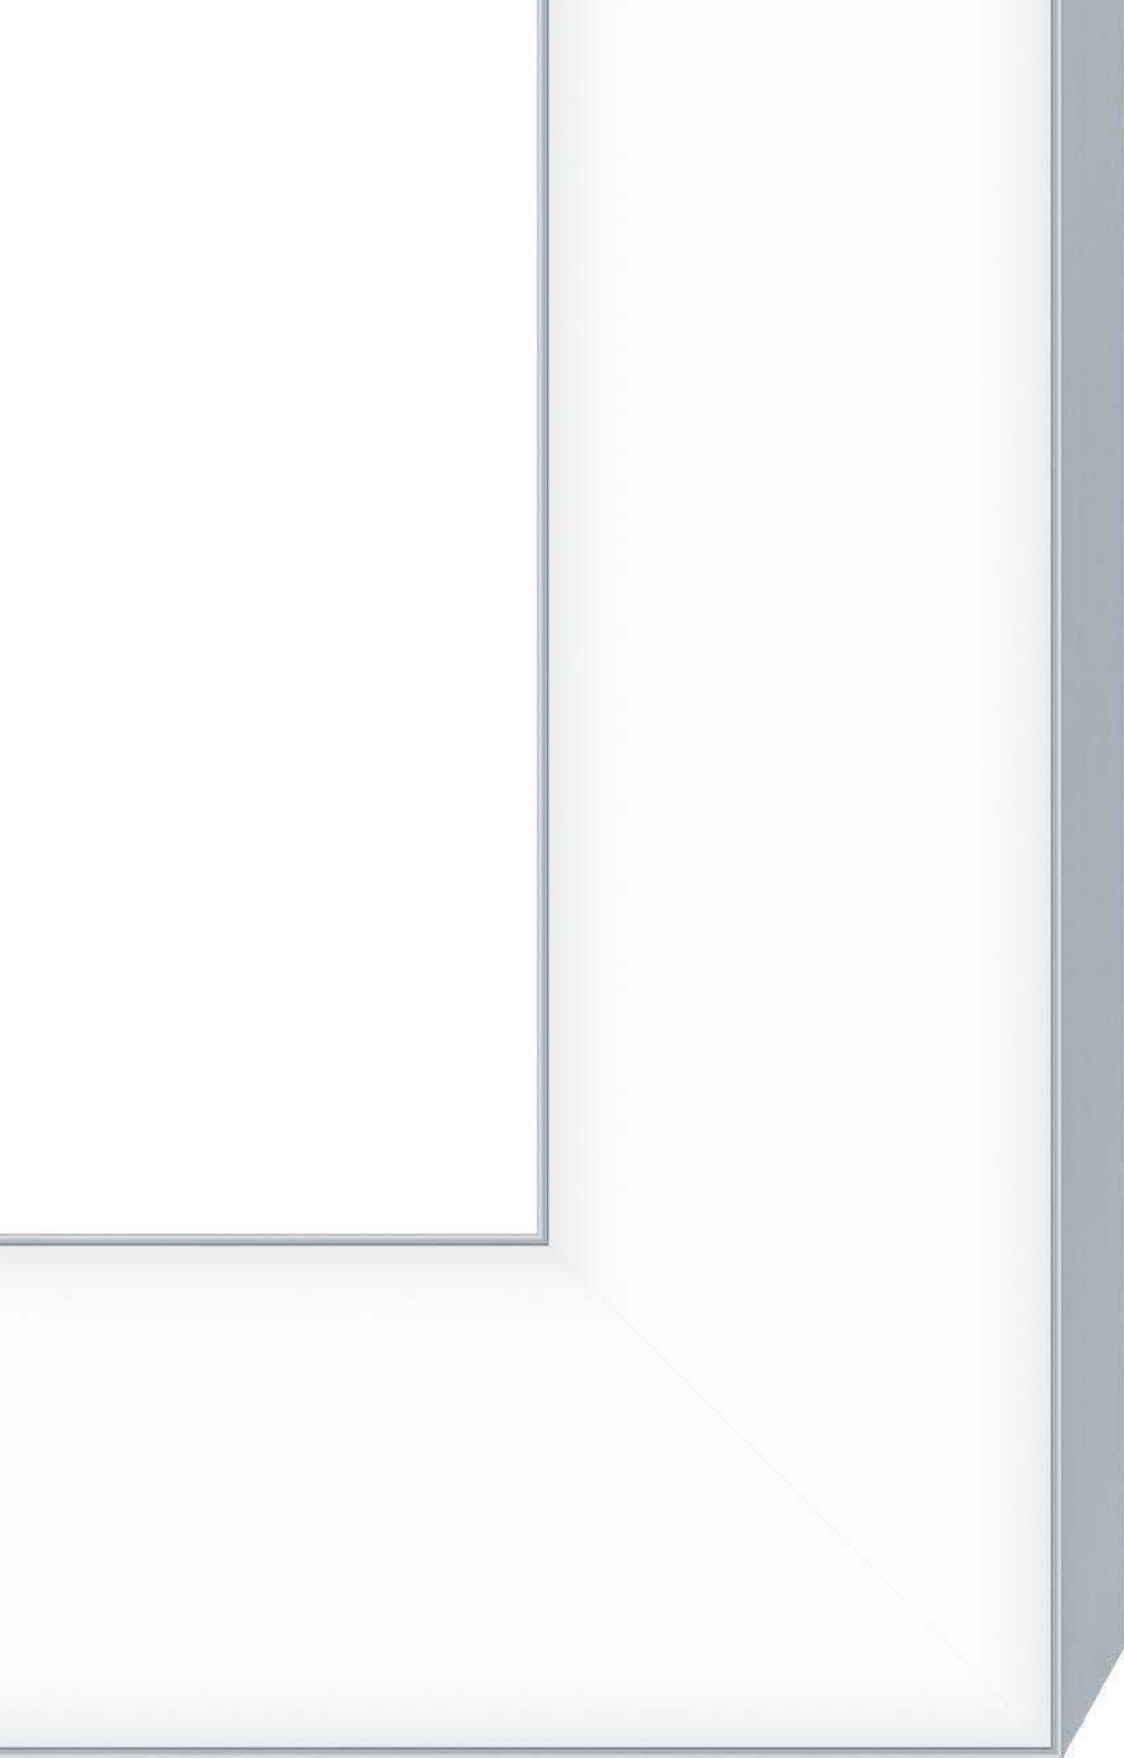


SLOTLIGHT II
Perfectly illuminated - even round the corner.

SLOTLIGHT II

From entrance area to executive's office

Luminaires with architectural styling are often reputed to neglect light output ratio and efficiency. This accusation cannot be levelled at SLOTLIGHT II. Even its standard optic achieves a light output ratio in excess of 50 %. Fitted with a Luminance Reducing Optic (LRO), this luminaire can even be used above office workstations. This enables SLOTLIGHT II to produce perfect lighting conditions without annoying reflections on screens. Light lines can be arranged freely anywhere in the room regardless of the position of the workstation.



SLOTLIGHT II with opal optic
The lighting unit distributes diffuse light uniformly throughout the room.



LRO optic

With its Luminance Reducing Optic (LRO),
SLOTLIGHT II provides extra scope for creative design.

SLOTLIGHT II

T16

Soothingly pure light in uniformly illuminated lines makes SLOTLIGHT II the perfect design feature. Instead of displaying a luminaire unit, the new light line focuses on providing an outstanding lighting effect. Tetris technology and a separate white-painted sheet steel reflector provide pleasantly uniform light distribution. The flow of the light line is barely interrupted by any distracting dark shadows thanks to Tetris technology and the overlapping arrangement of the T16 light sources. The precision-machined diffuser compensates for any linear fluctuations due to temperature, and prevents any dark spots along the light line. The result: pure light, all the way down the line.



Tetris technology:


The intelligent arrangement of T16 fluorescent lamps produces pleasantly uniform light. In order to obtain optimum results in this respect, we recommend to observe the notes on lamp configuration below.




Lamp configurations

Vertical or horizontal direction of a luminaire or light ribbon.

- A:** 1-length
- B:** 2-length
- C:** 3-length and multiple length

 The blue field in the diagrams represents the respective manufacturer's imprint.

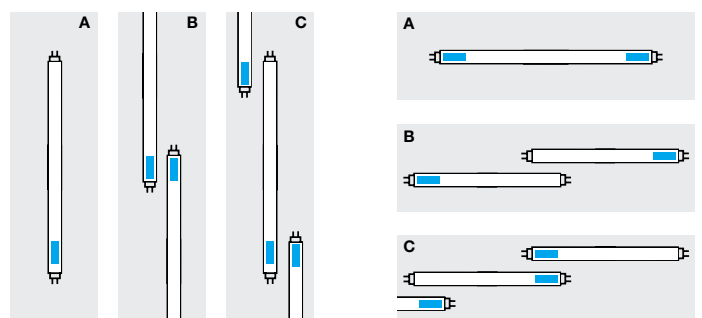

In order to ensure optimum operation of the T16 light source, we recommend to use it at 100 % for the first 100 hours of operation. Over its whole service life, the lamp should be used at 100 % repeatedly.

SLOTLIGHT II LED

Design meets efficiency

Flexible uniformity at the highest level: SLOTLIGHT II LED escapes the restrictions of the T16 lamp by using LED lighting points that can have any spacing pitch. Luminaire lengths in 300 mm increments give the light line enormous flexibility. The visual benefit: the continuous-row system is illuminated absolutely uniformly from beginning to end - with no noticeable distracting shadows near joints or in corners. With an efficiency in excess of 92 lm/W and 1 500 lm per running meter, SLOTLIGHT II LED is a role model in terms of economic efficiency, too. A service life of 50,000 hours is another plus point of this maintenance-free LED luminaire. The entire portfolio is available as a surface-mounted, recessed and pendant luminaire, with IP 54 protection, and the light line is available in two light colours (3000 K and 4000 K).



Design freedom: SLOTLIGHT II LED is available in **300mm** length increments.




0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17

92 lm/W SLOTLIGHT II LED

41 lm/W SLOTLIGHT II T16

Extremely efficient

Compared with a T16 continuous-row system with 41 lm/W, SLOTLIGHT II LED boasts an impressive increase in efficiency of 51 lm/W or more.

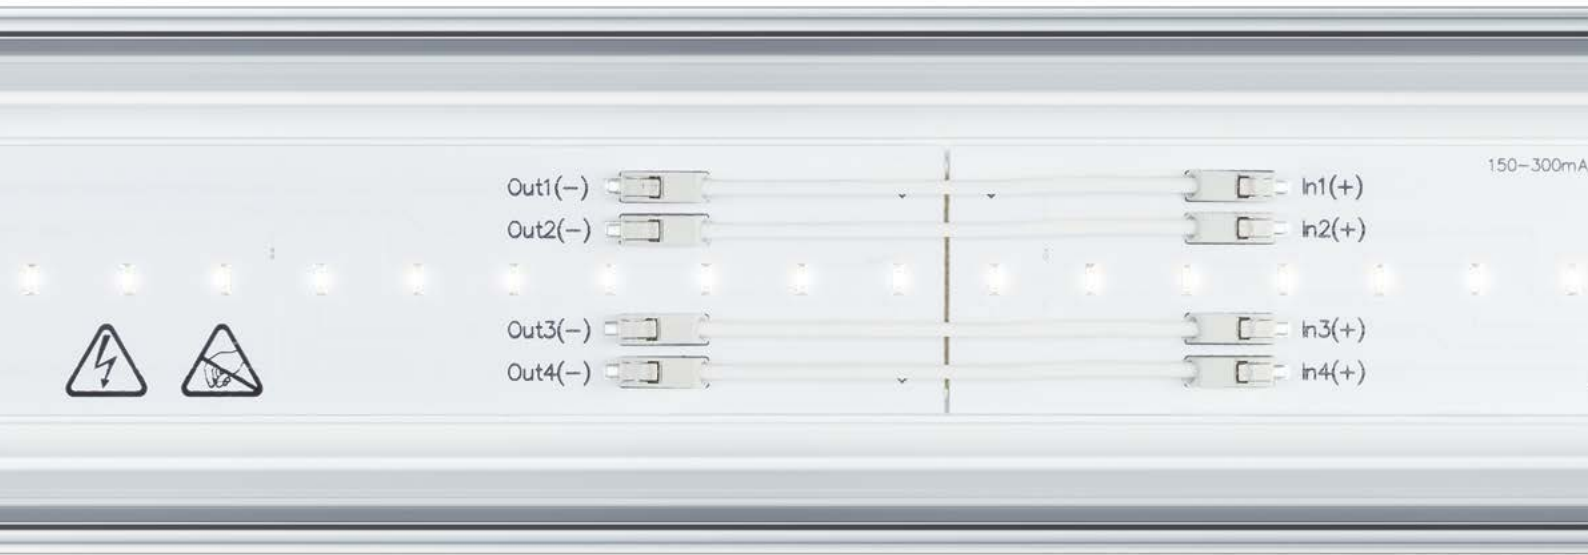

Boundless light

SLOTLIGHT II leads outdoors

SLOTLIGHT II light lines can even cope with the special conditions encountered in sheltered outdoor areas – their IP54 protection guarantees protection against splashing water and dust. This improves the strength and service life of the luminaire and also makes it possible to provide continuity between lighting for indoor areas and lighting for outdoor areas. SLOTLIGHT II with IP54 protection is supplied as a preassembled individual luminaire available in three different lengths. Plastic end caps provide a tight seal which ensures reliable protection against insects and splashing water. All this plus a major technical lighting benefit: the luminaire's innovative hollow-chamber system makes sure that, despite all the precautions taken to ensure extra protection, the linear, uniform look of the luminaire is not compromised at all.



SLOTLIGHT II with IP 54 protection

SLOTLIGHT II masterfully provides a lighting link between indoors and outdoors in exemplary fashion: as a ready-to-mount individual luminaire, SLOTLIGHT II IP54 is absolutely splash-proof and dust-proof without compromising on luminosity.



Degrees of protection for technical luminaires

First number protection against solid objects

IP0X	No protection against solid objects
IP1X	Protected against solid objects over 50 mm
IP2X	Protected against solid objects over 12 mm
IP3X	Protected against solid objects over 2.5 mm
IP4X	Protected against solid objects over 1 mm
IP5X	Protected against dust (limited ingress)
IP6X	Totally protected against dust (no ingress of dust)

Second number protection against liquids

IPX0	No protection against liquids
IPX1	Protected against water falling vertically
IPX2	Protected against direct sprays up to 15° from vertical
IPX3	Protected against direct sprays up to 60° from vertical
IPX4	Protected against sprays from all directions
IPX5	Protected against low-pressure jets of water
IPX6	Protected against strong jets of water (acceptable for use on ship decks)
IPX7	Protected against the effects of immersion (specified pressure and time)
IPX8	Protected against long periods of immersion under pressure (see manufacturer's instructions)

Example IP23

IP	2	3
INGRESS PROTECTION		
	Protection against ingress of solid objects having a $\varnothing < 12$ mm (medium-sized foreign bodies). Keep fingers and objects away.	
		Protection against water drops falling up to 60° from vertical. There must be no damaging effect (spraying water).



Recommendations according to **application area**

	SLOTLIGHT II
Damp locations	
Bake houses	•
Damp cellars	•
Canteen kitchens	-
Motor vehicle manufacturing workshops	•
Warehouses/depots	•
Changing rooms	•
Lavatories	•
Wet locations	
Beer and wine cellars	•
Breweries	•
Wine cellars (using sulphur to steam out barrels)	-
Meat packaging plants	-
Rooms or areas in bathhouses or washhouses	•
Bathrooms/shower rooms	•
Swimming pools/baths - ozone water treatment	•
Swimming pools/baths - chlorine water treatment	-
Thermal spas and brine baths	•
Agricultural premises	
Fodder preparation	•
Greenhouses	•
Storage areas/storerooms for hay, straw, fodder, fertilisers	•
Locations exposed to the fire hazards (only version with electronic ballast is fire-resistant)	
Wood working	•
Paper processing	-
Textile processing plants	-
Theatre workshops	•
Dry locations	•
Garages	•
Underground car parks	•
Multi-storey car parks	•
Private garages	•
Vehicle depots	•
Outdoor facilities	
Facilities on ramps (roofed)	•
Gateways (roofed)	•
Roofed railway platforms	•
Roofed petrol stations	•
Canopy roofs	•

- Suitable
- Unsuitable

The effects of chemicals on materials

	PMMA	Anodised aluminium
Acetone	-	+
Benzene	-	+
Fats		
Mineral	+	+
Vegetable	+	+
Animal	+	-
Silicone oil	•	+
Chloroform	-	+
Diesel fuel	+	-
Ethyl alcohol		
< 30 %	•	+
> 30 %	-	+
Ethyl acetate	-	+
Glycerol	+	+
Fuel oil	•	+
Isopropyl alcohol	-	+
Caustic potash solution 30 %	+	-
Cresol	-	+
Methyl alcohol	-	+
Regular petrol	-	+
HCl (hydrochloric acid)		
< 20 %	+	-
> 20 %	+	-
Sulphuric acid (H₂SO₄)		
< 50 %	+	-
< 70 %	•	-
> 70 %	-	-
> 98 %	-	-
Four-star petrol	-	+
Toluene	-	+
Trichloroethane	-	+
Dimethylbenzene	-	+


- Resistant to limited extent
- + Resistant
- Not resistant

SLOTLIGHT II

The minimalist light line that sets the stage


Colours evoke emotions. Colours focus attention and create accents. Coloured light can also divide rooms up or produce a sense of identity. A carefully chosen appropriate light colour and harmoniously coordinated colour sequences are therefore a smart way of setting a mood. They tap into human feelings, sensitivities and experience. This is why Zumtobel relies on LED technology and the unique LITECOM control system for SLOTLIGHT II as well. SLOTLIGHT II is fitted with a DALI ballast and can be integrated into a DALI system. Individually addressed luminaires can be split up into groups flexibly. The payoff is the ability to adjust lighting scenes precisely to suit various times of day and activities, even across several rooms. This also makes evening inspection rounds superfluous because the lighting can be switched off throughout an entire building at the press of a button.

LITECOM

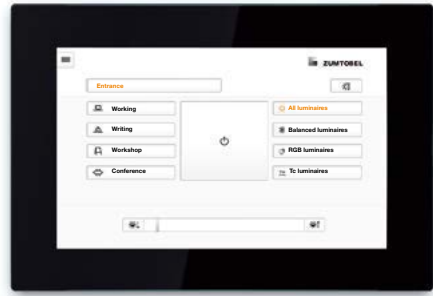

Control system

Changing colours, personalising colour sequences and exploiting potential energy savings: a professional lighting control system combines all this with convenient operation. Automatic functions that dim luminaires depending on a particular activity or available amounts of daylight and switch them off where possible bring an enormous improvement in efficiency.

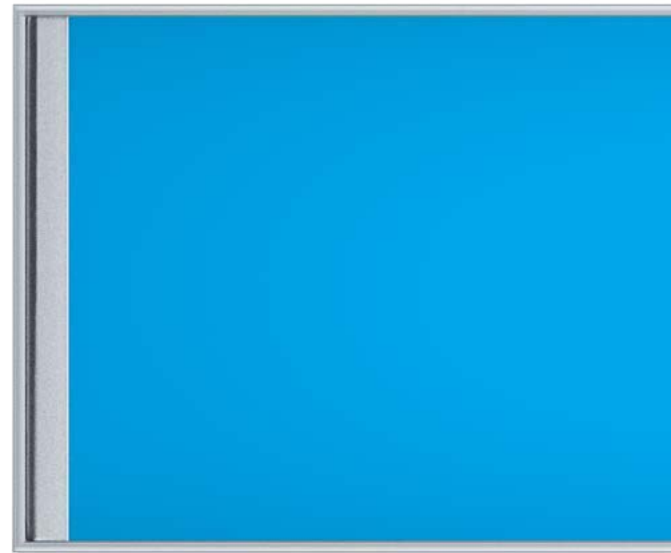



Community centre, Ludesch / AT
SLOTLIGHT II recessed luminaire
Architect: DI H. Kaufmann ZT GmbH






VHV, Hanover / DE
SLOTLIGHT II recessed luminaire
Architect: Architekten BKSP



Ullens Center for Contemporary Art, Beijing / CN
SLOTLIGHT II recessed luminaire
Architect: Wilmotte et Associés, Paris/FR

Installation SLOTLIGHT II LED recessed luminaire

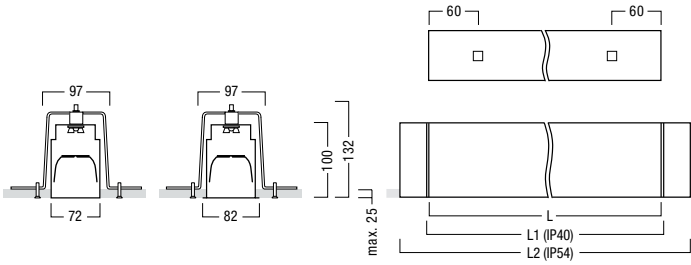

□ Possible feed-in point (luminaire)

Please note: when luminaire is operated, extruded aluminium section must be expected to expand due to heat by up to 0.7 mm per running metre!


	L _K	L ₁	L ₂	L _{LB}
10 W	606	611		
15 W	906	911		
19 W	1206	1211	1253	
24 W	1506	1511	1553	
30 W	1806	1811	1853	
34 W	2106	2111	2153	
39 W	2406	2411	2453	
49 W	3006	3011	3053	
59 W	3606	3611	3653	
69 W	4206	4211	4253	
74 W	4506	4511	4553	4500

E.g. light line (15011 mm):


3 continuous row channel (4500 mm) + 1 channel as end piece (1506 mm) + 10 x 24 W L 1500 LED batten + ET Set 5.5



Corner luminaire
without FRAME with FRAME



Installation SLOTLIGHT II LED Surface-mounted and pendant luminaires

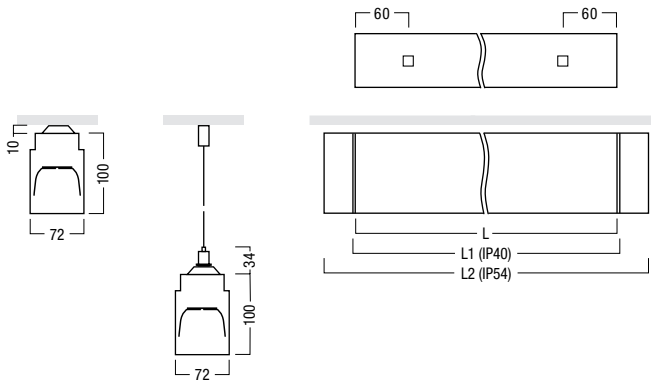

□ Possible feed-in point (luminaire)

When pendant-mounted, maximum spacings 2.5 m.

Please note: when luminaire is operated, extruded aluminium section must be expected to expand due to heat by up to 0.7 mm per running metre!


	L _K	L ₁	L ₂	L _{LB}
10 W	606	611		
15 W	906	911		
19 W	1206	1211	1253	
24 W	1506	1511	1553	
30 W	1806	1811	1853	
34 W	2106	2111	2153	
39 W	2406	2411	2453	
49 W	3006	3011	3053	
59 W	3606	3611	3653	
69 W	4206	4211	4253	
74 W	4506	4511	4553	4500



E.g. light line (15011 mm):

3 continuous row channel (4500 mm) + 1 channel as end piece (1506 mm) + 10 x 24 W L 1500 LED batten + ET Set 5.5

Corner luminaire



[...] Shared properties SLOTLIGHT II individual luminaires

- Extruded aluminium section in a natural anodised finish
- PMMA diffuser made of opal Plexiglas with diffusely patterned outer surface designed to make the luminaire appear uniformly bright over practically 100% of the surface
- Colour temperature 4000 K (neutral white) and 3000 K (warm white)
- Colour rendering index: Ra > 80
- Chromaticity tolerance between multiple luminaires of up to 3 MacAdam ellipses
- LED service life: 50,000 h before luminous flux drops to 80 % of initial level
- Luminaire pre-wired using halogen-free leads


SLOTLIGHT II LED single luminaire in IP40 degree of protection



- [...]
- LRO optic for reduced luminance and impression of homogenous illumination, designed to minimise the luminance level in the upper, flat angle range
- Continuous LRO optic, up to 1500 mm in length, for reduced luminance
- Die-cast aluminium end cap set in silver-look finish, including 2 fixing screws
- Gear tray, wiring and end-cap set included in pack

	L/W/H	kg	Order no.
LED light line PMMA IP40 in 3000 K light colour			
<i>dimmmable Dali only</i>			
10 W LED 830 L611	611/72/100	2,1	42 182 231
15 W LED 830 L911	911/72/100	3,0	42 182 239
19 W LED 830 L1211	1211/72/100	4,0	42 182 247
24 W LED 830 L1511	1511/72/100	5,0	42 182 257
30 W LED 830 L1811	1811/72/100	6,0	42 182 267
34 W LED 830 L2111	2111/72/100	7,0	42 182 277
39 W LED 830 L2411	2411/72/100	8,5	42 182 287
49 W LED 830 L3011	3011/72/100	10,0	42 182 297
59 W LED 830 L3611	3611/72/100	12,0	42 182 307
69 W LED 830 L4211	4211/72/100	14,0	42 182 317
74 W LED 830 L4511	4511/72/100	16,0	42 182 327
LED light line PMMA IP40 in 4000 K light colour			
<i>dimmmable Dali only</i>			
10 W LED 840 L611	611/72/100	2,1	42 182 235
15 W LED 840 L911	911/72/100	3,0	42 182 243
19 W LED 840 L1211	1211/72/100	4,0	42 182 252
24 W LED 840 L1511	1511/72/100	5,0	42 182 262
30 W LED 840 L1811	1811/72/100	6,0	42 182 272
34 W LED 840 L2111	2111/72/100	7,0	42 182 282
39 W LED 840 L2411	2411/72/100	8,5	42 182 292
49 W LED 840 L3011	3011/72/100	10,0	42 182 302
59 W LED 840 L3611	3611/72/100	12,0	42 182 312
69 W LED 840 L4211	4211/72/100	14,0	42 182 322
74 W LED 840 L4511	4511/72/100	16,0	42 182 332
LED light line LRO IP40 in 3000 K light colour			
<i>dimmmable Dali only</i>			
10 W LED 830 L611 <i>eco*</i>	611/72/100	2,1	42 182 230
15 W LED 830 L911 <i>eco*</i>	911/72/100	3,0	42 182 238
19 W LED 830 L1211 <i>eco*</i>	1211/72/100	4,0	42 182 246
24 W LED 830 L1511 <i>eco*</i>	1511/72/100	5,0	42 182 256
30 W LED 830 L1811 <i>eco*</i>	1811/72/100	6,0	42 182 266
34 W LED 830 L2111 <i>eco*</i>	2111/72/100	7,0	42 182 276
39 W LED 830 L2411 <i>eco*</i>	2411/72/100	8,5	42 182 286
49 W LED 830 L3011 <i>eco*</i>	3011/72/100	10,0	42 182 296
59 W LED 830 L3611 <i>eco*</i>	3611/72/100	12,0	42 182 306
69 W LED 830 L4211 <i>eco*</i>	4211/72/100	14,0	42 182 316
74 W LED 830 L4511 <i>eco*</i>	4511/72/100	16,0	42 182 326
LED light line LRO IP40 in 4000 K light colour			
<i>dimmmable Dali only</i>			
10 W LED 840 L611 <i>eco*</i>	611/72/100	2,1	42 182 234
15 W LED 840 L911 <i>eco*</i>	911/72/100	3,0	42 182 242
19 W LED 840 L1211 <i>eco*</i>	1211/72/100	4,0	42 182 251
24 W LED 840 L1511 <i>eco*</i>	1511/72/100	5,0	42 182 261
30 W LED 840 L1811 <i>eco*</i>	1811/72/100	6,0	42 182 271
34 W LED 840 L2111 <i>eco*</i>	2111/72/100	7,0	42 182 281
39 W LED 840 L2411 <i>eco*</i>	2411/72/100	8,5	42 182 291
49 W LED 840 L3011 <i>eco*</i>	3011/72/100	10,0	42 182 301
59 W LED 840 L3611 <i>eco*</i>	3611/72/100	12,0	42 182 311
69 W LED 840 L4211 <i>eco*</i>	4211/72/100	14,0	42 182 321
74 W LED 840 L4511 <i>eco*</i>	4511/72/100	16,0	42 182 331
LED light line in IP40 degree of protection			
<i>electronic</i>			
45 W LED RGB L1511	1511/72/100	4,0	42 181 394

Please order recessed-mount installation accessories separately.

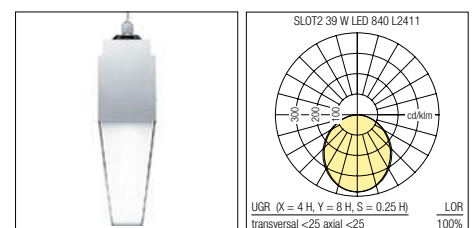


SLOTLIGHT II LED single luminaire in IP40 degree of protection with surround



- [...]
 - Extruded aluminium section with 5 mm surround in natural anodised finish
 - Luminaire comprises housing and continuous opal optic made of PMMA or an LRO optic (for reducing the luminance)
 - LRO optic for reduced luminance and impression of homogenous illumination, designed to minimise the luminance level in the upper, flat angle range
 - Continuous LRO optic, up to 1500 mm in length, for reduced luminance
 - Die-cast aluminium end cap set in silver-look finish, including 2 fixing screws
 - Gear tray, wiring and end-cap set included in pack

	L/W/H	kg	Order no.
LED light line PMMA IP40 in 3000 K light colour			
<i>dimnable Dali only</i>			
10 W LED 830 L611 FRAME	611/72/100	2,1	42 182 228
15 W LED 830 L911 FRAME	911/72/100	3,0	42 182 236
19 W LED 830 L1211 FRAME	1211/72/100	4,0	42 182 244
24 W LED 830 L1511 FRAME	1511/72/100	5,0	42 182 254
30 W LED 830 L1811 FRAME	1811/72/100	6,0	42 182 264
34 W LED 830 L2111 FRAME	2111/72/100	7,0	42 182 274
39 W LED 830 L2411 FRAME	2411/72/100	8,5	42 182 284
49 W LED 830 L3011 FRAME	3011/72/100	10,0	42 182 294
59 W LED 830 L3611 FRAME	3611/72/100	12,0	42 182 304
69 W LED 830 L4211 FRAME	4211/72/100	14,0	42 182 314
74 W LED 830 L4511 FRAME	4511/72/100	16,0	42 182 324
LED light line PMMA IP40 in 4000 K light colour			
<i>dimnable Dali only</i>			
10 W LED 840 L611 FRAME	611/72/100	2,1	42 182 232
15 W LED 840 L911 FRAME	911/72/100	3,0	42 182 240
19 W LED 840 L1211 FRAME	1211/72/100	4,0	42 182 249
24 W LED 840 L1511 FRAME	1511/72/100	5,0	42 182 259
30 W LED 840 L1811 FRAME	1811/72/100	6,0	42 182 269
34 W LED 840 L2111 FRAME	2111/72/100	7,0	42 182 279
39 W LED 840 L2411 FRAME	2411/72/100	8,5	42 182 289
49 W LED 840 L3011 FRAME	3011/72/100	10,0	42 182 299
59 W LED 840 L3611 FRAME	3611/72/100	12,0	42 182 309
69 W LED 840 L4211 FRAME	4211/72/100	14,0	42 182 319
74 W LED 840 L4511 FRAME	4511/72/100	16,0	42 182 329
LED light line LRO IP40 in 3000 K light colour			
<i>dimnable Dali only</i>			
10 W LED 830 L611 FRAME <i>eco*</i>	611/72/100	2,1	42 182 229
15 W LED 830 L911 FRAME <i>eco*</i>	911/72/100	3,0	42 182 237
19 W LED 830 L1211 FRAME <i>eco*</i>	1211/72/100	4,0	42 182 245
24 W LED 830 L1511 FRAME <i>eco*</i>	1511/72/100	5,0	42 182 255
30 W LED 830 L1811 FRAME <i>eco*</i>	1811/72/100	6,0	42 182 265
34 W LED 830 L2111 FRAME <i>eco*</i>	2111/72/100	7,0	42 182 275
39 W LED 830 L2411 FRAME <i>eco*</i>	2411/72/100	8,5	42 182 285
49 W LED 830 L3011 FRAME <i>eco*</i>	3011/72/100	10,0	42 182 295
59 W LED 830 L3611 FRAME <i>eco*</i>	3611/72/100	12,0	42 182 305
69 W LED 830 L4211 FRAME <i>eco*</i>	4211/72/100	14,0	42 182 315
74 W LED 830 L4511 FRAME <i>eco*</i>	4511/72/100	16,0	42 182 325
LED light line LRO IP40 in 4000 K light colour			
<i>dimnable Dali only</i>			
10 W LED 840 L611 FRAME <i>eco*</i>	611/72/100	2,1	42 182 233
15 W LED 840 L911 FRAME <i>eco*</i>	911/72/100	3,0	42 182 241
19 W LED 840 L1211 FRAME <i>eco*</i>	1211/72/100	4,0	42 182 250
24 W LED 840 L1511 FRAME <i>eco*</i>	1511/72/100	5,0	42 182 260
30 W LED 840 L1811 FRAME <i>eco*</i>	1811/72/100	6,0	42 182 270
34 W LED 840 L2111 FRAME <i>eco*</i>	2111/72/100	7,0	42 182 280
39 W LED 840 L2411 FRAME <i>eco*</i>	2411/72/100	8,5	42 182 290
49 W LED 840 L3011 FRAME <i>eco*</i>	3011/72/100	10,0	42 182 300
59 W LED 840 L3611 FRAME <i>eco*</i>	3611/72/100	12,0	42 182 310
69 W LED 840 L4211 FRAME <i>eco*</i>	4211/72/100	14,0	42 182 320
74 W LED 840 L4511 FRAME <i>eco*</i>	4511/72/100	16,0	42 182 330

Please order recessed-mount installation accessories separately.




SLOTLIGHT II LED single luminaire in IP54 degree of protection



- [...]
 - Plastic end-cap set in silver-look finish
 - Luminaire comprises housing, continuous opal PMMA optic, gear tray, wiring and end-cap set

	L/W/H	kg	Order no.
IP54 LED light line in light colour 3000 K			
			<i>dimnable Dali only</i>
19 W LED 830 L1253	1253/72/100	4,0	42 182 248
24 W LED 840 L1553	1553/72/100	5,0	42 182 258
26 W LED 830 L2153	2153/72/100	7,0	42 182 278
30 W LED 840 L1853	1853/72/100	6,0	42 182 268
39 W LED 830 L2453	2453/72/100	8,5	42 182 288
49 W LED 830 L3053	3053/72/100	10,0	42 182 298
59 W LED 830 L3653	3653/72/100	12,0	42 182 308
69 W LED 830 L4253	4253/72/100	14,0	42 182 318
74 W LED 830 L4553	4553/72/100	16,0	42 182 328
IP54 LED light line in light colour 4000 K			
			<i>dimnable Dali only</i>
19 W LED 840 L1253	1253/72/100	4,0	42 182 253
24 W LED 830 L1553	1553/72/100	5,0	42 182 263
26 W LED 840 L2153	2153/72/100	7,0	42 182 283
30 W LED 830 L1853	1853/72/100	6,0	42 182 273
39 W LED 840 L2453	2453/72/100	8,5	42 182 293
49 W LED 840 L3053	3053/72/100	10,0	42 182 303
59 W LED 840 L3653	3653/72/100	12,0	42 182 313
69 W LED 840 L4253	4253/72/100	14,0	42 182 323
74 W LED 840 L4553	4553/72/100	16,0	42 182 333

Please order recessed-mount installation accessories separately.

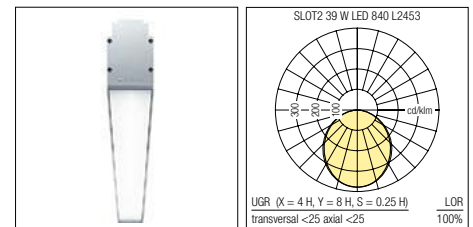


SLOTLIGHT II LED corner luminaire



- Extruded aluminium section in a natural anodised finish, mitred
- Colour temperature 4000 K (neutral white) and 3000 K (warm white)
- Colour rendering index: Ra > 80
- Chromaticity tolerance between multiple luminaires of up to 3 MacAdam ellipses
- LED service life: 50,000 h before luminous flux drops to 80 % of initial level
- Through-wiring used to connect luminaires
- Homogeneous appearance
- Luminaire comprises housing and PMMA optic with mitred edges
- Fixing clip set required for installing in plasterboard
- Luminaire pre-wired using halogen-free leads
- Not suitable for recessing in concrete

	L/W/H	kg	Order no.
LED corner luminaire in light colour 3000 K			
			<i>dimnable Dali only</i>
15 W LED 830 L520	520/520/100	5,0	42 182 334
15 W LED 830 L525 FRAME	525/525/100	5,0	42 182 335
LED corner luminaire in light colour 4000 K			
			<i>dimnable Dali only</i>
15 W LED 840 L520	520/520/100	5,0	42 182 336
19 W LED 840 L525 FRAME	525/525/100	5,0	42 182 337

Please order recessed-mount installation accessories separately.



SLOTLIGHT II LED channel

- Extruded aluminium section in natural anodised finish, includes PMMA optic
- PMMA diffuser made of opal Plexiglas with diffusely patterned outer surface designed to make the luminaire appear uniformly bright over practically 100% of the surface
- LRO optic for reduced luminance and impression of homogenous illumination, designed to minimise the luminance level in the upper, flat angle range
- Continuous LRO optic, up to 1500 mm in length, for reduced luminance
- Two holes of diameter 20 mm provided on rear of each trunking section for electrical feed
- Maximum spacing 2.5 m
- Suitable for installation as recessed, surface-mounted or suspended luminaire

Channel for LED light line PMMA

	L/W/H	kg	Order no.
L606 PMMA	606/72/100	1,2	22 168 717
L906 PMMA	906/72/100	1,8	22 168 718
L1206 PMMA	1206/72/100	2,4	22 168 719
L1506 PMMA	1506/72/100	3,0	22 168 720
L1806 PMMA	1806/72/100	3,6	22 168 721
L2106 PMMA	2106/72/100	4,2	22 168 722
L2406 PMMA	2406/72/100	5,0	22 168 723
L3006 PMMA	3006/72/100	6,0	22 168 724
L3606 PMMA	3606/72/100	7,2	22 168 725
L4206 PMMA	4206/72/100	8,4	22 168 726
L4500 PMMA LB	4500/72/100	9,0	22 168 764
L4506 PMMA	4506/72/100	9,0	22 168 727

Channel for LED light line LRO

	L/W/H	kg	Order no.
L606 LRO	606/72/100	1,2	22 168 890
L906 LRO	906/72/100	1,8	22 168 891
L1206 LRO	1206/72/100	2,4	22 168 892
L1506 LRO	1506/72/100	3,0	22 168 893
L1806 LRO	1806/72/100	3,6	22 168 894
L2106 LRO	2106/72/100	4,2	22 168 895
L2406 LRO	2406/72/100	5,0	22 168 896
L3006 LRO	3006/72/100	6,0	22 168 897
L3606 LRO	3606/72/100	7,2	22 168 898
L4206 LRO	4206/72/100	8,4	22 168 899
L4506 LRO	4506/72/100	9,0	22 168 900

Channel for LED-Lightline RGB

L1506 RGB	1506/72/100	3,0	22 168 951
-----------	-------------	-----	------------

Please refer to diagram for order handling and configuring a continuous row system. Continuous-row luminaire, wiring, end cap set and installation accessories must be ordered separately.

**SLOTLIGHT II LED channel with surround**

- Extruded aluminium section in natural anodised finish, includes PMMA optic
- PMMA diffuser made of opal Plexiglas with diffusely patterned outer surface designed to make the luminaire appear uniformly bright over practically 100% of the surface
- LRO optic for reduced luminance and impression of homogenous illumination, designed to minimise the luminance level in the upper, flat angle range
- Continuous LRO optic, up to 1500 mm in length, for reduced luminance
- Two holes of diameter 20 mm provided on rear of each trunking section for electrical feed
- Maximum spacing 2.5 m
- Suitable for installation as recessed luminaire
- Aluminium channel optionally available with or without surround

Channel for LED lightline PMMA with surround

	L/W/H	kg	Order no.
L606 PMMA FRAME	606/72/100	1,2	22 168 901
L906 PMMA FRAME	906/72/100	1,8	22 168 902
L1206 PMMA FRAME	1206/72/100	2,4	22 168 903
L1506 PMMA FRAME	1506/72/100	3,0	22 168 904
L1806 PMMA FRAME	1806/72/100	3,6	22 168 905
L2106 PMMA FRAME	2106/72/100	4,2	22 168 906
L2406 PMMA FRAME	2406/72/100	5,0	22 168 907
L3006 PMMA FRAME	3006/72/100	6,0	22 168 908
L3606 PMMA FRAME	3606/72/100	7,2	22 168 909
L4206 PMMA FRAME	4206/72/100	8,4	22 168 910
L4500 PMMA FRAME LB	4500/72/100	9,0	22 168 936
L4506 PMMA FRAME	4506/72/100	9,0	22 168 911

Channel for LED light line LRO with surround

	L/W/H	kg	Order no.
L606 LRO FRAME	606/72/100	1,2	22 168 912
L906 LRO FRAME	906/72/100	1,8	22 168 913
L1206 LRO FRAME	1206/72/100	2,4	22 168 914
L1506 LRO FRAME	1506/72/100	3,0	22 168 915
L1806 LRO FRAME	1806/72/100	3,6	22 168 916
L2106 LRO FRAME	2106/72/100	4,2	22 168 917
L2406 LRO FRAME	2406/72/100	5,0	22 168 918
L3006 LRO FRAME	3006/72/100	6,0	22 168 919
L3606 LRO FRAME	3606/72/100	7,2	22 168 920
L4206 LRO FRAME	4206/72/100	8,4	22 168 921
L4506 LRO FRAME	4506/72/100	9,0	22 168 922

Channel for LED-Lightline RGB

L1506 RGB	1506/72/100	3,0	22 168 951
-----------	-------------	-----	------------

SLOTLIGHT II LED batten



- Colour temperature 4000 K (neutral white) and 3000 K (warm white)
- Colour rendering index: Ra > 80
- Chromaticity tolerance between multiple luminaires of up to 3 MacAdam ellipses
- LED service life: 50,000 h before luminous flux drops to 80 % of initial level
- Aluminium gear tray
- Luminaire pre-wired using halogen-free leads

	L/W/H	kg	Order no.
Batten for LED light line in light colour 3000 K			
<i>dimnable Dali only</i>			
10 W LED 830 L600 TB IP40	600/72/100	0,9	42 182 339
10 W LED 830 L600 TB IP54 IP54	600/72/100	0,9	42 182 385
15 W LED 830 L900 TB IP40	900/72/100	1,2	42 182 343
15 W LED 830 L900 TB IP54 IP54	900/72/100	1,2	42 182 387
19 W LED 830 L1200 TB IP40	1200/72/100	1,6	42 182 347
19 W LED 830 L1200 TB IP54 IP54	1200/72/100	1,6	42 182 389
24 W LED 830 L1500 TB IP40	1500/72/100	2,1	42 182 351
24 W LED 830 L1500 TB IP54 IP54	1500/72/100	2,1	42 182 391
Batten for LED light line in light colour 4000 K			
<i>dimnable Dali only</i>			
10 W LED 840 L600 TB IP40	600/72/100	0,9	42 182 341
10 W LED 840 L600 TB IP54 IP54	600/72/100	0,9	42 182 386
15 W LED 840 L900 TB IP40	900/72/100	1,2	42 182 345
15 W LED 840 L900 TB IP54 IP54	900/72/100	1,2	42 182 388
19 W LED 840 L1200 TB IP40	1200/72/100	1,6	42 182 349
19 W LED 840 L1200 TB IP54 IP54	1200/72/100	1,6	42 182 390
24 W LED 840 L1500 TB IP40	1500/72/100	2,1	42 182 353
24 W LED 840 L1500 TB IP54 IP54	1500/72/100	2,1	42 182 392
Continuous-row luminaire batten for LED lightline in 3000 K light colour			
<i>dimnable Dali only</i>			
10 W LED 830 L600 IP40	600/72/100	0,9	42 182 338
15 W LED 830 L900 IP40	900/72/100	1,2	42 182 342
19 W LED 830 L1200 IP40	1200/72/100	1,6	42 182 346
24 W LED 830 L1500 IP40	1500/72/100	2,1	42 182 350
Continuous-row luminaire batten for LED lightline in 4000 K light colour			
<i>dimnable Dali only</i>			
10 W LED 840 L600 IP40	600/72/100	0,9	42 182 340
15 W LED 840 L900 IP40	900/72/100	1,2	42 182 344
19 W LED 840 L1200 IP40	1200/72/100	1,6	42 182 348
24 W LED 840 L1500 IP40	1500/72/100	2,1	42 182 352
Batten for continuous row luminaires for LED light line in RGB			
<i>dimnable Dali only</i>			
45 W LED RGB L1500 IP40	1500/72/100	2,1	42 181 902
Batten for single luminaires for LED light line in RGB			
<i>dimnable Dali only</i>			
45 W LED RGB L1500 TB IP40	1500/72/100	2,1	42 181 393



SLOTLIGHT II LED accessories

- For wiring multi-length units
- Continuous-row system through-wiring without conductor interfaces for greater electrical safety
- Heat-resistant up to 105 °C
- 3-phase circuits and 1 control circuit
- Only from the reel (number of luminaires required = number of through-wirings required)
- Suction cup for removing LED batten

	kg	Order no.
Through-wiring		
LED DV 7 x 1,50 mm ² 615 HGF	1,2	22 168 763
LED DV 7 x 1,50 mm ² 915 HGF	1,2	22 168 760
LED DV 7 x 1,50 mm ² 1215 HGF	1,2	22 168 761
LED DV 7 x 1,50 mm ² 1515 HGF	1,2	22 168 762
Accessory		
LED SUCTION CUP		24 160 577




SLOTLIGHT II LED end-cap set

- Made of die-cast aluminium in silver-look finish, including cover elements for concealing the end joint of the optic

	kg	Order no.
End caps		
LED ET SET 5,5	0,3	22 168 847
LED ET Set F	0,3	22 168 889





Installation SLOTLIGHT II recessed luminaire

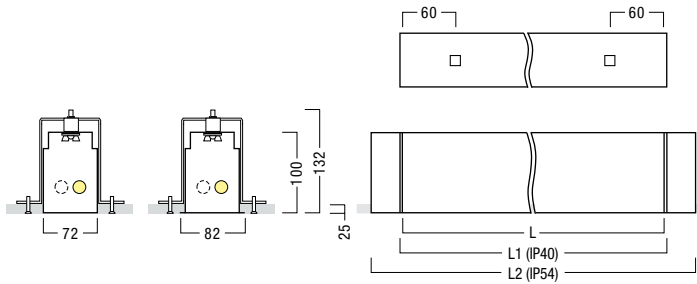

□ Possible feed-in point (luminaire)

	L	L ₁	L ₂	LLB
1/14/24	580	585	626	
1/21/39	880	885	926	
1/28/54	1180	1185	1226	
1/35/49	1480	1485	1526	
2 x 1/28/54	2250	2255	2296	
2 x 1/35/49	2850	2855	2896	
3 x 1/28/54	3320	3325	3366	3216
3 x 1/35/49	4220	4225	4266	4116

Please note: when luminaire is operated, extruded aluminium section must be expected to expand due to heat by up to 0.7 mm per running metre!



E.g. 9-length light line:
 9 : 3* = 2 x 3-length continuous row channels + one 3-length individual luminaire (as end piece) are required


3-length continuous row channels	3-length continuous row channels	3-length individual luminaire
----------------------------------	----------------------------------	-------------------------------

E.g. 11-length light line:
 11 : 3* = 3 x 3-length continuous row channels + one 2-length individual luminaire (as end piece) are required

3-length continuous row channels	3-length continuous row channels	3-length continuous row channels	2-length individual lum.
----------------------------------	----------------------------------	----------------------------------	--------------------------


* common feature: 3-length continuous row channel

Corner luminaire



For further design and installation advice please contact your local sales engineer.

Installation SLOTLIGHT II Surface-mounted and pendant luminaires


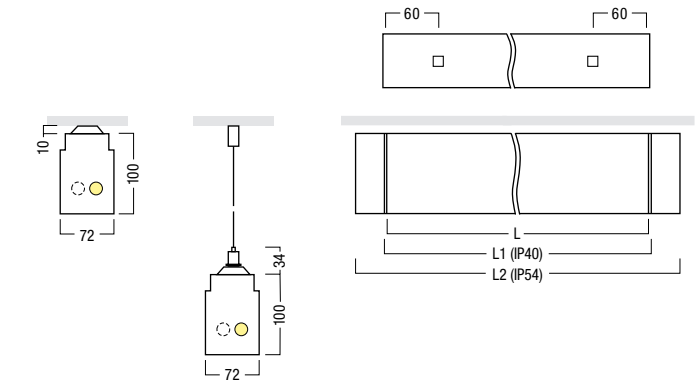


□ Possible feed-in point (luminaire)

When pendant-mounted, maximum spacings 2.5 m.

Please note: when luminaire is operated, extruded aluminium section must be expected to expand due to heat by up to 0.7 mm per running metre!

	L	L ₁	L ₂	LLB
1/14/24	580	585	626	
1/21/39	880	885	926	
1/28/54	1180	1185	1226	
1/35/49	1480	1485	1526	
2 x 1/28/54	2250	2255	2296	
2 x 1/35/49	2850	2855	2896	
3 x 1/28/54	3320	3325	3366	3216
3 x 1/35/49	4220	4225	4266	4116



E.g. 9-length light line:
 9 : 3* = 2 x 3-length continuous row channels + one 3-length individual luminaire (as end piece) are required


3-length continuous row channels	3-length continuous row channels	3-length individual luminaire
----------------------------------	----------------------------------	-------------------------------

E.g. 11-length light line:
 11 : 3* = 3 x 3-length continuous row channels + one 2-length individual luminaire (as end piece) are required

3-length continuous row channels	3-length continuous row channels	3-length continuous row channels	2-length individual lum.
----------------------------------	----------------------------------	----------------------------------	--------------------------

* common feature: 3-length continuous row channel

Corner luminaire



[...] Shared properties SLOTLIGHT II individual luminaires

- PMMA diffuser made of opal Plexiglas with diffusely patterned outer surface designed to make the luminaire appear uniformly bright over practically 100% of the surface
- Extruded aluminium section in a natural anodised finish
- Single-length luminaires are connected directly to gear tray
- Multi-length luminaires are connected using through-wiring system supplied
- Luminaire pre-wired using halogen-free leads
- 14/24 W luminaires only have Tetris on one side (first or last luminaire)
- "Dimmable DALI" luminaires are fitted with a DALI-controllable electronic ballast

SLOTLIGHT II single luminaire in IP40 degree of protection



- [...]
- Luminaire comprises housing and continuous opal optic made of PMMA or an LRO optic (for reducing the luminance)
- LRO optic for reduced luminance and impression of homogenous illumination, designed to minimise the luminance level in the upper, flat angle range
- Continuous LRO optic, up to 1500 mm in length, for reduced luminance
- Die-cast aluminium end cap set in silver-look finish, including 2 fixing screws
- Gear tray, wiring and end-cap set included in pack

	L/W/H	kg	Order no.	Order no.
1-length light line PMMA <i>electronic dimmable Dali</i>				
1/14 W T16	585/72/100	2,5	42 176 859	42 176 860
1/21 W T16	885/72/100	2,7	42 176 861	42 176 862
1/24 W T16	585/72/100	2,5	42 176 863	42 176 864
1/28 W T16	1185/72/100	3,4	42 176 865	42 176 866
1/35 W T16	1485/72/100	4,1	42 176 867	42 176 868
1/39 W T16	885/72/100	2,9	42 176 869	42 176 870
1/49 W T16	1485/72/100	4,1	42 176 871	42 176 872
1/54 W T16	1185/72/100	3,4	42 176 873	42 176 874
1-length light line LRO <i>electronic dimmable Dali</i>				
1/14 W T16	585/72/100	2,5	42 177 415	42 177 416
1/21 W T16	885/72/100	2,7	42 177 417	42 177 418
1/24 W T16	585/72/100	2,5	42 177 419	42 177 420
1/28 W T16	1185/72/100	3,4	42 177 421	42 177 422
1/35 W T16	1485/72/100	4,4	42 177 423	42 177 424
1/39 W T16	885/72/100	2,9	42 177 425	42 177 426
1/49 W T16	1485/72/100	4,1	42 177 427	42 177 428
1/54 W T16	1185/72/100	3,4	42 177 429	42 177 430
2-length light line PMMA <i>electronic dimmable Dali</i>				
1/28 W T16	2255/72/100	6,6	42 176 877	42 176 878
1/35 W T16	2855/72/100	8,1	42 176 879	42 176 880
1/49 W T16	2855/72/100	8,1	42 176 883	42 176 884
1/54 W T16	2255/72/100	6,6	42 176 885	42 176 886
2-length light line LRO <i>electronic dimmable Dali</i>				
1/28 W T16	2255/72/100	6,6	42 177 431	42 177 432
1/35 W T16	2855/72/100	8,1	42 177 433	42 177 434
1/49 W T16	2855/72/100	8,1	42 177 435	42 177 436
1/54 W T16	2255/72/100	6,6	42 177 437	42 177 438
3-length light line PMMA <i>electronic dimmable Dali</i>				
1/28 W T16	3325/72/100	10,3	42 176 889	42 176 890
1/35 W T16	4225/72/100	12,3	42 176 891	42 176 892
1/49 W T16	4225/72/100	12,3	42 176 895	42 176 896
1/54 W T16	3325/72/100	10,3	42 176 897	42 176 898
3-length light line LRO <i>electronic dimmable Dali</i>				
1/28 W T16	3325/72/100	10,3	42 177 439	42 177 440
1/35 W T16	4225/72/100	12,3	42 177 441	42 177 442
1/49 W T16	4225/72/100	12,3	42 177 443	42 177 444
1/54 W T16	3325/72/100	10,3	42 177 445	42 177 446

Please order mounting and suspension accessories separately.



SLOTLIGHT II single luminaire in IP40 degree of protection with surround

- [...]]
- Luminaire comprises housing and continuous opal optic made of PMMA or an LRO optic (for reducing the luminance)
- LRO optic for reduced luminance and impression of homogenous illumination, designed to minimise the luminance level in the upper, flat angle range
- Continuous LRO optic, up to 1500 mm in length, for reduced luminance
- Die-cast aluminium end cap set in silver-look finish, including 2 fixing screws
- Gear tray, wiring and end-cap set included in pack

	L/W/H	kg	Order no.	Order no.
1-length light line PMMA				
			<i>electronic dimmable Dali</i>	
1/14 W T16 FRAME	585/72/100	2,5	42 177 828	42 177 829
1/21 W T16 FRAME	885/72/100	2,7	42 177 830	42 177 831
1/24 W T16 FRAME	585/72/100	2,5	42 177 832	42 177 833
1/28 W T16 FRAME	1185/72/100	3,4	42 177 834	42 177 835
1/35 W T16 FRAME	1485/72/100	4,1	42 177 836	42 177 837
1/39 W T16 FRAME	885/72/100	2,9	42 177 838	42 177 839
1/49 W T16 FRAME	1485/72/100	4,1	42 177 840	42 177 841
1/54 W T16 FRAME	1185/72/100	3,4	42 177 842	42 177 843
2-length light line PMMA				
			<i>electronic dimmable Dali</i>	
1/28 W T16 FRAME	2255/72/100	6,6	42 177 844	42 177 845
1/35 W T16 FRAME	2855/72/100	8,1	42 177 846	42 177 847
1/49 W T16 FRAME	2855/72/100	8,1	42 177 848	42 177 849
1/54 W T16 FRAME	2255/72/100	6,6	42 177 850	42 177 851
3-length light line PMMA				
			<i>electronic dimmable Dali</i>	
1/28 W T16 FRAME	3325/72/100	10,3	42 177 852	42 177 853
1/35 W T16 FRAME	4225/72/100	12,3	42 177 854	42 177 855
1/49 W T16 FRAME	4225/72/100	12,3	42 177 856	42 177 857
1/54 W T16 FRAME	3325/72/100	10,3	42 177 858	42 177 859

Please order accessories for recessed mounting separately.

**SLOTLIGHT II single luminaire in IP54 degree of protection**

- [...]]
- Plastic end-cap set in silver-look finish
- Luminaire comprises housing, continuous opal PMMA optic, gear tray, wiring and end-cap set

	L/W/H	kg	Order no.	Order no.
Light ribbon, 1-length				
			<i>electronic dimmable Dali</i>	
1/14 W T16	626/72/100	2,5	42 176 901	42 176 902
1/21 W T16	926/72/100	2,7	42 176 903	42 176 904
1/24 W T16	626/72/100	2,5	42 176 905	42 176 906
1/28 W T16	1226/72/100	3,4	42 176 907	42 176 908
1/35 W T16	1526/72/100	4,1	42 176 909	42 176 910
1/39 W T16	926/72/100	2,9	42 176 911	42 176 912
1/49 W T16	1526/72/100	4,1	42 176 913	42 176 914
1/54 W T16	1226/72/100	3,4	42 176 915	42 176 916
Light ribbon, 2-length				
			<i>electronic dimmable Dali</i>	
1/28 W T16	2296/72/100	6,6	42 177 020	42 177 021
1/35 W T16	2896/72/100	8,1	42 177 022	42 177 023
1/49 W T16	2896/72/100	8,1	42 177 024	42 177 025
1/54 W T16	2296/72/100	6,6	42 177 026	42 177 027
Light ribbon, 3-length				
			<i>electronic dimmable Dali</i>	
1/28 W T16	3366/72/100	10,3	42 177 028	42 177 029
1/35 W T16	4266/72/100	12,3	42 177 030	42 177 031
1/49 W T16	4266/72/100	12,3	42 177 032	42 177 033
1/54 W T16	3366/72/100	10,3	42 177 034	42 177 035

Please order mounting and suspension accessories separately.



SLOTLIGHT II channel



- Extruded aluminium section in a natural anodised finish, includes PMMA optic or LRO optic for reduced luminance
- Aluminium channel for configuration as continuous ribbon of light (LB)
- PMMA diffuser made of opal Plexiglas with diffusely patterned outer surface designed to make the luminaire appear uniformly bright over practically 100% of the surface
- PMMA optic is continuous up to a length of 3 lamps
- LRO optic for reduced luminance and impression of homogenous illumination, designed to minimise the luminance level in the upper, flat angle range
- Continuous LRO optic, up to 1500 mm in length, for reduced luminance
- Two holes of diameter 20 mm provided on rear of each trunking section for electrical feed
- Maximum spacing 2.5 m
- Suitable for installation as recessed, surface-mounted or suspended luminaire
- Aluminium channel optionally available with or without surround

	L/W/H	kg	Order no.
1-length			
1/14/24 PMMA	580/72/100	1,3	22 161 845
1/21/39 PMMA	880/72/100	2,0	22 161 846
1/28/54 PMMA	1180/72/100	2,6	22 161 847
1/35/49 PMMA	1480/72/100	3,3	22 161 848
2-length			
1/28/54 PMMA	2250/72/100	4,6	22 161 849
1/35/49 PMMA	2850/72/100	5,9	22 161 850
3-length			
1/28/54 PMMA	3320/72/100	6,7	22 161 851
1/28/54 PMMA LB	3216/72/100	6,7	22 161 852
1/35/49 PMMA	4220/72/100	8,8	22 161 853
1/35/49 PMMA LB	4116/72/100	8,8	22 161 854
Corner luminaire			
EL 14/24 PMMA SET	507/507/100	2,1	22 161 983
EL 21/39 PMMA SET	807/807/100	2,5	22 161 984

For order handling and configuration of a continuous-row system, please refer to diagram. Please order continuous-row luminaire, wiring, end-cap set and installation accessories separately.



SLOTLIGHT II channel with surround



- Extruded aluminium section in a natural anodised finish, includes PMMA optic or LRO optic for reduced luminance
- Aluminium channel for configuration as continuous ribbon of light (LB)
- PMMA diffuser made of opal Plexiglas with diffusely patterned outer surface designed to make the luminaire appear uniformly bright over practically 100% of the surface
- PMMA optic is continuous up to a length of 3 lamps
- LRO optic for reduced luminance and impression of homogenous illumination, designed to minimise the luminance level in the upper, flat angle range
- Continuous LRO optic, up to 1500 mm in length, for reduced luminance
- Two holes of diameter 20 mm provided on rear of each trunking section for electrical feed
- Maximum spacing 2.5 m
- Suitable for installation as recessed luminaire
- Aluminium channel optionally available with or without surround

	L/W/H	kg	Order no.
1-length			
1/14/24 PMMA FRAME	580/82/100	1,3	22 161 855
1/21/39 PMMA FRAME	880/82/100	2,0	22 161 856
1/28/54 PMMA FRAME	1180/82/100	2,6	22 161 857
1/35/49 PMMA FRAME	1480/82/100	3,3	22 161 858
2-length			
1/28/54 PMMA FRAME	2250/82/100	4,6	22 161 859
1/35/49 PMMA FRAME	2850/82/100	5,9	22 161 860
3-length			
1/28/54 PMMA FRAME	3320/82/100	6,7	22 161 861
1/28/54 PMMA FRAME LB	3216/82/100	6,7	22 161 862
1/35/49 PMMA FRAME	4220/82/100	8,8	22 161 863
1/35/49 PMMA FRAME LB	4116/82/100	8,8	22 161 864
Corner luminaire (not suitable for installation in concrete)			
EL 14/24 PMMA SET FRAME	512/512/100	2,8	22 161 985
EL 21/39 PMMA SET FRAME	812/812/100	3,4	22 161 986

For order handling and configuration of a continuous-row system, please refer to diagram. Continuous-row luminaire, wiring, end-cap set and installation accessories must be ordered separately.



SLOTLIGHT II batten

- Gear tray with offset lampholders for 100% uniform lighting level throughout
- Sheet-steel gear tray in white painted finish
- In 1-lamp diagonal design
- Luminaire pre-wired using halogen-free leads
- 14/24 W luminaires only have Tetris on one side (first or last luminaire)
- "Dimmable DALI" luminaires are fitted with a DALI-controllable electronic ballast
- For 54 W batten luminaires, a new supply input must be provided after every 10th batten luminaire

	L/W/H	kg	Order no.
Batten with dimming facility for continuous lighting configuration			
<i>dimnable Dali</i>			
1/14 W	574/58/34	0,6	42 176 937
1/21 W	874/58/34	0,7	42 176 939
1/24 W	574/58/34	0,6	42 176 941
1/28 W	1174/58/34	0,9	42 176 943
1/35 W	1474/58/34	1,1	42 176 945
1/39 W	874/58/34	0,7	42 176 947
1/49 W	1474/58/34	1,1	42 176 949
1/54 W	1174/58/34	0,9	42 176 951
Batten for light line			
<i>electronic</i>			
1/14 W	574/58/34	0,6	42 176 936
1/21 W	874/58/34	0,7	42 176 938
1/24 W	574/58/34	0,6	42 176 940
1/28 W	1174/58/34	0,9	42 176 942
1/35 W	1474/58/34	1,1	42 176 944
1/39 W	874/58/34	0,7	42 176 946
1/49 W	1474/58/34	1,1	42 176 948
1/54 W	1174/58/34	0,9	42 176 950
Batten with dimming facility for individual luminaires			
<i>dimnable Dali</i>			
1/14 W	574/58/34	0,6	42 176 919
1/21 W	874/58/34	0,7	42 176 921
1/24 W	574/58/34	0,6	42 176 923
1/28 W	1174/58/34	0,9	42 176 925
1/35 W	1474/58/34	1,1	42 176 927
1/39 W	874/58/34	0,7	42 176 929
1/49 W	1474/58/34	1,1	42 176 931
1/54 W	1174/58/34	0,9	42 176 933
Batten for light line, terminal block			
<i>electronic</i>			
1/14 W	574/58/34	0,6	42 176 918
1/21 W	874/58/34	0,7	42 176 920
1/24 W	574/58/34	0,6	42 176 922
1/28 W	1174/58/34	0,9	42 176 924
1/35 W	1474/58/34	1,1	42 176 926
1/39 W	874/58/34	0,7	42 176 928
1/49 W	1474/58/34	1,1	42 176 930
1/54 W	1174/58/34	0,9	42 176 932
Batten with dimming facility for corner luminaires			
<i>dimnable Dali</i>			
EL 1/14 W	602/58/34	0,6	42 177 279
EL 1/21 W	902/58/34	0,7	42 177 281
EL 1/24 W	602/58/34	0,6	42 177 280
EL 1/39 W	902/58/34	0,7	42 177 282
Batten for corner luminaires			
<i>electronic</i>			
EL 1/14 W	602/58/34	0,6	42 177 187
EL 1/21 W	902/58/34	0,7	42 177 189
EL 1/24 W	602/58/34	0,6	42 177 188
EL 1/39 W	902/58/34	0,7	42 177 190



|...| Shared properties SLOTLIGHT II reflectors

- Increases light output ratio
- Fastened to the continuous row luminaire by 2 screws
- The use of high-efficiency lamps is recommended for stricter photometric requirements in terms of glare control and low luminance levels

SLOTLIGHT II top reflector

Order no.

- |...|
- Head reflector made of highly-specular aluminium

Reflector	Order no.
14/24	22 166 363
21/39	22 166 364
28/54	22 166 365
35/49	22 166 366



SLOTLIGHT II corner luminaire reflector

Order no.

- |...|
- Aluminium head reflector

Reflector	Order no.
EL 14/24	22 166 367
EL 21/39	22 166 368



SLOTLIGHT II through-wiring

Order no.

- For wiring multi-length units
- Continuous-row system through-wiring without conductor interfaces for greater electrical safety
- Heat-resistant up to 105 °C
- 3-phase circuits and 1 control circuit
- Only from the reel (number of luminaires required = number of through-wirings required)

Through-wiring

DV 7 X 1.50 mm ² 28/54 HGF	22 161 873
DV 7 X 1.50 mm ² 35/49 HGF	22 161 874

Please order feeder kit separately.



SLOTLIGHT II feeder kit

Order no.

- 5-pole and 2-pole terminals with insulator

Feed-in set

E Set	22 161 875
-------	------------

Please order the feeder kit separately for continuous and semi-continuous row-lighting.



SLOTLIGHT II end-cap set

kg Order no.

- Made of die-cast aluminium in silver-look finish, including cover elements for concealing the end joint of the optic

End caps

ET SET 12	0,1	22 162 315
ET SET 5,5	0,1	22 161 876
ET SET FRAME	0,1	22 161 877



SLOTLIGHT II connector set

- Galvanised straight connector set including screws and light barrier to prevent light escaping from the joints in the aluminium channels when luminaires are surface-mounted or suspended

Connector
VERB SET

kg Order no.

0,3 22 161 882



SLOTLIGHT II accessory for concrete ceilings

- For shorter lengths, the spacer with predetermined breaking point can be cut to length required without any tools

Fixing components
BETON SET 1385

Order no.

22 161 888




SLOTLIGHT II accessories for plaster ceilings

- Continuously adjustable mounting brackets made of aluminium and galvanised steel
- Designed for 2.5 m
- 1 set includes 2 mounting brackets inc. installation accessories

Fixing components
ED SET

kg Order no.

0,4 22 161 889



SLOTLIGHT II supply cable, transparent

- The transparent supply cable is currently not available in a halogen-free version. As an alternative, however, a halogen-free conventional power lead can be supplied on request.

	kg	Order no.
Transparent supply cable 0.75 mm²		
3 x 0,75 mm ² 1,0 m		42 120 919
3 x 0,75 mm ² 1,5 m		42 120 900
3 x 0,75 mm ² 10,0 m	0,5	22 127 714
5 x 0,75 mm ² 1,0 m		22 125 146
5 x 0,75 mm ² 1,5 m		22 125 152
5 x 0,75 mm ² 10,0 m	0,7	22 127 720
Transparent supply cable 1.5 mm²		
3 x 1,5 mm ² 1,0 m		22 157 566
3 x 1,5 mm ² 1,5 m		22 157 567
3 x 1,5 mm ² 10,0 m	0,7	22 157 568
5 x 1,5 mm ² 1,0 m		22 157 569
5 x 1,5 mm ² 1,5 m		22 157 570
5 x 1,5 mm ² 10,0 m	0,7	22 157 571

Please note: the 0.75 mm² transparent supply cable is only designed to supply one single luminaire. To comply with safety regulations, a supply cable with 1.5 mm² cross-section must be used for through-wiring.

**SLOTLIGHT II suspension cord with ceiling rose**

- Elliptical ceiling rose made of plastic, with terminal device for 6 poles and earth
- Made of galvanised steel cord
- Cord suspension and ceiling bracket are nickel-plated
- Continuous height adjustment
- Fastening spring made of stainless steel
- With V2A spring clip
- Diameter 1.8 mm
- Maximum spacing 2 m

	H	Order no.
Suspension cord, white		
ASI1000	1000	22 156 788
ASI2000	2000	22 156 789
Suspension cord, silver		
ASI1000	1000	22 157 368
ASI2000	2000	22 157 369

**SLOTLIGHT II AD ceiling bracket**

- Fastening spring made of stainless steel
- Fastened to trunking using CLIX technology
- Maximum spacing 2.5 m

	L/W/H	kg	Order no.
Ceiling bracket			
TECTON/METRUM AD	28/42/9	0,2	22 169 175



SLOTLIGHT I LED Replacement



- Gear tray with offset lampholders for 100% uniform lighting level throughout
- Colour temperature 4000 K (neutral white)
- Colour rendering index: Ra > 80
- Chromaticity tolerance between multiple luminaires of up to 3 MacAdam ellipses
- LED service life: 50,000 h before luminous flux drops to 80 % of initial level
- Aluminium gear tray
- Luminaire pre-wired using halogen-free leads

LED-batten

	Order no.
10 W LED 840 L600 IP40	42 182 502
10 W LED 840 L600 TB IP40	42 182 503
15 W LED 840 L900 IP40	42 182 504
15 W LED 840 L900 TB IP40	42 182 505
19 W LED 840 L1200 IP40	42 182 506
19 W LED 840 L1200 TB IP40	42 182 507
24 W LED 840 L1500 IP40	42 182 508
24 W LED 840 L1500 TB IP40	42 182 509

Through-wiring

LED DV 7 x 1,50 mm ² 615 HGF	22 168 763
LED DV 7 x 1,50 mm ² 915 HGF	22 168 760
LED DV 7 x 1,50 mm ² 1215 HGF	22 168 761
LED DV 7 x 1,50 mm ² 1515 HGF	22 168 762

Opal PMMA optic


1166 (1/28)	59 000 398
1466 (1/35)	59 000 399
2195 (2x1/28) LB	59 000 759
2262 (2x1/28)	59 000 400
2862 (2x1/35)	59 000 401
3289 (3x1/28) LB	59 000 518
3356 (3x1/28)	59 000 402
4189 (3x1/35) LB	59 000 519
4256 (3x1/35)	59 000 403
568 (1/14)	59 000 396
866 (1/21)	59 000 397

Beim Umbau der SLOTLIGHT I Anlage auf die effiziente LED Version ist immer die Durchgangsverdrahtung mitzubestellen.





zumtobel.com/office

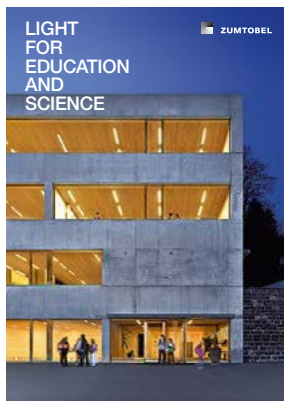


zumtobel.com/education



zumtobel.com/shop



zumtobel.com/hotel

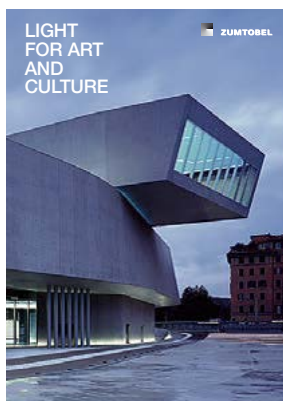


zumtobel.com/culture



zumtobel.com/healthcare



zumtobel.com/industry

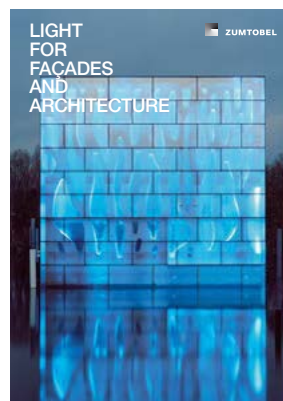

zumtobel.com/facade

Zumtobel, a company of the Zumtobel Group, is an internationally leading supplier of integral lighting solutions for professional indoor and outdoor building lighting applications.

- Offices and Communication
- Education and Science
- Presentation and Retail
- Hotel and Wellness
- Art and Culture
- Health and Care
- Industry and Engineering
- Façades and Architecture

We provide unique customer benefits by integrating technology, design, emotion and energy efficiency. Under the Humanergy Balance concept, we combine the best possible ergonomic lighting quality for an individual's well-being with the responsible use of energy resources. The company's own sales organisations in twenty countries, as well as commercial agencies in fifty other countries, form an international network of experts and design partners providing professional lighting consulting, design assistance and comprehensive services.

Lighting and sustainability

In line with our corporate philosophy *"We want to use light to create worlds of experience, make work easier and improve communications and safety while remaining fully aware of our responsibility to the environment"*, Zumtobel offers energy-efficient high-quality products, while at the same time making sure that our production processes based on the considerate use of resources are environmentally compatible.

zumtobel.com/sustainability



Top quality – with a five-year guarantee.

As a globally leading luminaire manufacturer, Zumtobel provides a five year manufacturer's guarantee on all Zumtobel branded products subject to registration within 90 days from the invoice date and in accordance with the terms of guarantee at zumtobel.com/guarantee.

Order no. 04797445-EN 11/2014 © Zumtobel Lighting GmbH

Technical data was correct at time of going to press.

We reserve the right to make technical changes without notice. Please contact your local sales office for further information. For the sake of the environment: Luxo Light is chlorine-free paper from sustainably managed forests and certified sources.





Tracks and spots



Modular lighting systems



Downlights



Recessed luminaires



Surface-mounted and pendant luminaires



Free-standing and wall-mounted luminaires




Continuous-row systems and individual batten luminaires



High-bay luminaires and floodlight reflector systems



Luminaires with extra protection



Façade, media and outdoor luminaires



Lighting management systems



Emergency lighting



Medical supply systems

United Kingdom

Zumtobel Lighting Ltd.
Chiltern Park
Chiltern Hill, Chalfont St. Peter
Buckinghamshire SL9 9FG
T +44/(0)1753 482650
F +44/(0)1753 480350
uksales@zumtobel.com
zumtobel.co.uk

USA and Canada

Zumtobel Lighting Inc.
3300 Route 9W
Highland, NY 12528
T +1/(0)845/691 6262
F +1/(0)845/691 6289
zli.us@zumtobel.com
zumtobel.us

Australia and New Zealand

Zumtobel Lighting Pty Ltd
333 Pacific Highway
North Sydney, NSW 2060
T +61/(2)8913 5000
F +61/(2)8913 5001
info@zumtobel.com.au
zumtobel.com.au

China

Zumtobel Lighting China
Shanghai office
Room 101,
No 192 YIHONG Technology Park
Tianlin Road, Xuhui District
Shanghai City, 200233, P.R. China
T +86/(21) 6375 6262
F +86/(21) 6375 6285
sales.cn@zumtobel.com
zumtobel.cn

Hong Kong

Zumtobel Lighting Hong Kong
Unit 4319-20, Level 43,
Tower 1, Metroplaza,
223 Hing Fong Road,
Kwai Fong, N.T.
T +852/(0)2503 0466
F +852/(0)2503 0177
info.hk@zumtobel.com

India

Zumtobel Lighting GmbH
Vipul Trade Centre, 406, 4th Floor
Sohna Road, Sector 48,
Gurgaon 122002, Haryana, India
T +91/124 4206885 6886
info.in@zumtobel.com

Singapore

Zumtobel Lighting Singapore
158 Kallang Way # 06-01/02
Singapore 349245
T +65 6844 5800
F +65 6745 7707
info.sg@zumtobel.com

United Arab Emirates

Zumtobel Lighting GmbH
4B Street, Al Quoz Industrial Area
Dubai, United Arab Emirates
T +971/4 3404646
F +971/4 2993531
info@zumtobeluae.ae
zumtobel.ae

Romania

Zumtobel Lighting Romania SRL
Radu Greceanu Street, no.2,
Ground Floor, sector 1
012225 Bucharest
T +40 31225 38 01
F +40 31225 38 04
welcome.ro@zumtobel.com
zumtobel.com

Hungary

Zumtobel Lighting Kft
Váci út 49
1134 Budapest
T +36/(1) 35 00 828
F +36/(1) 35 00 829
welcome@zumtobel.hu
zumtobel.hu

Croatia

ZG Lighting d.o.o.
Radnička cesta 80
10000 Zagreb
T +385/(1) 64 04 080
F +385/(1) 64 04 090
welcome@zumtobel.hr

Bosnia and Herzegovina

ZG Lighting d.o.o.
Topal Osman Pase 18
71000 Sarajevo
M+387 61 172 240
welcome.ba@zumtobel.com

Serbia
ZG Lighting d.o.o.
Beton hala – Karađordeva 2-4
11000 Belgrade
M+381 69 54 44 802
welcome@zumtobel.rs

Czech Republic

Zumtobel Lighting s.r.o.
Jankovcova 2
Praha 7
17000 Praha
T +420/(2) 66 782 200
F +420/(2) 66 782 201
welcome@zumtobel.cz
zumtobel.cz

Slovak Republic

Zumtobel Lighting s.r.o.
Vičie Hrdlo 1,
824 12 Bratislava
welcome@zumtobel.sk
zumtobel.sk

Poland

Zumtobel Licht GmbH Sp.z.o.o.
Platinum III
ul. Woloska 9a
02-583 Warszawa
T +48/(22) 856 74 31
F +48/(22) 856 74 32
welcome@zumtobel.pl
zumtobel.pl

Slovenia

ZG Lighting d.o.o.
Štukljeva cesta 46
1000 Ljubljana
T +386/(1) 5609 820
F +386/(1) 5609 866
si.welcome@zumtobelgroup.com
zumtobel.si

Russia

Zumtobel Lighting GmbH
Official Representative Office
Skakovaya Str. 17
Bld. No 1, Office 1104
125040 Moscow
T +7/(495) 945 36 33
F +7/(495) 945 16 94
info-russia@zumtobel.com
zumtobel.ru

Norway

Zumtobel Belysning
Hoffsveien 4
Postboks 1025 Hoff
0218 Oslo
T +47 22 06 50 50
info.no@zumtobel.com
zumtobel.no

Sweden

Zumtobel Belysning
Birger Jarlsgatan 57
11356 Stockholm
T +46 8 26 26 50
info.se@zumtobel.com
zumtobel.se

Denmark

Zumtobel Belysning
Stamholmen 155, 5. sal
2650 Hvidovre
T +45 35 43 70 00
info.dk@zumtobel.com
zumtobel.dk

Headquarters

Zumtobel Lighting GmbH
Schweizer Strasse 30
Postfach 72
6851 Dornbirn, AUSTRIA
T +43/(0)5572/390-0
info@zumtobel.info

ZG Licht Mitte-Ost GmbH
Grevenmarschstrasse 74-78
32657 Lemgo, GERMANY
T +49/(0)5261 212-0
F +49/(0)5261 212-9000
info@zumtobel.de

zumtobel.com

SLOTLIGHT II

**Recessed, surface-mounted
and pendant luminaire**

The straight-ahead luminaire:
from indoors to outdoors,
even round the corner.
Pure. Uniform. Efficient.

