

OVE Austrian Electrotechnical Association
Eschenbachgasse 9, 1010 Wien, Austria
ZVR: 327279890 | DVR: 1055887 | www.ove.at

OVE Testing & Certification
Kahlenberger Str. 2A, 1190 Wien, Austria
T +43 1 370 58 06 | F +43 1 370 58 06-199



ENEC Certification Body registered under ID # 11.

Validity of ENEC Licences can be checked at www.enec.com

LICENCE

to use the European Mark



Licence No. **251-183**

Date of issue: Wien, 2016 12 15

OVE the Austrian Electrotechnical Association as signatory to the **"Agreement on the use of a commonly agreed Mark of Conformity for certain electrical equipment complying with European Standards"** hereby grants the right to label the products mentioned hereunder and listed in the Annex with the Mark(s) shown above to the following company

Licenceholder: **Zumtobel Lighting GmbH**
Schweizer Str. 30
6851 Dornbirn
Austria

Product: **Fixed general purpose luminaires**

Trade Mark:  **ZUMTOBEL**

Series/Type: **SLOT Infinity slim**

Basis for this given right is the conformity of the products with the requirements of the relevant Standard(s) as listed in the Annex and the fulfilment of articles 8 and 9 of the ENEC-Agreement by the manufacturer. This licence refers to the tested specimen and to all products manufactured strictly identical to the submitted one.

This licence has been issued under the presumption and conditional on the fact that the licensee holds all necessary legal rights with regard to the product presented for testing and certification.

Österreichischer Verband für Elektrotechnik
Head of Testing & Certification

Digitally signed by W. Martin
Email=w.martin@ove.at
Dipl.-Ing. W. Martin



OVE Testing & Certification

Accredited by the Federal Ministry of Science, Research and Economy as Certification Body for products within the scope as given in the official decree and published under www.en.bmwf.gv.at/accreditation



<i>Hersteller</i> <i>Manufacturer</i>	Zumtobel Lighting GmbH Schweizer Str. 30 6851 Dornbirn Austria
<i>Fertigungsstätte(n)</i> <i>Factory location(s)</i>	Zumtobel Lighting GmbH Schweizer Str. 30 6851 Dornbirn Austria
<i>Typenbezeichnung</i> <i>Type reference</i>	SLOIN slim .. LED..., see page 5
<i>Prüfbericht</i> <i>Test Report</i>	TR-251-0019-01
<i>Nationale Bestimmung(en)</i> <i>National Standard(s)</i>	ÖVE/ÖNORM EN 60598-1:2015-11-01 ÖVE-LI/EN 60598-2-1:1989
<i>Europannorm(en)</i> <i>European Standard(s)</i>	EN 60598-1:2015 EN 60598-2-1:1989
<i>Ersatz für Zertifikat</i> <i>Superseded licence</i>	--
<i>Anmerkung(en)</i> <i>Remark(s)</i>	Light source classified as RG1 according to EN 62471:2008. SMT-procedure

<i>Nennspannung</i> <i>Rated voltage</i>	220-240 V, 0/50/60 Hz
<i>Anzahl und Leistung der Lampen</i> <i>Rated wattage and number of lamps</i>	Opal (PC) / Office (PCO) / Wallwasher (WW): 2/3/4/5/6/7/8x LEM S32 12W 2x LEM S32 12W + 2x LEM S16 6W 2/3/4/5/6/7x LEM S32 12W + 1x LEM S16 6W
<i>Lampentyp(en)</i> <i>Lamp identification</i>	LED modules: LEM S32, LEM S16 (ILCOS: DSL)
<i>Schutzgrad</i> <i>Degree of protection</i>	IP20
<i>Netzanschluß</i> <i>Supply connection</i>	Screwless terminals
<i>Befestigungsfläche</i> <i>Supporting surface</i>	Normally flammable surface
<i>Schutzklasse</i> <i>Class of protection</i>	CI.I
<i>Beschreibung des Aufbaus</i> <i>Description of construction</i>	Ceiling or suspended mounting LED luminaire for office applications made of silver coloured powder coated aluminium. Endless cover made of polycarbonate. The LED bar is an aluminium profile and the LED modules, screwless terminals and LED driver are fixed on it.
<i>Zusatzinformation</i> <i>Additional information</i>	--

<i>Bauteil Component</i>	<i>Code Code</i>	<i>Hersteller Manufacturer</i>	<i>Typenbezeichnung Type Reference</i>	<i>Konformitätszeichen Mark(s) of conformity</i>
<i>Ballast</i>	B	Tridonic	LCA ...one4all...PRE	ENEC 11
<i>LED module</i>	B	Zumtobel	LEM S16 6W ... 243x30...	OVE
	B	Zumtobel	LEM S32 12W ... 493x30...	OVE
<i>Terminal</i>	A	Electro Terminal	SLK5/5; 450V; 24A; T85; 0,5-2,5mm²	ENEC 11
<i>Wiring</i>	A	Leoni	Ecosense S05G-U 300/500V; 0,5-1,0mm²; 110°C	BBJ
	A	Leoni	Ecosense S05G-K 300/500V; 0,5-1,0mm²; 110°C	BBJ
	A	Leoni	Ecosense S07G-U 450/750V; 1,5mm²; 110°C	BBJ

- A The component is replaceable with another one, also certified, with equivalent characteristics.
 B The component is replaceable if authorised by the test house.
 C Integrated component tested together with the appliance.
 D Alternative component.

SLOIN slim .. LED....-... LDE L....

Option

```
F.....Frame
none
```

Variant

PCOOffice

PCOpal

WW Wallwasher

Length of luminaire

775 (corner luminaire)

1004 - 4004

Type of ballast

LDE DALI dimmable

Luminous colour

827, 830, 835, 840

Lumen output

1400 - 6600

Light source

Construction


SL.....Single Luminaire

CL.....Corner Luminaire

Series

Typecode Label:

SLOIN slim B LED... LDE L.... ..

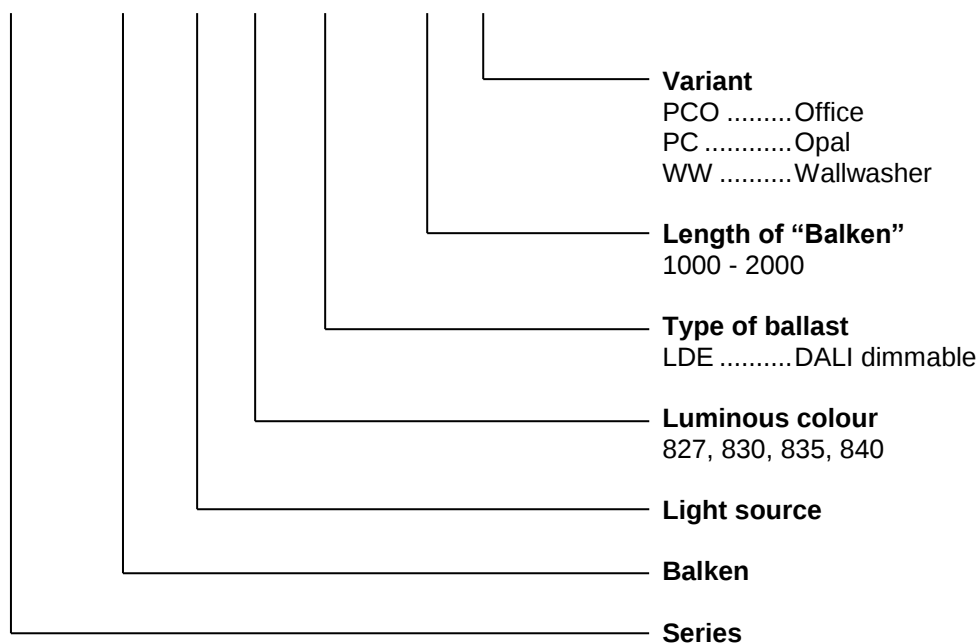

Accessories:

SLOIN slim A ASI1
SLOIN slim A ASI2
SLOIN slim A spring
SLOIN SLIM ASI1 SR
SLOIN SLIM ASI1 WH
SLOIN SLIM ASI2 SR
SLOIN SLIM ASI2 WH
SLOIN slim CON SET
SLOIN slim COV L10000 PC
SLOIN slim COV L10000 PCO
SLOIN slim COV L10000 WW
SLOIN slim COV L15000 PC
SLOIN slim COV L20000 PC
SLOIN slim COV L20000 PCO
SLOIN slim COV L20000 WW
SLOIN slim COV L6000 PC
SLOIN slim COV L6000 PCO
SLOIN slim COV L6000 WW
SLOIN slim COV L8000 PC
SLOIN slim DV Kit
SLOIN slim EC SET L20
SLOIN slim EC SET L20 F
SLOIN slim EC SET L9
SLOIN slim EC SET L9 F
SLOIN slim mask plate GY