




ZUMTOBEL



reddot winner 2021  
best of the best

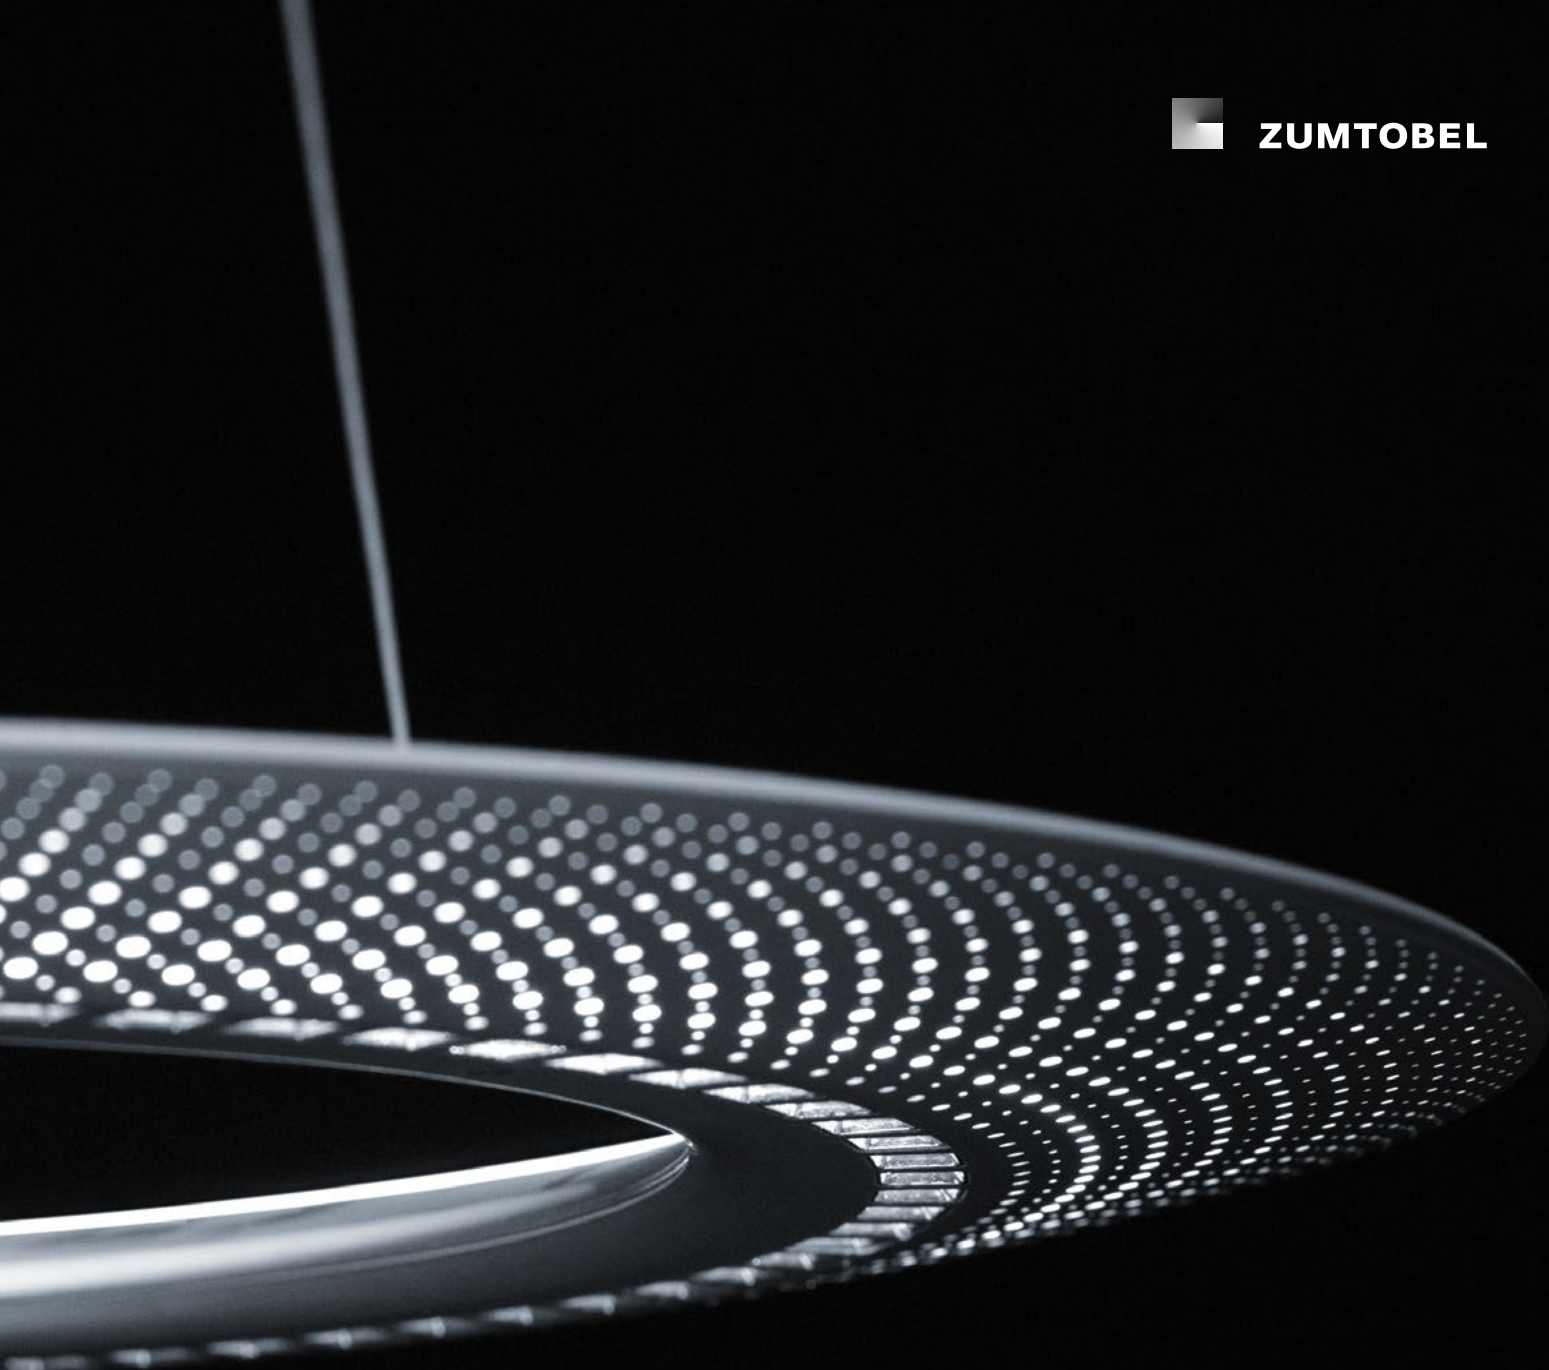



## AMBITUS

A SYMPHONY OF LIGHT AND SPACE

light | AWARDS  
MIDDLE EAST 2023

From an idea...

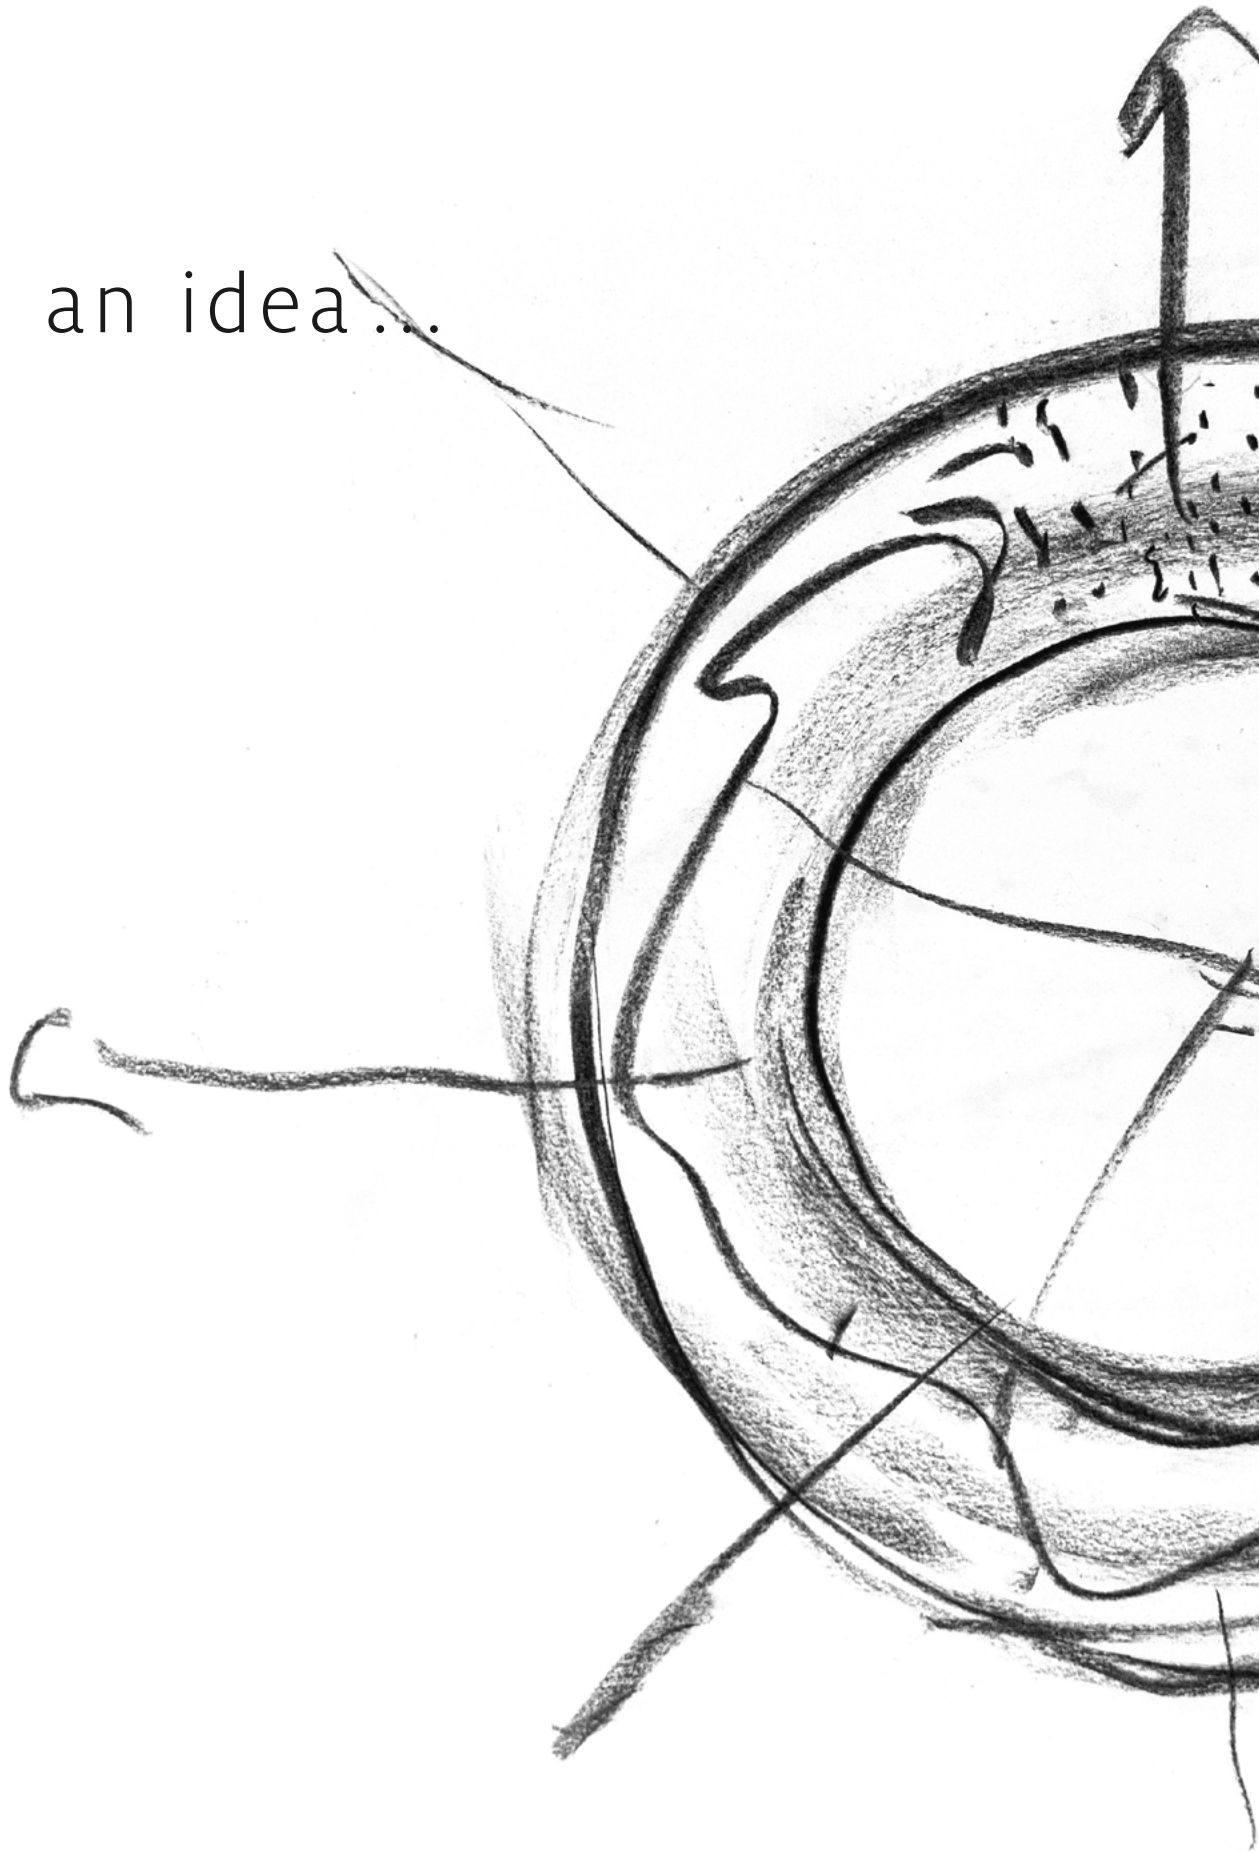

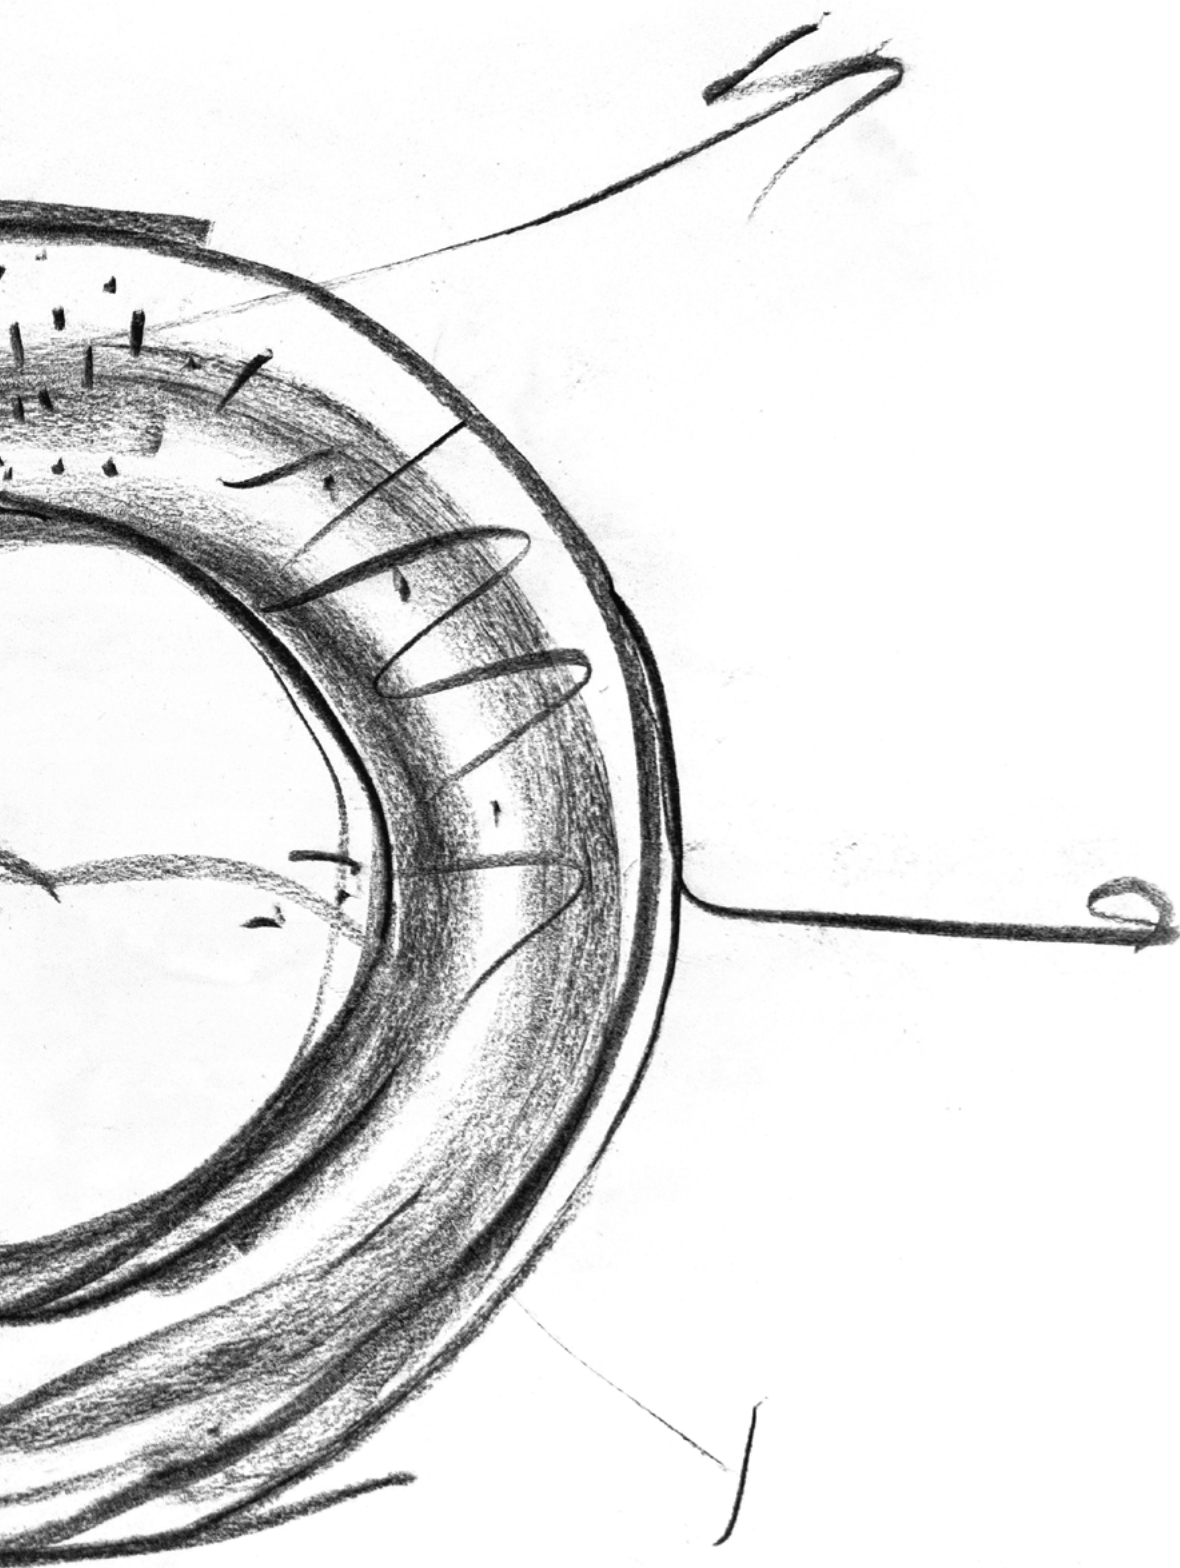

Yng. G. G. G.






...to the award winning product.




*“Purely linear lighting  
can no longer meet  
the needs of complex,  
organic building design.  
AMBITUS solves this  
geometric paradox.”*

Yorgo Lykouria – Rainlight Studio, London | UK

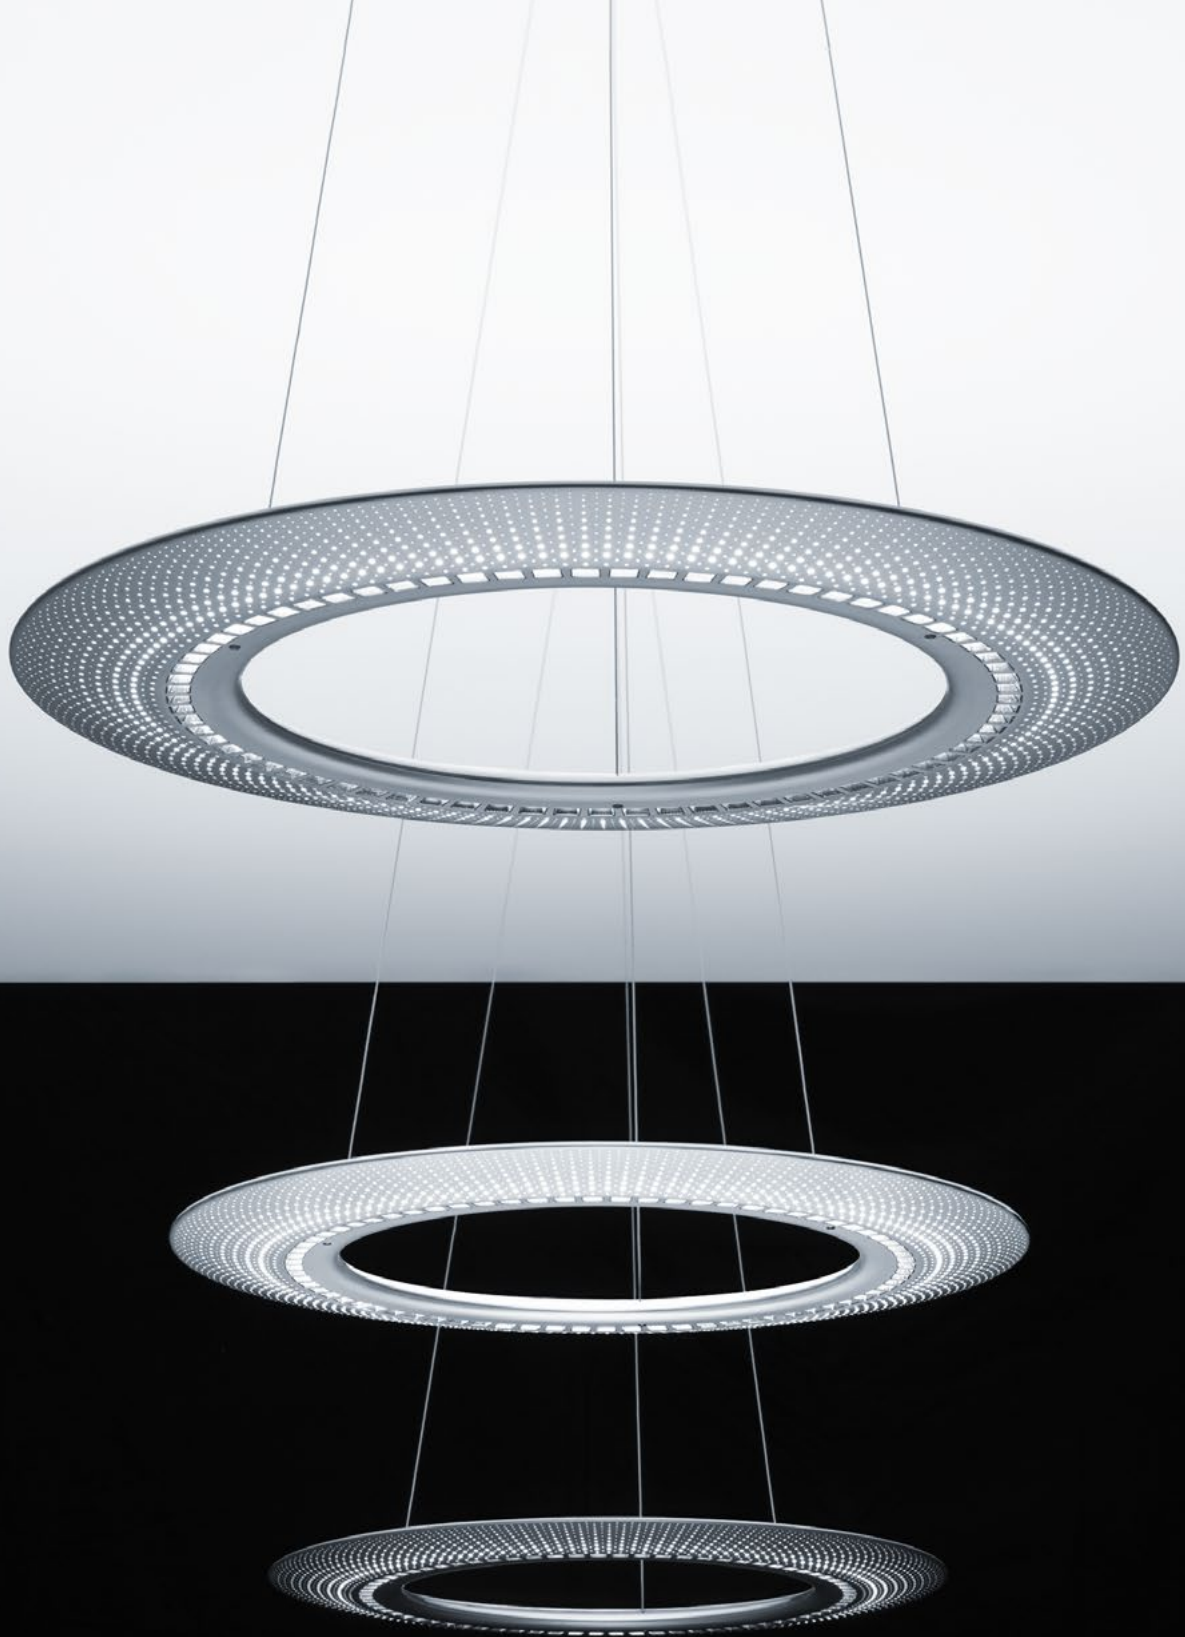


## THE HARMONY OF OPPOSITES.

AMBITUS has it all. This exceptional office light lives up to this claim in every way: advanced technology meets multiple-award-winning design. Optional diffuse indirect light meets precise, workstation-compatible direct lighting. Peak brightness meets excellent glare control. AMBITUS unites apparent opposites in a slim, deep-drawn aluminium body that floats in the space with a light and delicate appearance, creating a lighting effect as round as the luminaire's shape. Harmonious light, inspired by the sun.

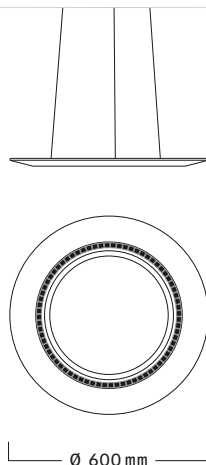


20%  
indirect  
light distribution




100%  
direct  
light distribution



100%  
indirect  
light distribution



100%  
direct  
light distribution



## BRILLIANT, GLARE-FREE LIGHT.

Be it for a meeting room, desk or lobby, AMBITUS creates powerful light that adapts to different office settings. Encouraging social interaction, creating a focused work atmosphere or boosting brand image: the huge range of lighting options gives lighting designers and users incredible flexibility.  
Maximum light, minimum glare.




### **AMBITUS clear**

Wide-beam indirect light distribution for particularly uniform ceiling illumination – ideal for rooms with low ceiling heights. The clear optic enhances an open, light-filled spatial impression.



### **AMBITUS opal**

Minimalist design with a “clean look” – perfect for galleries or rooms with higher ceilings where the luminaire is visible from above. The opal cover provides gentle light distribution and effectively reduces glare.

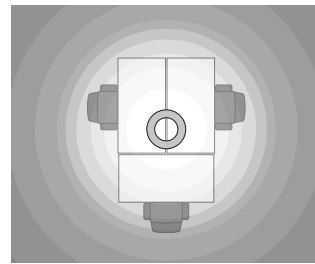

### **One for Three**

Thanks to its excellent luminous flux of up to 10 000 lumens, AMBITUS illuminates three workstations. Top lighting performance with optimal visual comfort ( $L < 1000 \text{ cd/m}^2$  at  $65^\circ$ ). Faceted micro-reflectors minimise glare and ensure outstanding  $UGR < 13$  across all variants.

#### AMBITUS opal

Minimalist design with a "clean look" - perfect for galleries or rooms with higher ceilings where the luminaire is visible from above. The opal cover provides gentle light distribution and effectively reduces glare.

#### AMBITUS clear


Wide-beam indirect light distribution for particularly uniform ceiling illumination - ideal for rooms with low ceiling heights. The clear optic enhances an open, light-filled spatial impression.

Diffuse, undirected light and precise direct light can be controlled separately on the tunableWhite version. The luminaire is adjusted using DALI or Bluetooth with a simple control element or handy smartphone app.



TunableWhite adds an emotional element to the visual component of AMBITUS office lighting. From warm white (2700K) to daylight white (6500K), the light temperature can be chosen to harmonise with our activities at different times of the day.

Micro-reflectors in a circular array provide strong contrast and a stunning light effect, making the room and objects particularly vivid while visually enhancing structures, almost tangibly.

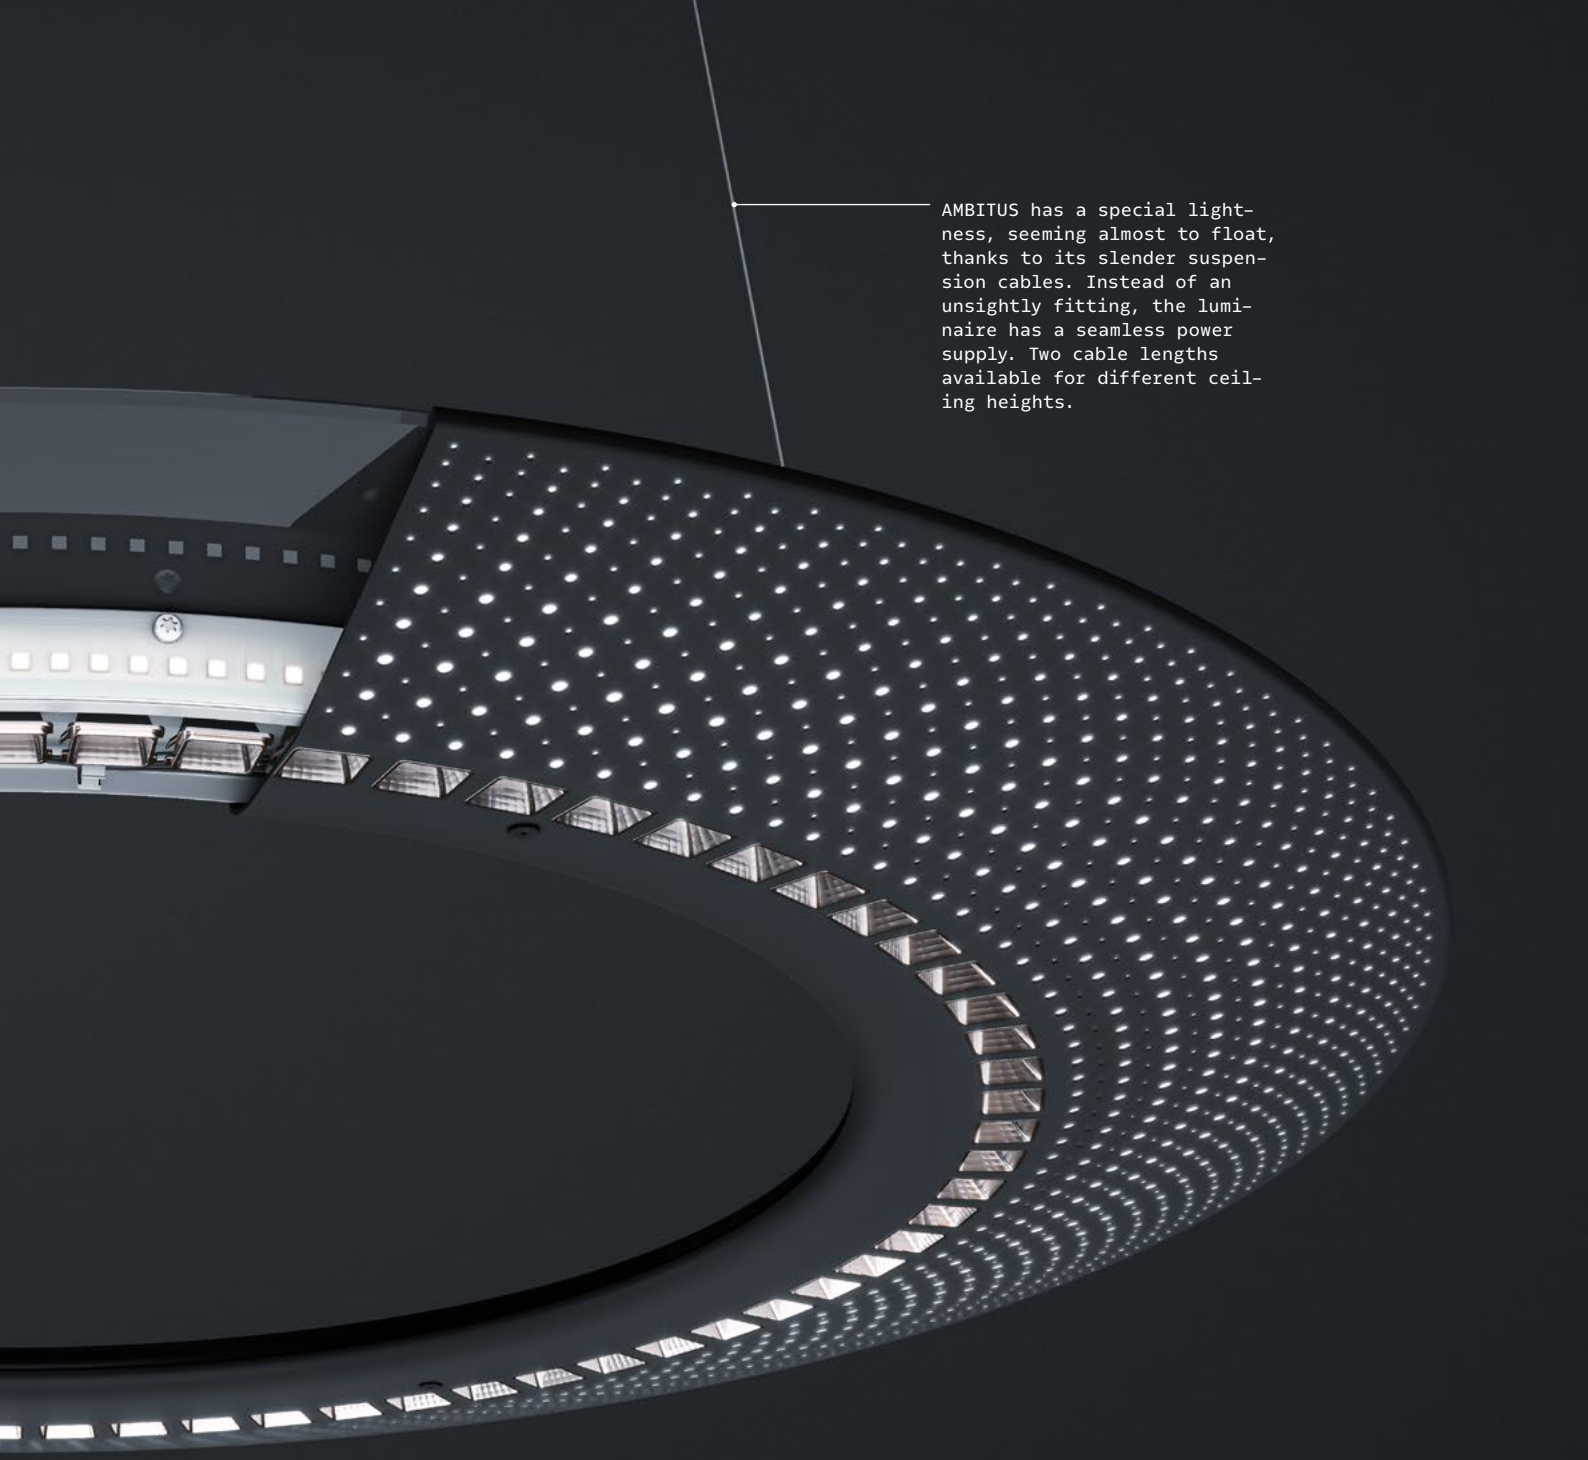

AMBITUS has a special lightness, seeming almost to float, thanks to its slender suspension cables. Instead of an unsightly fitting, the luminaire has a seamless power supply. Two cable lengths available for different ceiling heights.

## **A CELESTIAL BODY FOR THE OFFICE.**

AMBITUS mimics sunlight in an office setting. Just 24 mm in depth, it hangs softly in the room with an invisible power supply. The aluminium light ring is captivating due to its minimalist shape and maximum luminosity. The contrast between the fixture and the brilliant light is stunning: a perfect blend of aesthetics and technology.



# AMBITUS



|                                                                                                       |                                                                                                                                    |                                                                                            |                                                                                             |                                |
|-------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|--------------------------------|
| <b>Dimension:</b>                                                                                     | Ø 600 mm, depth 24 mm                                                                                                              |                                                                                            |                                                                                             |                                |
| <b>Housing material:</b>                                                                              | aluminium                                                                                                                          |                                                                                            |                                                                                             |                                |
| <b>Luminous flux:</b>                                                                                 | 10 000 lm<br>up to 135 lm/W                                                                                                        |                                                                                            |                                                                                             |                                |
| <b>Mounting type:</b>                                                                                 | recessed or surface-mounted ceiling rose<br>3 m or 5 m suspension length                                                           |                                                                                            |                                                                                             |                                |
| <b>Colour rendering:</b>                                                                              | CRI > 90                                                                                                                           |                                                                                            |                                                                                             |                                |
| <b>Glare control:</b>                                                                                 | UGR < 13 and L < 1000 cd/m² at 65°                                                                                                 |                                                                                            |                                                                                             |                                |
| <b>Colour temperature:</b>                                                                            | 3000 K, 4000 K, tunableWhite                                                                                                       |                                                                                            |                                                                                             |                                |
| <b>Controls:</b>                                                                                      | DALI dimmable, basicDIM Wireless<br><br>on the tunableWhite version, the direct and indirect light<br>can be controlled separately |                                                                                            |                                                                                             |                                |
| <b>Housing colour:</b>                                                                                |  black                                          |  silver |  white | <input type="checkbox"/> RAL * |
| <b>Ceiling rose:</b>                                                                                  |  black                                          |  silver |  white | <input type="checkbox"/> RAL * |
| The colours of the housing and ceiling rose can be customised and ordered in any desired combination. |                                                                                                                                    |                                                                                            |                                                                                             |                                |

\*on request

T H E   L I G H T



#75YEARSZUMTOBEL

[zumtobel.com/contact](https://zumtobel.com/contact)